

DATA SHEET

74LVC109

Dual $\overline{JK}$ flip-flop with set and reset;
positive-edge trigger

Product specification
Supersedes data of 1998 Apr 28

2004 Mar 18

Dual $\overline{JK}$ flip-flop with set and reset; positive-edge trigger

74LVC109

FEATURES

- 5 V tolerant inputs for interfacing with 5 V logic
- Wide supply voltage range from 1.2 to 3.6 V
- CMOS low power consumption
- Direct interface with TTL levels
- Inputs accept voltages up to 5.5 V
- Complies with JEDEC standard no. 8-1A
- ESD protection:
HBM EIA/JESD22-A114-A exceeds 2000 V
MM EIA/JESD22-A115-A exceeds 200 V.
- Specified from -40 to $+85$ °C and -40 to $+125$ °C.

DESCRIPTION

The 74LVC109A is a high-performance, low-voltage, Si-gate CMOS device, superior to most advanced CMOS compatible TTL families.

The 74LVC109A is a dual positive edge triggered $\overline{JK}$ flip-flop featuring individual J and $\overline{K}$ inputs, clock (CP) inputs, set ($\overline{SD}$) and reset ($\overline{RD}$) inputs and complementary Q and $\overline{Q}$ outputs.

The set and reset are asynchronous active LOW inputs and operate independently of the clock input.

The J and $\overline{K}$ inputs control the state changes of the flip-flops as described in the mode select function table. The J and $\overline{K}$ inputs must be stable one set-up time prior to the LOW-to-HIGH clock transition for predictable operation. The $\overline{JK}$ design allows operation as a D-type flip-flop by tying the J and $\overline{K}$ inputs together.

Schmitt-trigger action in the clock input makes the circuit highly tolerant to slower clock rise and fall times.

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25$ °C; $t_r = t_f \leq 2.5$ ns.

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHL}/t_{PLH}	propagation delay nCP to nQ and nCP to n $\overline{Q}$	$C_L = 50$ pF; $R_L = 500$ Ω ; $V_{CC} = 3.3$ V	3.8	ns
	propagation delay n $\overline{SD}$ to nQ and n $\overline{RD}$ to n $\overline{Q}$	$C_L = 50$ pF; $R_L = 500$ Ω ; $V_{CC} = 3.3$ V	3.2	ns
	propagation delay n $\overline{SD}$ to n $\overline{Q}$ and n $\overline{RD}$ to nQ	$C_L = 50$ pF; $R_L = 500$ Ω ; $V_{CC} = 3.3$ V	3.5	ns
f_{max}	maximum clock frequency	$C_L = 50$ pF; $R_L = 500$ Ω ; $V_{CC} = 3.3$ V	330	MHz
C_I	input capacitance		5.0	pF
C_{PD}	power dissipation capacitance per flip-flop	notes 1 and 2	23	pF

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μ W).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in Volts;

N = total load switching outputs;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.

2. The condition is $V_I = \text{GND to } V_{CC}$.

Dual $\overline{JK}$ flip-flop with set and reset; positive-edge trigger

74LVC109

FUNCTION TABLE

See note 1.

OPERATING MODES	INPUT					OUTPUT	
	$\overline{nSD}$	$\overline{nRD}$	$\overline{nCP}$	$\overline{nJ}$	$\overline{nK}$	$\overline{nQ}$	$\overline{nQ}$
Asynchronous set	L	H	X	X	X	H	L
Asynchronous reset	H	L	X	X	X	L	H
Undetermined	L	L	X	X	X	H	H
Toggle	H	H	$\uparrow$	h	l	$\overline{q}$	q
Load 0 (reset)	H	H	$\uparrow$	l	l	L	H
Load 1 (set)	H	H	$\uparrow$	h	h	H	L
Hold no change	H	H	$\uparrow$	l	h	q	$\overline{q}$

Note

1. H = HIGH voltage level;
h = HIGH voltage level one set-up time prior to the LOW-to-HIGH CP transition;
L = LOW voltage level;
l = LOW voltage level one set-up time prior to the LOW-to-HIGH CP transition;
q = lower case letters indicate the state of the referenced output one set-up time prior to the LOW-to-HIGH CP transition;
X = don't care;
 $\uparrow$ = LOW-to-HIGH CP transition.

ORDERING INFORMATION

TYPE NUMBER	PACKAGE				
	TEMPERATURE RANGE	PINS	PACKAGE	MATERIAL	CODE
74LVC109D	-40 to +125 °C	16	SO16	plastic	SOT109-1
74LVC109DB	-40 to +125 °C	16	SSOP16	plastic	SOT338-1
74LVC109PW	-40 to +125 °C	16	TSSOP16	plastic	SOT403-1

Dual J $\bar{K}$ flip-flop with set and reset;
positive-edge trigger

74LVC109

PINNING

PIN	SYMBOL	DESCRIPTION
1	1 $\bar{R}D$	asynchronous reset input (active LOW)
2	1J	synchronous input
3	1 $\bar{K}$	synchronous input
4	1CP	clock input (LOW-to-HIGH; edge-triggered)
5	1 $\bar{S}D$	asynchronous set input (active LOW)
6	1Q	true flip-flop output
7	1 $\bar{Q}$	complement flip-flop output
8	GND	ground (0 V)
9	2 $\bar{Q}$	complement flip-flop output
10	2Q	true flip-flop output
11	2 $\bar{S}D$	asynchronous set input (active LOW)
12	2CP	clock input (LOW-to-HIGH; edge-triggered)
13	2 $\bar{K}$	synchronous input
14	2J	synchronous input
15	2 $\bar{R}D$	asynchronous reset input (active LOW)
16	V _{CC}	supply voltage

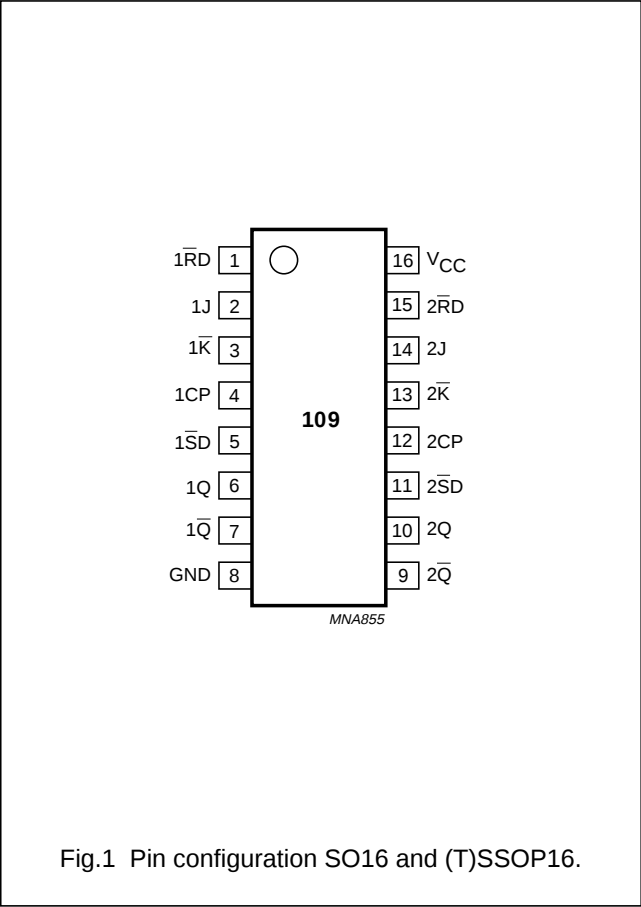


Fig.1 Pin configuration SO16 and (T)SSOP16.

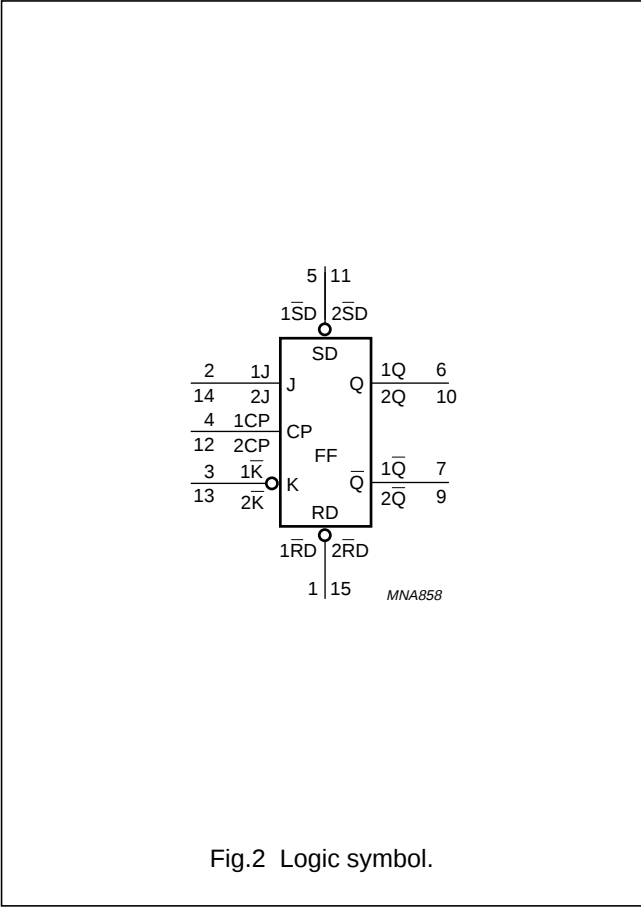


Fig.2 Logic symbol.

Dual $\overline{J}\overline{K}$ flip-flop with set and reset;
positive-edge trigger

74LVC109

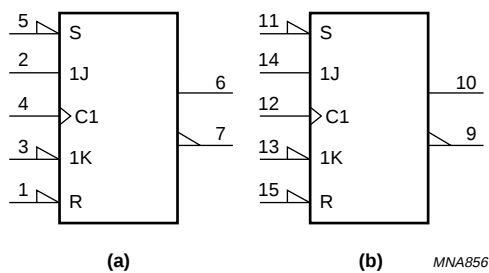


Fig.3 IEC logic symbol.

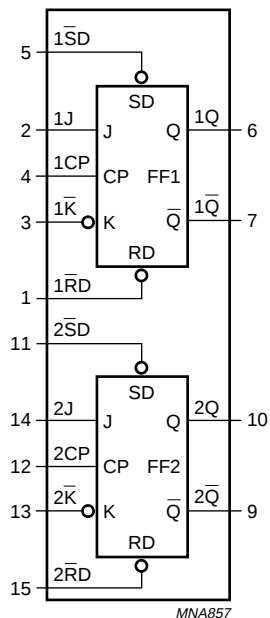


Fig.4 Functional diagram.

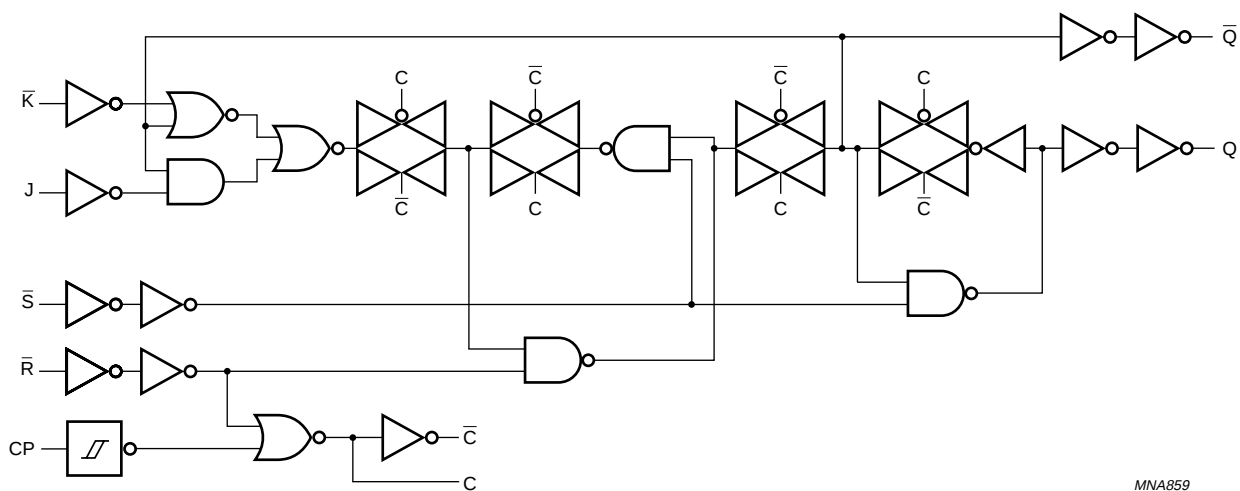


Fig.5 Logic diagram (one flip-flop).

Dual $\overline{JK}$ flip-flop with set and reset; positive-edge trigger

74LVC109

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CC}	supply voltage	for maximum speed performance	2.7	3.6	V
		for low-voltage applications	1.2	3.6	V
V_I	input voltage		0	5.5	V
V_O	output voltage		0	V_{CC}	V
T_{amb}	ambient temperature	in free air	-40	+125	°C
t_r, t_f	input rise and fall times	$V_{CC} = 1.2$ to 2.7 V	0	20	ns/V
		$V_{CC} = 2.7$ to 3.6 V	0	10	ns/V

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134); voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CC}	supply voltage		-0.5	+6.5	V
I_{IK}	input diode current	$V_I < 0$	-	-50	mA
V_I	input voltage	note 1	-0.5	+6.5	V
I_{OK}	output diode current	$V_O > V_{CC}$ or $V_O < 0$	-	± 50	mA
V_O	output voltage	note 1	-0.5	$V_{CC} + 0.5$	V
I_O	output source or sink current	$V_O = 0$ to V_{CC}	-	± 50	mA
I_{CC}, I_{GND}	V_{CC} or GND current		-	± 100	mA
T_{stg}	storage temperature		-65	+150	°C
P_{tot}	power dissipation	$T_{amb} = -40$ to $+125$ °C; note 2	-	500	mW

Notes

1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
2. For SO16 packages: above 70 °C the value of P_{tot} derates linearly with 8 mW/K.
For (T)SSOP16 packages: above 60 °C the value of P_{tot} derates linearly with 5.5 mW/K.

Dual $\overline{JK}$ flip-flop with set and reset; positive-edge trigger

74LVC109

DC CHARACTERISTICS

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		OTHER	V _{CC} (V)				
T _{amb} = −40 to 85 °C; note 1							
V _{IH}	HIGH-level input voltage		1.2	V _{CC}	−	−	V
			2.7 to 3.6	2.0	−	−	V
V _{IL}	LOW-level input voltage		1.2	−	−	GND	V
			2.7 to 3.6	−	−	0.8	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL} I _O = −100 μA I _O = −12 mA I _O = −12 mA I _O = −24 mA	2.7 to 3.6	V _{CC} − 0.2	V _{CC}	−	V
			2.7	V _{CC} − 0.5	−	−	V
			3.0	V _{CC} − 0.6	−	−	V
			3.0	V _{CC} − 0.8	−	−	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL} I _O = 100 μA I _O = 12 mA I _O = 24 mA	2.7 to 3.6	−	GND	0.2	V
			2.7	−	−	0.4	V
			3.0	−	−	0.55	V
I _{LI}	input leakage current	V _I = 5.5 V or GND	3.6	−	±0.1	±5	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	3.6	−	0.1	10	μA
ΔI _{CC}	additional quiescent supply current per input pin	V _I = V _{CC} − 0.6 V; I _O = 0 A	2.7 to 3.6	−	5	500	μA

Dual JK flip-flop with set and reset;
positive-edge trigger

74LVC109

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		OTHER	V _{CC} (V)				
T _{amb} = −40 to 125 °C							
V _{IH}	HIGH-level input voltage		1.2	V _{CC}	−	−	V
			2.7 to 3.6	2.0	−	−	V
V _{IL}	LOW-level input voltage		1.2	−	−	GND	V
			2.7 to 3.6	−	−	0.8	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL} I _O = −100 μA I _O = −12 mA I _O = −12 mA I _O = −24 mA	2.7 to 3.6	V _{CC} − 0.3	−	−	V
			2.7	V _{CC} − 0.65	−	−	V
			3.0	V _{CC} − 0.75	−	−	V
			3.0	V _{CC} − 1.0	−	−	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL} I _O = 100 μA I _O = 12 mA I _O = 24 mA	2.7 to 3.6	−	−	0.3	V
			2.7	−	−	0.6	V
			3.0	−	−	0.8	V
I _{LI}	input leakage current	V _I = 5.5 V or GND	3.6	−	−	±20	μA
I _{CC}	quiescent supply current	V _I = V _{CC} or GND; I _O = 0 A	3.6	−	−	40	μA
ΔI _{CC}	additional quiescent supply current per input pin	V _I = V _{CC} − 0.6 V; I _O = 0 A	2.7 to 3.6	−	−	5000	μA

Note

1. All typical values are measured at T_{amb} = 25 °C.

Dual JK flip-flop with set and reset; positive-edge trigger

74LVC109

AC CHARACTERISTICS

GND = 0 V; $t_r = t_f \leq 2.5$ ns; $C_L = 50$ pF; $R_L = 500$ Ω .

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		WAVEFORMS	V _{CC} (V)				
T _{amb} = −40 to 85 °C; note 1							
t _{PHL} /t _{PLH}	propagation delay nCP to nQ and nCP to nQ̄	see Figs 6 and 8	1.2	–	15	–	ns
			2.7	1.5	2.8	7.3	ns
			3.0 to 3.6	1.0	3.8 ⁽²⁾	6.8	ns
t _{PLH}	propagation delay nSD̄ to nQ and nRD̄ to nQ̄	see Figs 7 and 8	1.2	–	16	–	ns
			2.7	1.5	4.0	8.2	ns
			3.0 to 3.6	1.0	3.2 ⁽²⁾	7.0	ns
t _{PHL}	propagation delay nSD̄ to nQ̄ and nRD̄ to nQ	see Figs 7 and 8	1.2	–	13	–	ns
			2.7	1.5	4.7	7.1	ns
			3.0 to 3.6	1.0	3.5 ⁽²⁾	6.5	ns
t _w	clock pulse width HIGH or LOW	see Fig. 6	3.0 to 3.6	3.3	2.0	–	ns
	set or reset pulse width HIGH or LOW	see Fig. 7	3.0 to 3.6	3.0	–	–	ns
t _{rem}	removal time nSD̄, nRD̄ to nCP	see Fig. 7	3.0 to 3.6	3.0	–	–	ns
t _{su}	set-up time nJ and nK̄ to CP	see Fig. 6	3.0 to 3.6	2.5	–	–	ns
t _h	hold time nJ and nK̄ to nCP	see Fig. 6	3.0 to 3.6	2.0	–	–	ns
f _{max}	maximum clock pulse frequency	see Fig. 6	3.0 to 3.6	150	330	–	MHz
t _{sk(0)}	skew	note 3	3.0 to 3.6	–	–	1.0	ns

Dual $\overline{JK}$ flip-flop with set and reset;
positive-edge trigger

74LVC109

SYMBOL	PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
		WAVEFORMS	V _{CC} (V)				
T _{amb} = −40 to 125 °C							
t _{PHL} /t _{PLH}	propagation delay nCP to nQ and nCP to nQ̄	see Figs 6 and 8	2.7	1.5	–	9.5	ns
			3.0 to 3.6	1.0	–	8.5	ns
t _{PLH}	propagation delay nSD̄ to nQ and nRD̄ to nQ̄	see Figs 7 and 8	2.7	1.5	–	10.5	ns
			3.0 to 3.6	1.0	–	9.0	ns
t _{PHL}	propagation delay nSD̄ to nQ̄ and nRD̄ to nQ	see Figs 7 and 8	2.7	1.5	–	9.0	ns
			3.0 to 3.6	1.0	–	8.5	ns
t _W	clock pulse width HIGH or LOW	see Fig. 6	3.0 to 3.6	3.3	–	–	ns
	set or reset pulse width HIGH or LOW	see Fig. 7	3.0 to 3.6	3.0	–	–	ns
t _{rem}	removal time nSD̄, nRD̄ to nCP	see Fig. 7	3.0 to 3.6	3.0	–	–	ns
t _{su}	set-up time nJ and nK̄ to CP	see Fig. 6	3.0 to 3.6	2.5	–	–	ns
t _h	hold time nJ and nK̄ to nCP	see Fig. 6	3.0 to 3.6	2.0	–	–	ns
f _{max}	maximum clock pulse frequency	see Fig. 6	3.0 to 3.6	150	–	–	MHz
t _{sk(0)}	skew	note 3	3.0 to 3.6	–	–	1.5	ns


Notes

1. All typical values are measured at $T_{amb} = 25\text{ }^{\circ}\text{C}$.
2. These typical values are measured at $V_{CC} = 3.3\text{ V}$.
3. Skew between any two outputs of the same package switching in the same direction. This parameter is guaranteed by design.

Dual J $\bar{K}$ flip-flop with set and reset; positive-edge trigger

74LVC109

AC WAVEFORMS

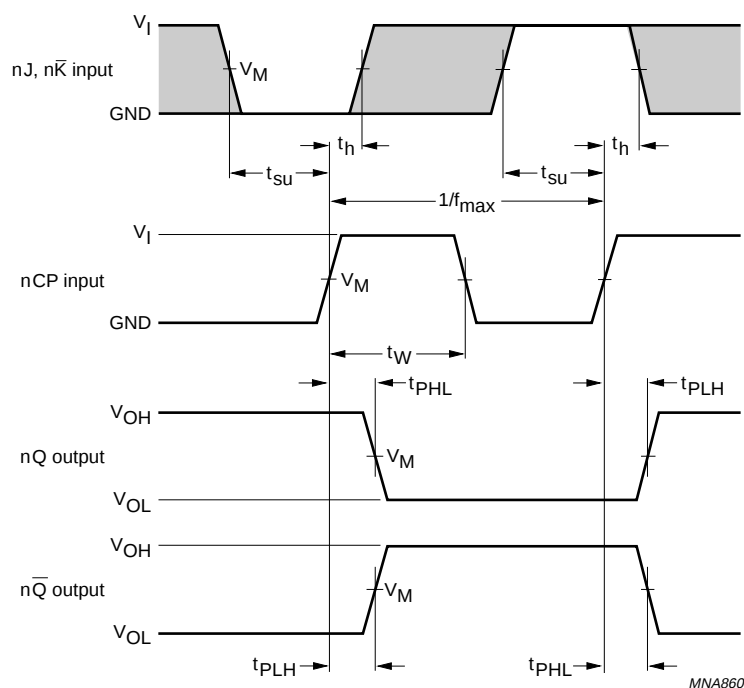

$V_M = 1.5 \text{ V}$ at $V_{CC} \geq 2.7 \text{ V}$.

$V_M = 0.5V_{CC}$ at $V_{CC} < 2.7 \text{ V}$.


V_{OL} and V_{OH} are typical output voltage drop that occur with the output load.

The shaded areas indicate when the input is permitted to change for predictable output performance.

Fig.6 Clock input (nCP) to output (nQ and n $\bar{Q}$) propagation delays, the clock pulse width, the nJ and n $\bar{K}$ to nCP set-up, the nCP to nJ and n $\bar{K}$ hold times and the maximum clock pulse frequency.

Dual $\overline{JK}$ flip-flop with set and reset; positive-edge trigger

74LVC109

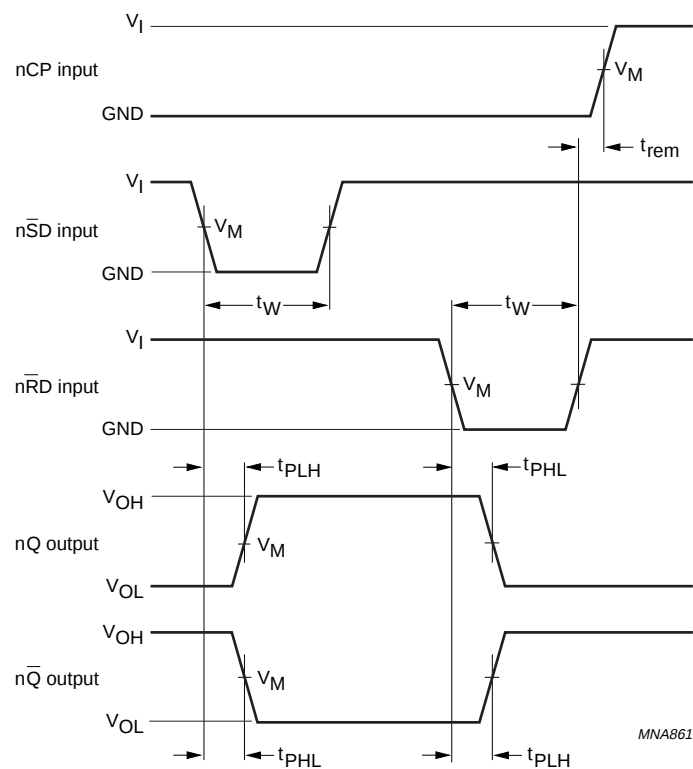

$V_M = 1.5 \text{ V}$ at $V_{CC} \geq 2.7 \text{ V}$.


$V_M = 0.5V_{CC}$ at $V_{CC} < 2.7 \text{ V}$.

V_{OL} and V_{OH} are typical output voltage drop that occur with the output load.

Fig.7 Set ($\overline{nSD}$) and reset ($\overline{nRD}$) input to output (nQ and $\overline{nQ}$) propagation delays, the set and reset pulse widths and the $\overline{nRD}$ and $\overline{nSD}$ to nCP removal time.

Dual $\overline{\text{JK}}$ flip-flop with set and reset;
positive-edge trigger

74LVC109

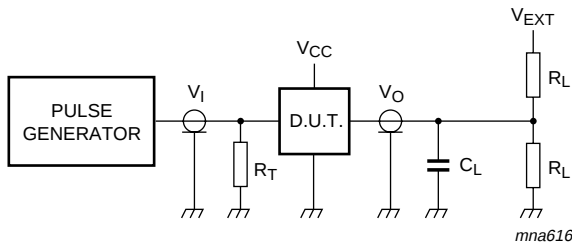

V _{CC}	V _I	C _L	R _L	V _{EXT}
				t _{PLH} /t _{PHL}
1.2 V	V _{CC}	50 pF	500 Ω ⁽¹⁾	open
2.7 V	2.7 V	50 pF	500 Ω	open
3.0 to 3.6 V	2.7 V	50 pF	500 Ω	open

Note

1. The circuit performs better when R_L = 1000 Ω.

Definitions for test circuit:

R_L = Load resistor.

C_L = Load capacitance including jig and probe capacitance.

R_T = Termination resistance should be equal to Z_o of the pulse generator.

Fig.8 Load circuitry for switching times.


Dual $\overline{JK}$ flip-flop with set and reset;
positive-edge trigger

74LVC109

PACKAGE OUTLINES

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

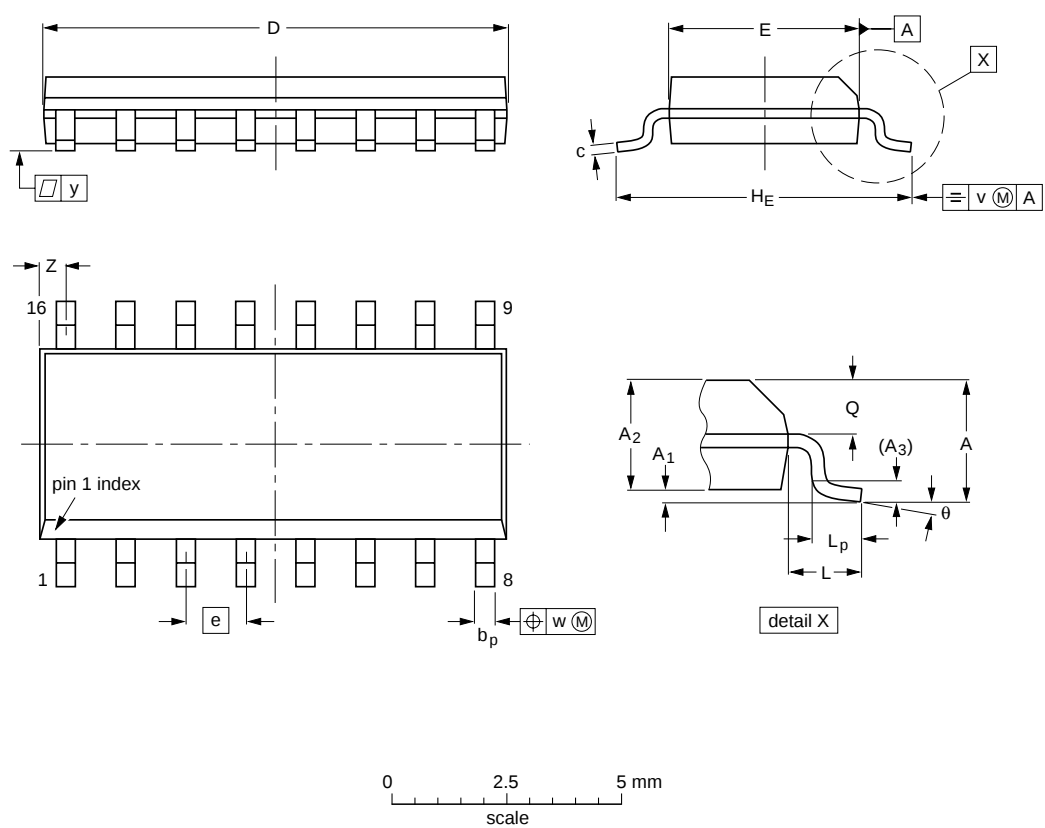

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	z ⁽¹⁾	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8° 0°
inches	0.069	0.010 0.004	0.057 0.049	0.01	0.019 0.014	0.0100 0.0075	0.39 0.38	0.16 0.15	0.05	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

Note
1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT109-1	076E07	MS-012				99-12-27 03-02-19

Dual JK flip-flop with set and reset;
positive-edge trigger

74LVC109

SSOP16: plastic shrink small outline package; 16 leads; body width 5.3 mm

SOT338-1

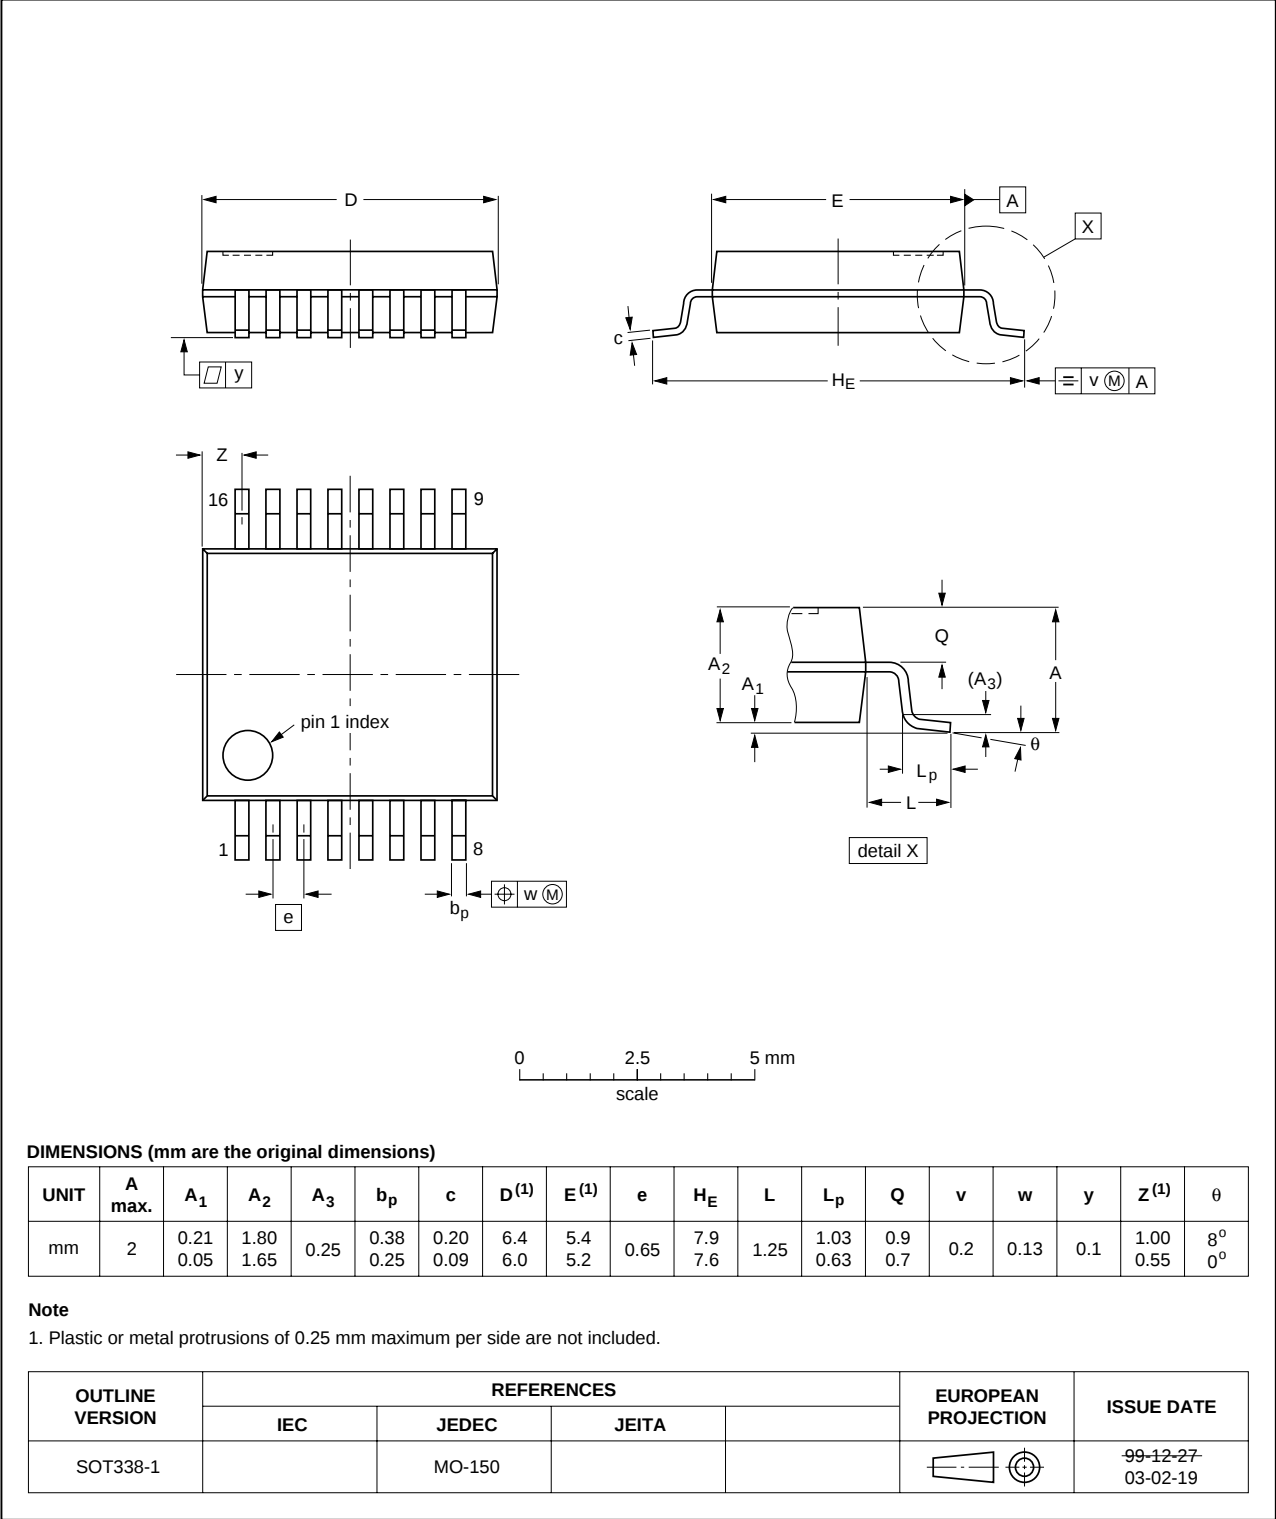


Dual JK flip-flop with set and reset;
positive-edge trigger

74LVC109

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm

SOT403-1

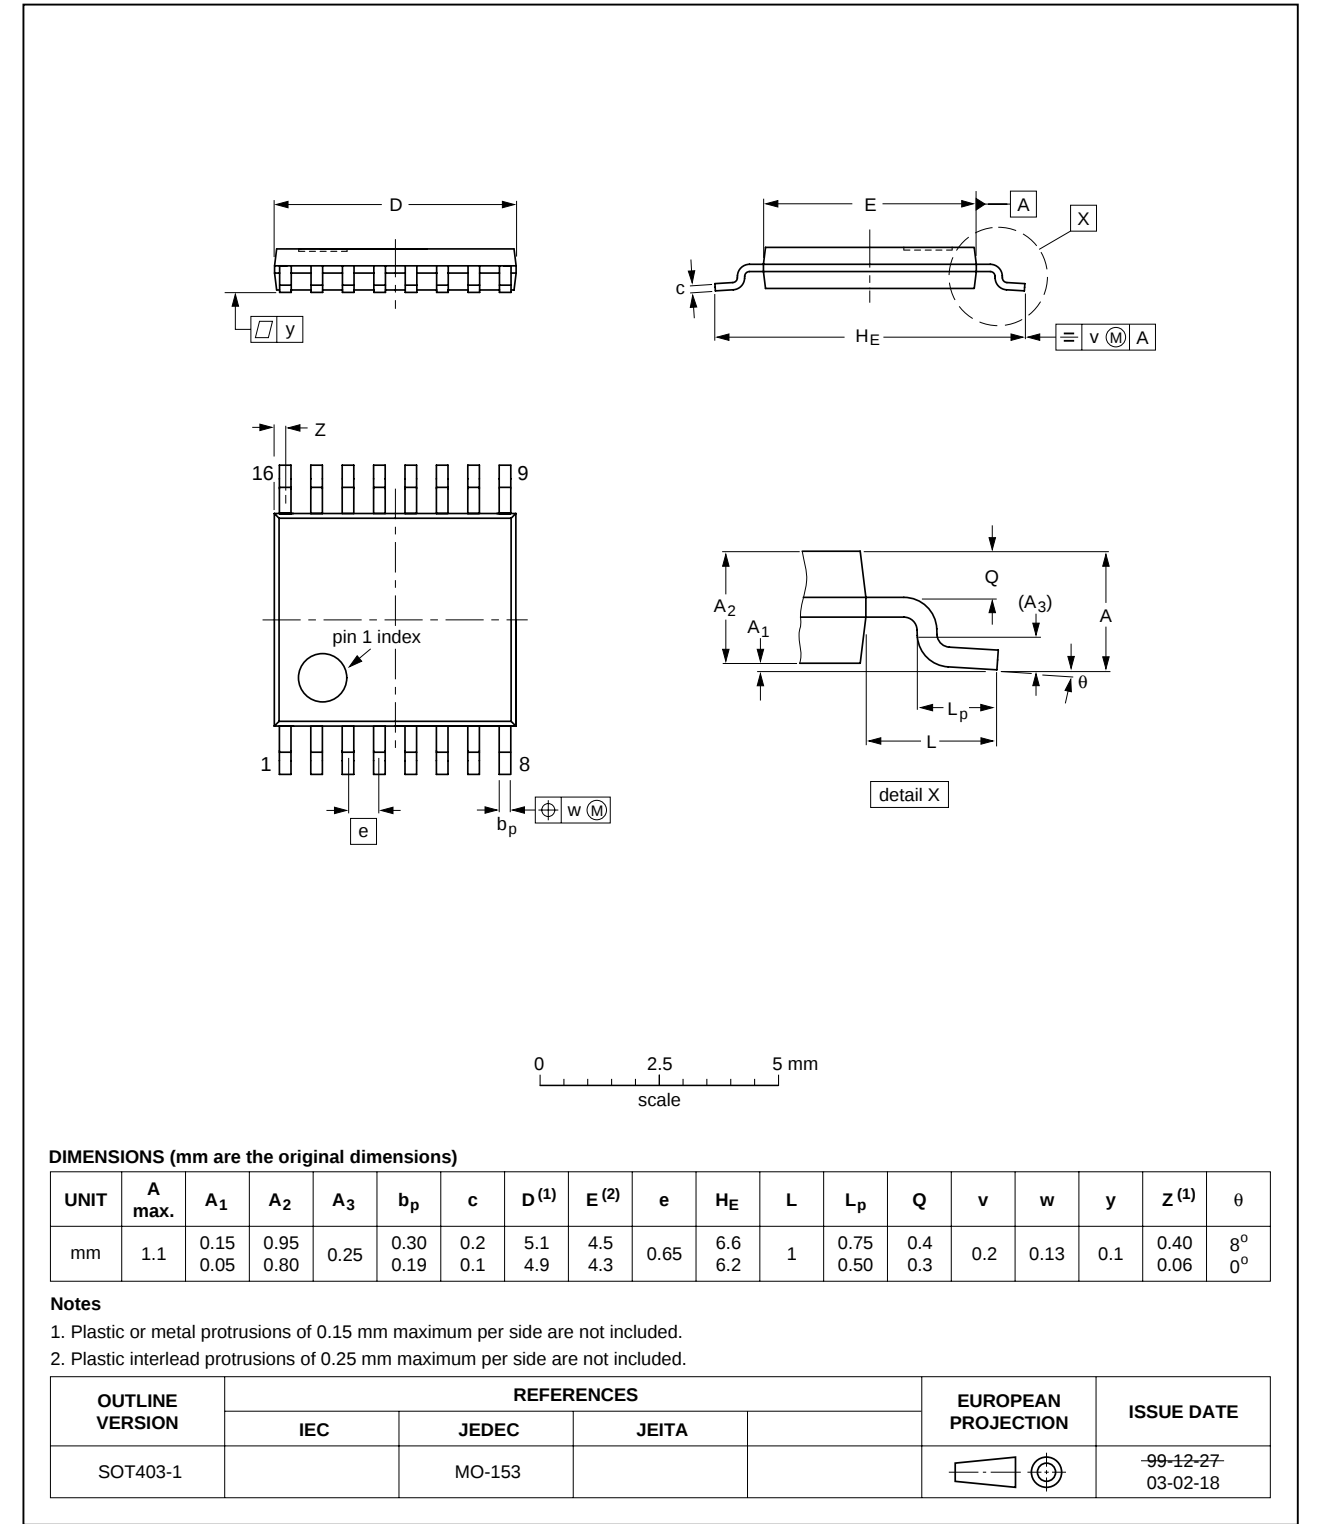

Dual JK flip-flop with set and reset; positive-edge trigger

74LVC109

DATA SHEET STATUS

LEVEL	DATA SHEET STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾⁽³⁾	DEFINITION
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.
3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors – a worldwide company

Contact information

For additional information please visit <http://www.semiconductors.philips.com>. Fax: **+31 40 27 24825**

For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2004

SCA76

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R20/04/pp18

Date of release: 2004 Mar 18

Document order number: 9397 750 10498

Let's make things better.

**Philips
Semiconductors**



PHILIPS