

## Features

- Precision Monitoring of +2.5V, +3V, +3.3V, and +5V Power-Supply Voltages
- Fully Specified Over Temperature
- Available in three Output Configurations
- Push-Pull **RESET** Low Output (AP1701/3)
- Push-Pull **RESET** High Output (AP1702/4)
- 200ms Min. Power-On Reset Pulse Width
- 20µA Supply Current (Typ.)
- Guaranteed Reset Valid to  $V_{CC} = +1V$
- Power Supply Transient Immunity
- No External Components
- Green Packages: SC59-3L and SOT23
- Lead Free Finish / RoHS Compliant (Note 1)

## General Description


The AP1701/2/3/4 are used for microprocessor (µP) supervisory circuits to monitor the power supplies in µP and digital systems. They provide excellent circuit reliability and low cost by eliminating external components and adjustments when used with +5V, +3.3V, +3.0V powered circuits.

These circuits perform a single function: they assert a reset signal whenever the  $V_{CC}$  supply voltage declines below a preset threshold, keeping it asserted for at least 240ms after  $V_{CC}$  has risen above the reset threshold. Reset thresholds suitable for operation with a variety of supply voltages are available. The AP1701/2/3/4 have push pull outputs. The AP1701/3 have an active low **RESET** output, while the AP1702/4 has an active high **RESET** output. The reset comparator is designed to ignore fast transients on  $V_{CC}$ , and the outputs are guaranteed to be in the correct logic state for  $V_{CC}$  down to 1V. Low supply current makes the AP1701/2/3/4 ideal for use in portable equipment. The AP1701/2/3/4 is available in a 3-pin SC59 package.

## Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical µP and µC Power Monitoring
- Portable/Battery Powered Equipment
- Automotive

## Ordering Information

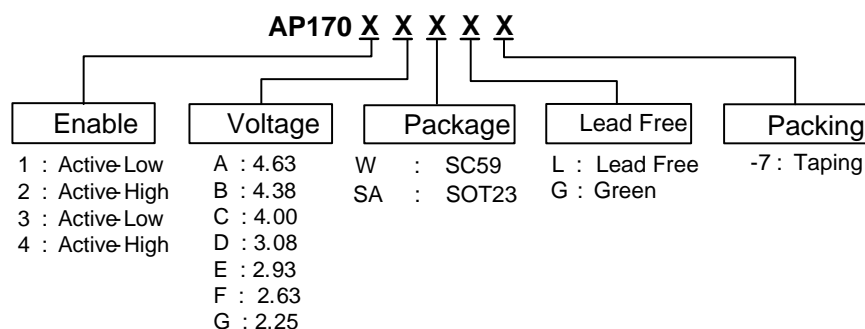


Notes: 1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.

| Device    | Package Code | Packaging (Note 2) | 7" Tape and Reel |                    |
|-----------|--------------|--------------------|------------------|--------------------|
|           |              |                    | Quantity         | Part Number Suffix |
| AP170XXW  | W            | SC59               | 3000/Tape & Reel | -7                 |
| AP170XXSA | SA           | SOT23              | 3000/Tape & Reel | -7                 |

Notes: 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

## Pin Assignments

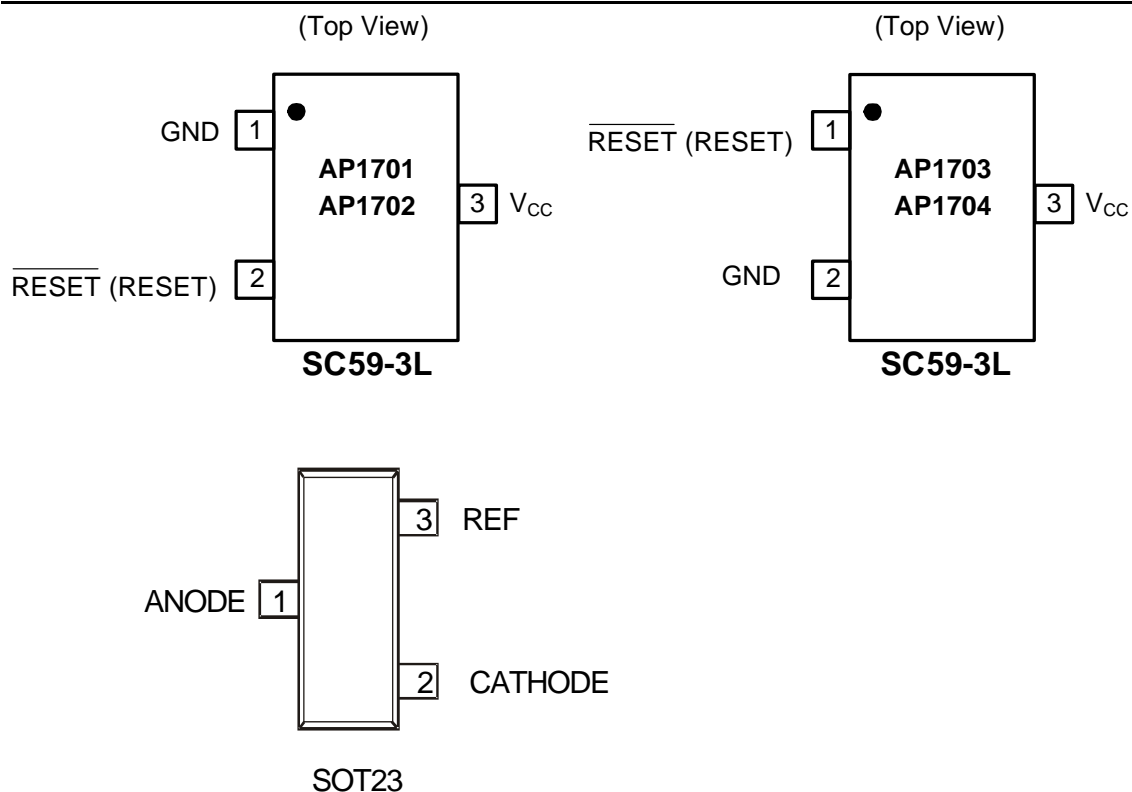

## Pin Descriptions

| Name                              | Description  |
|-----------------------------------|--|
| GND                               | Ground   |
| $\overline{\text{RESET}}$ (RESET) | Reset Output Pin<br>L: for AP1701/3<br>H: for AP1702/4 |
| $V_{CC}$                          | Operating Voltage Input                                |


## Absolute Maximum Ratings

| Symbol      | Parameter  | Rating                     | Unit             |
|-------------|--|----------------------------|------------------|
| $V_{CC}$    | Terminal Voltage (with respect to GND)   | -0.3 to +6.0               | V                |
| $V_{RESET}$ | RESET, $\overline{RESET}$ (push-pull)  | -0.3 to ( $V_{CC} + 0.3$ ) | V                |
| $I_{CC}$    | Input Current, $V_{CC}$  | 20                         | mA               |
| $I_O$       | Output Current, RESET, $\overline{RESET}$  | 20                         | mA               |
| $P_D$       | Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ ),<br>de-rate 4mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$ | 320                        | mW               |
| $T_{OP}$    | Operating Junction Temperature Range   | -40 to +105                | $^\circ\text{C}$ |
| $T_{ST}$    | Storage Temperature Range  | -65 to +150                | $^\circ\text{C}$ |

## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ )

| Symbol      | Parameter                                   | Conditions  | Min.           | Typ. | Max. | Unit                  |
|-------------|---|---|----------------|------|------|-----------------------|
| $V_{CC}$    | $V_{CC}$ Range                              | $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$                                      | 1.0            |      | 5.5  | V                     |
| $I_{CC}$    | Supply Current                              | $V_{TH} + 1.0\text{V}$  |                | 20   | 30   | $\mu\text{A}$         |
| $V_{TH}$    | Reset Threshold<br>$T_A = 25^\circ\text{C}$ | AP1701/2/3/4A   | 4.54           | 4.63 | 4.72 | V                     |
|             |   | AP1701/2/3/4B   | 4.29           | 4.38 | 4.47 |                       |
|             |   | AP1701/2/3/4C   | 3.92           | 4.00 | 4.08 |                       |
|             |   | AP1701/2/3/4D   | 3.02           | 3.08 | 3.14 |                       |
|             |   | AP1701/2/3/4E   | 2.87           | 2.93 | 2.99 |                       |
|             |   | AP1701/2/3/4F   | 2.57           | 2.63 | 2.68 |                       |
|             |   | AP1701/2/3/4G   | 2.20           | 2.25 | 2.30 |                       |
|             | Reset Threshold<br>Tempco                   |   |                | 30   |      | ppm/ $^\circ\text{C}$ |
| $T_S$       | Set-up Time                                 | $V_{CC} = 0$ to ( $V_{TH} - 100\text{mV}$ )   | 100            |      |      | $\mu\text{s}$         |
| $T_{DELAY}$ | Reset Active<br>Timeout Period              | $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$                                      | 100            | 240  | 600  | ms                    |
| $V_{OL}$    | $\overline{RESET}$ Output<br>Voltage Low    | $V_{CC} = V_{TH} \text{ min, } I_{SINK} = 1.2\text{mA, AP1701/3}$                   |                |      | 0.3  | V                     |
|             |   | $V_{CC} = V_{TH} \text{ min, } I_{SINK} = 3.2\text{mA}$                             |                |      | 0.4  |                       |
|             |   | $V_{CC} > 1.0\text{V, } I_{SINK} = 50\mu\text{A}$                                   |                |      | 0.3  |                       |
| $V_{OH}$    | $\overline{RESET}$ Output<br>Voltage-High   | $V_{CC} > V_{TH} \text{ max, } I_{SOURCE} = 500\mu\text{A, AP1701/3}$               | $0.8V_{CC}$    |      |      | V                     |
|             |   | $V_{CC} > V_{TH} \text{ max, } I_{SOURCE} = 800\mu\text{A}$                         | $V_{CC} - 1.5$ |      |      |                       |
| $V_{OL}$    | RESET Output<br>Voltage-Low                 | $V_{CC} = V_{TH} \text{ max, } I_{SINK} = 1.2\text{mA, AP1702/4}$                   |                |      | 0.3  | V                     |
|             |   | $V_{CC} = V_{TH} \text{ max, } I_{SINK} = 3.2\text{mA}$                             |                |      | 0.4  |                       |
| $V_{OH}$    | RESET Output<br>Voltage-High                | $1.8\text{V} < V_{CC} < V_{TH} \text{ min, } I_{SOURCE} = 150\mu\text{A, AP1702/4}$ | $0.8 V_{CC}$   |      |      | V                     |

## Typical Application Circuit

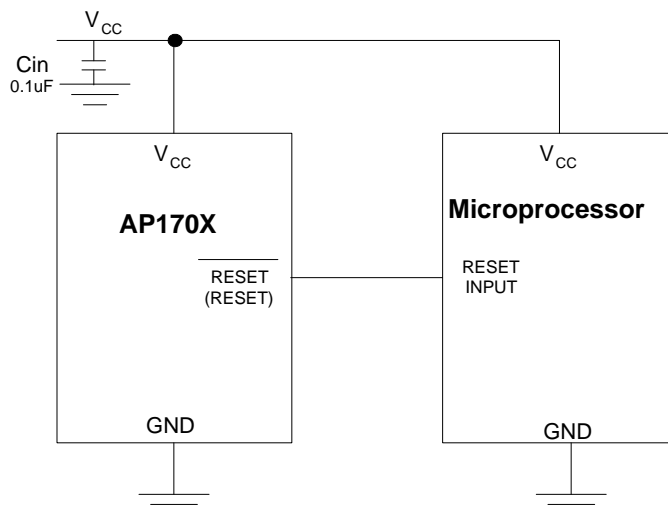

## Function Description

A microprocessor's ( $\mu P$ 's) reset input starts the  $\mu P$  in a known state. The AP1701/2/3/4 assert reset to prevent code-execution errors during power-up, power-down, or brownout conditions. They assert a reset signal whenever the  $V_{CC}$  supply voltage declines below a preset threshold, keeping it asserted for at least 240ms after  $V_{CC}$  has risen above the reset threshold. The AP1701/2/3/4 have a push-pull output stage.

### Applications Information

#### Negative-Going $V_{CC}$ Transients

In addition to issuing a reset to the  $\mu P$  during power-up, power-down, and brownout conditions, the AP1701/2/3/4 are relatively immune to short-duration negative-going  $V_{CC}$  transients (glitches).

The AP1701/2/3/4 do not generate a reset pulse. The graph was generated using a negative going pulse applied to  $V_{CC}$ , starting 0.5V above the actual reset threshold and ending below it by the magnitude indicated (reset comparator overdrive). The graph indicates the maximum pulse width a negative going  $V_{CC}$  transient can have without causing a reset pulse. As the magnitude of the transient increases (goes farther below the reset threshold), the maximum allowable pulse width decreases. Typically, a  $V_{CC}$  transient that goes 100mV below the reset threshold and lasts 100 $\mu s$  or less will not cause a reset pulse. A 0.1 $\mu F$  bypass capacitor mounted as close as possible to the  $V_{CC}$  pin provides additional transient immunity.

#### Ensuring a Valid Reset Output Down to $V_{CC} = 0$

$\overline{RESET}$  is guaranteed to be a logic low for  $V_{CC} > 1V$ . Once  $V_{CC}$  exceeds the reset threshold, an internal timer keeps  $\overline{RESET}$  low for the reset timeout period; after this interval,  $\overline{RESET}$  goes high. If a brownout condition occurs ( $V_{CC}$  dips  $\overline{RESET}$

below the reset threshold),  $\overline{RESET}$  goes low. Any time  $V_{CC}$  goes below the reset threshold, the internal timer resets to zero, and  $\overline{RESET}$  goes low. The internal timer starts after  $V_{CC}$  returns above the reset threshold, and  $\overline{RESET}$  remains low for the reset timeout period.


When  $V_{CC}$  falls below 1V, the AP1701/3  $\overline{RESET}$  output no longer sinks current—it becomes an open circuit. Therefore, high-impedance CMOS logic inputs connected to  $\overline{RESET}$  can drift to undetermined voltages.

This presents no problem in most applications since most  $\mu P$  and other circuitry is inoperative with  $V_{CC}$  below 1V. However, in applications where  $\overline{RESET}$  must be valid down to 0V, adding a pull down resistor to  $\overline{RESET}$  causes any stray leakage currents to flow to ground, holding  $\overline{RESET}$  low.  $R1$ 's value is not critical; 100k are large enough not to load  $\overline{RESET}$  and small enough to pull  $\overline{RESET}$  to ground. For the AP1702/4 if  $\overline{RESET}$  is required to remain valid for  $V_{CC} < 1V$ .



#### Benefits of Highly Accurate Reset Threshold

Most  $\mu P$  supervisor ICs has reset threshold voltages between 5% and 10% below the value of nominal supply voltages. This ensures a reset will not occur within 5% of the nominal supply, but will occur when the supply is 10% below nominal. When using ICs rated at only the nominal supply  $\pm 5\%$ , this leaves a zone of uncertainty where the supply is between 5% and 10% low, and where the reset may or may not be asserted.


## Block Diagram

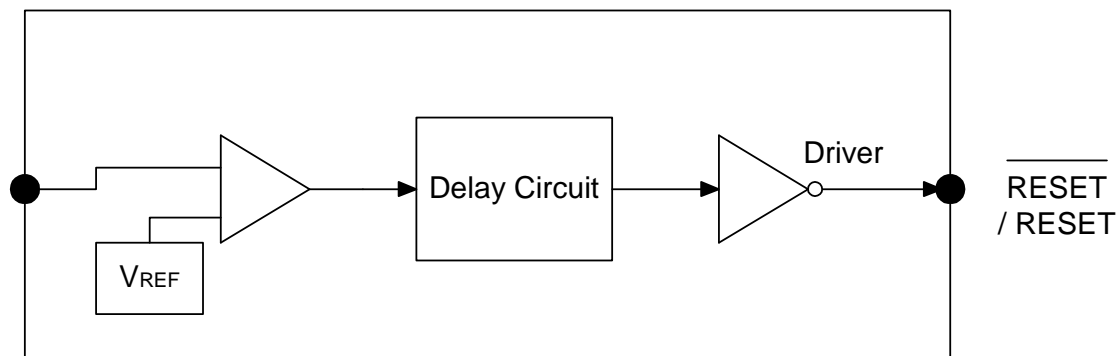


## Performance Characteristics

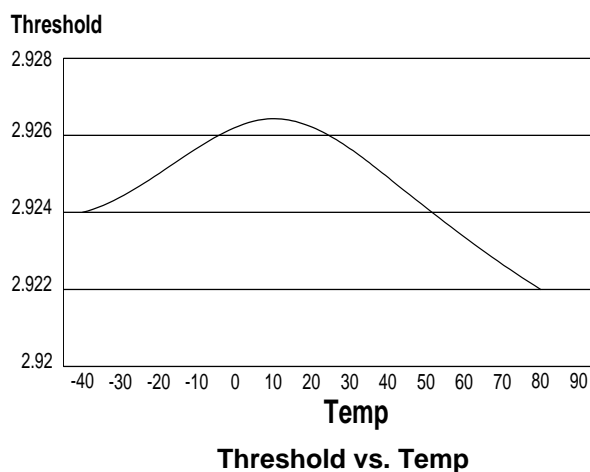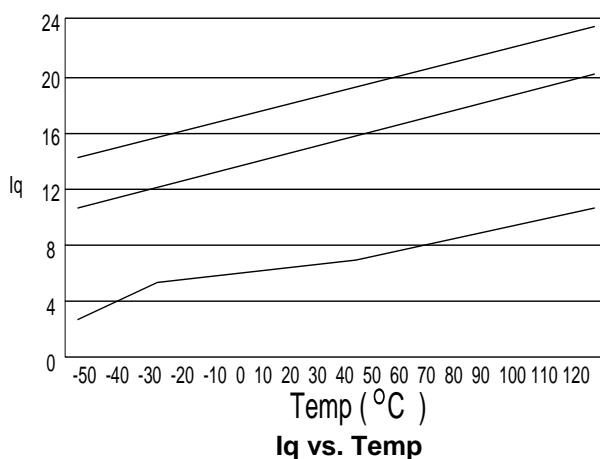

## Timing Diagram

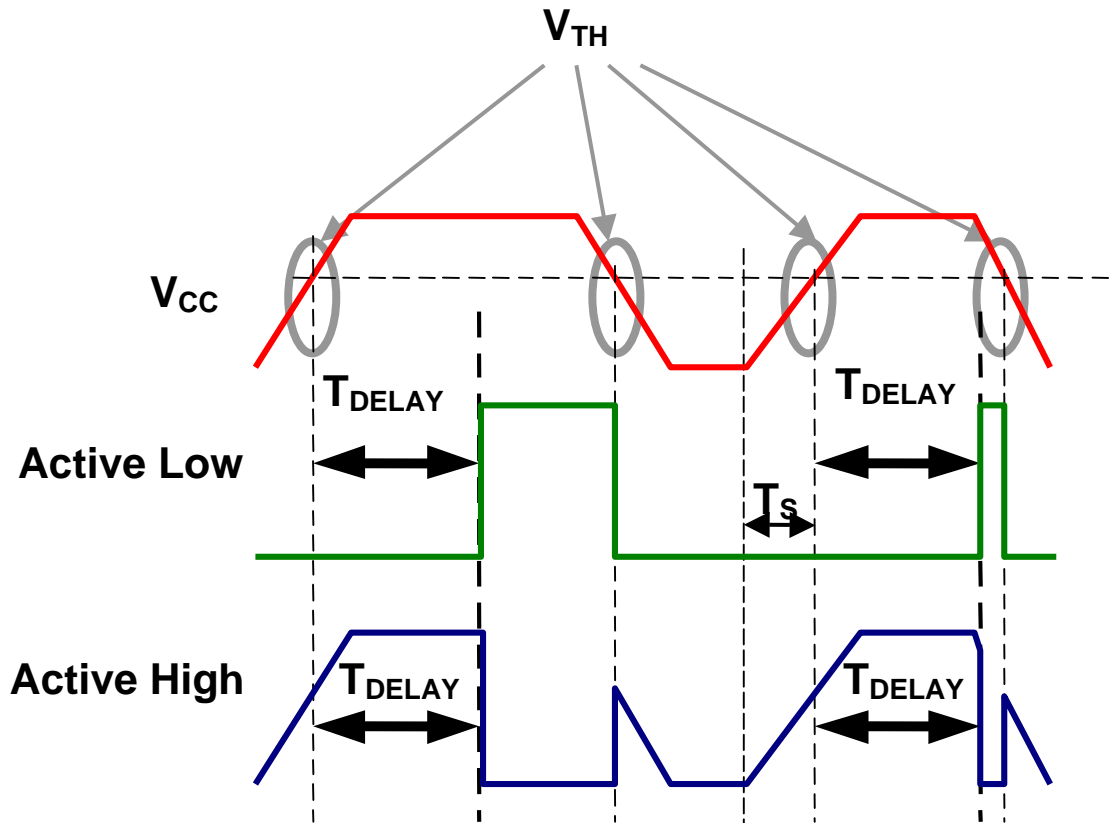


Gilch Immunity

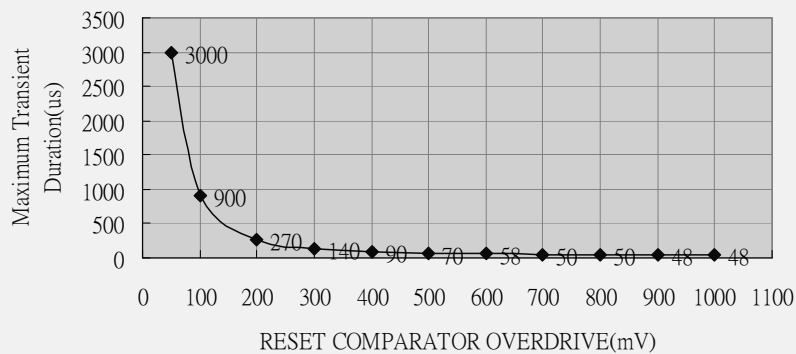


## Marking Information

### (1) SC59-3L

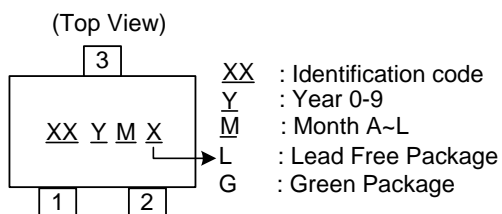

### (2) SOT23

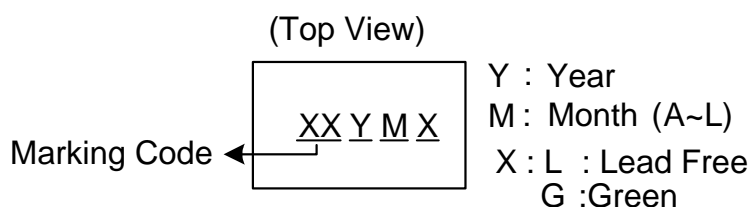

## Marking Information (Continued)


| Device    | Package (Note 3) | Identification Code |
|-----------|------------------|---------------------|
| AP1701ASA | SOT23            |                     |
| AP1701BSA | SOT23            |                     |
| AP1701CSA | SOT23            |                     |
| AP1701DSA | SOT23            |                     |
| AP1701ESA | SOT23            |                     |
| AP1701FSA | SOT23            |                     |
| AP1701GSA | SOT23            |                     |
| AP1702ASA | SOT23            |                     |
| AP1702BSA | SOT23            |                     |
| AP1702CSA | SOT23            |                     |
| AP1702DSA | SOT23            |                     |
| AP1702ESA | SOT23            |                     |
| AP1702FSA | SOT23            |                     |
| AP1702GSA | SOT23            |                     |
| AP1703ASA | SOT23            |                     |
| AP1703BSA | SOT23            |                     |
| AP1703CSA | SOT23            |                     |
| AP1703DSA | SOT23            |                     |
| AP1703ESA | SOT23            |                     |
| AP1703FSA | SOT23            |                     |
| AP1703GSA | SOT23            |                     |
| AP1704ASA | SOT23            |                     |
| AP1704BSA | SOT23            |                     |
| AP1704CSA | SOT23            |                     |
| AP1704DSA | SOT23            |                     |
| AP1704ESA | SOT23            |                     |
| AP1704FSA | SOT23            |                     |
| AP1704GSA | SOT23            |                     |
| AP1701AW  | SC59             | EA                  |
| AP1701BW  | SC59             | EB                  |
| AP1701CW  | SC59             | EC                  |
| AP1701DW  | SC59             | ED                  |
| AP1701EW  | SC59             | EE                  |
| AP1701FW  | SC59             | EF                  |
| AP1701GW  | SC59             | W1                  |
| AP1702AW  | SC59             | E0                  |
| AP1702BW  | SC59             | E2                  |
| AP1702CW  | SC59             | E3                  |
| AP1702DW  | SC59             | E4                  |
| AP1702EW  | SC59             | E5                  |
| AP1702FW  | SC59             | E6                  |
| AP1702GW  | SC59             | W2                  |
| AP1703AW  | SC59             | EG                  |
| AP1703BW  | SC59             | EH                  |
| AP1703CW  | SC59             | EI                  |
| AP1703DW  | SC59             | EJ                  |
| AP1703EW  | SC59             | EK                  |
| AP1703FW  | SC59             | EL                  |
| AP1703GW  | SC59             | W3                  |
| AP1704AW  | SC59             | E7                  |
| AP1704BW  | SC59             | E8                  |
| AP1704CW  | SC59             | E9                  |
| AP1704DW  | SC59             | EM                  |
| AP1704EW  | SC59             | EN                  |
| AP1704FW  | SC59             | EP                  |
| AP1704GW  | SC59             | W4                  |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.




**Package Information** (All Dimensions in mm)

**(1) Package Type: SC59-3L**

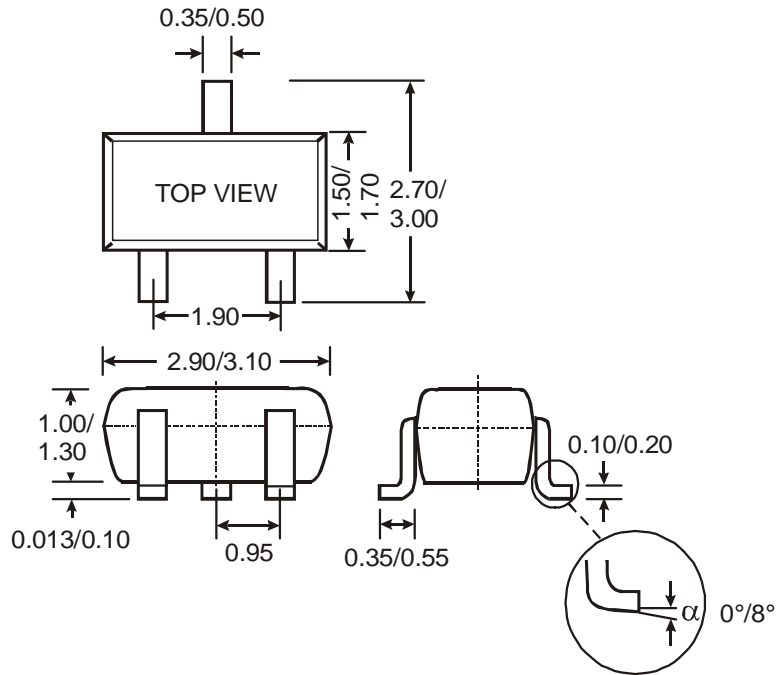

**(2) Package Type: SOT23**

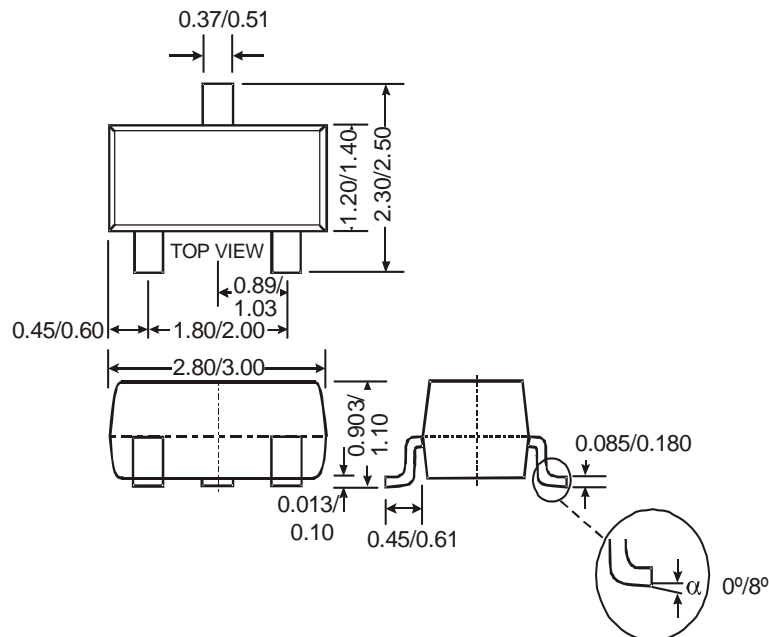

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.