


Features:

- Frequency Range: 27 – 33 GHz
- P1dB: +36 dBm
- IM3 Level: -38 dBc @Po=20dBm/tone
- Gain: 22 dB
- Vdd = 6V
- Idsq = 1500 to 2800mA
- Input and Output Fully Matched to 50 Ω

Applications:

- P2P Radio
- V-sat

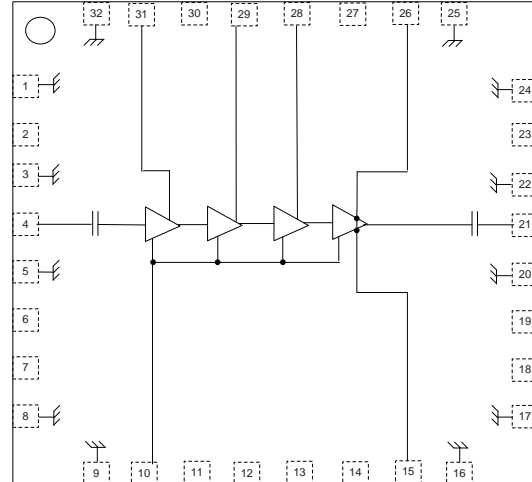

Functional Block Diagram

Description:

The MMIC is a high power amplifier MMIC in a surface mount package designed for use in transmitters that operate at frequencies between 27GHz and 33GHz. In the operational frequency band, it provides 36dBm of output power (P-1dB) and 22dB of small-signal gain.

Absolute Maximum Ratings: ($T_a = 25^\circ\text{C}$)*

| SYMBOL | PARAMETERS | UNITS | Min. | Max. |
|---------|---------------------------------|------------------|------|-------------|
| Vds | Drain-Source Voltage | V | | 6.5 |
| Vg | Gate-Source Voltage | V | -2.1 | 0 |
| Ig | First Gate Current | mA | -17 | 17 |
| Pd | Power Dissipation | W | | 24 |
| Pin max | RF Input Power | dBm | | 20 |
| Tch | Channel Temperature | $^\circ\text{C}$ | | +150 |
| Tstg | Storage Temperature | $^\circ\text{C}$ | | -55 to +150 |
| Tmax | Max. Assembly Temp (20 sec max) | $^\circ\text{C}$ | | +250 |


*Operation of this device above any one of these parameters may cause permanent damage.

Electrical Specifications: $V_{ds}=6V$, $V_{gs}=-0.85V$, $I_{dsq}=2200mA$, $T_a=25\text{ }^{\circ}C$ $Z_0=50\text{ ohm}$


| Parameter | Units | Typical Data |
|--------------------------------------|---------------|--------------|
| Frequency Range | GHz | 27-33 |
| Gain (Typ / Min) | dB | 22 / 20 |
| Gain Flatness (Typ / Max) | +/-dB | 3 / 4 |
| Input RL(Typ/Max) | dB | 10/8 |
| Output RL(Typ/Max) | dB | 10/8 |
| Output P1dB(Typ/Min) | dBm | 35.5/35 |
| Output P3dB(Typ/Min) | dBm | 36.5/36 |
| IM3 Level ⁽¹⁾ | dBc | -36 |
| Thermal Resistance | $^{\circ}C/W$ | 3.8 |
| Operating Current at P1dB(Typ / Max) | mA | 2500 / 3000 |

(1) Output IP3 is measured with two tones at output power of 20 dBm/tone separated by 20 MHz.


Typical RF Performance: $V_{ds}=6V$, $V_{gsq}=-0.85V$, $I_{dsq}=2200mA$, $Z_0=50\ \Omega$, $T_a=25\ ^\circ C$

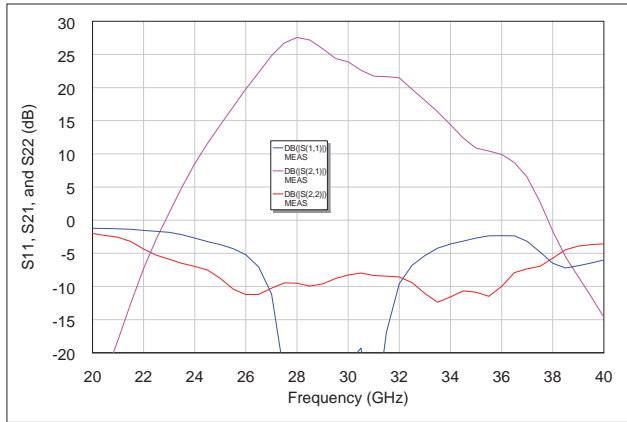


S11, S21, and S22 vs. Frequency

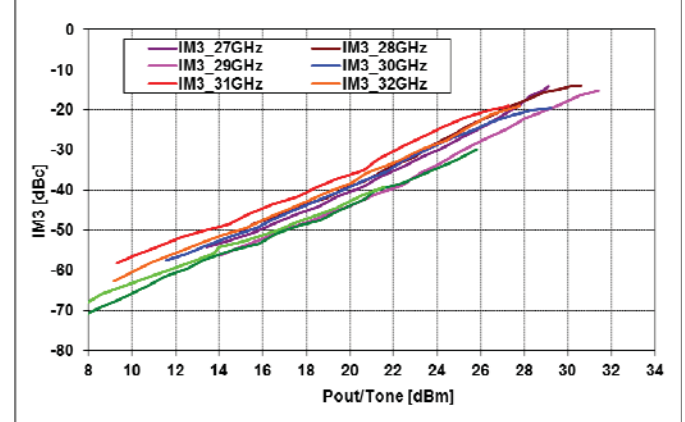

IM3 level [dBc] vs. Output power/tone [dBm]

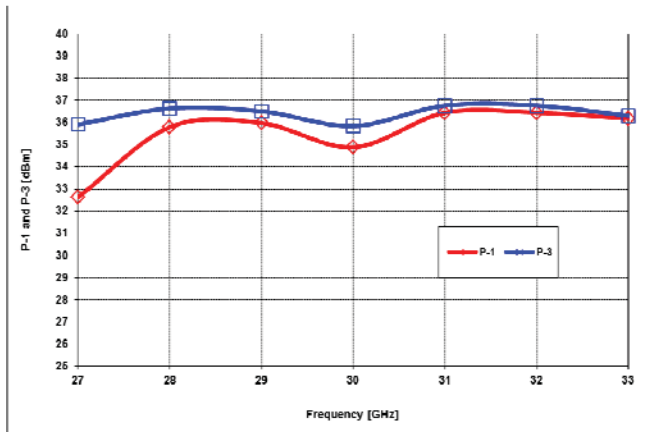


P-1 and P-3 vs. Frequency

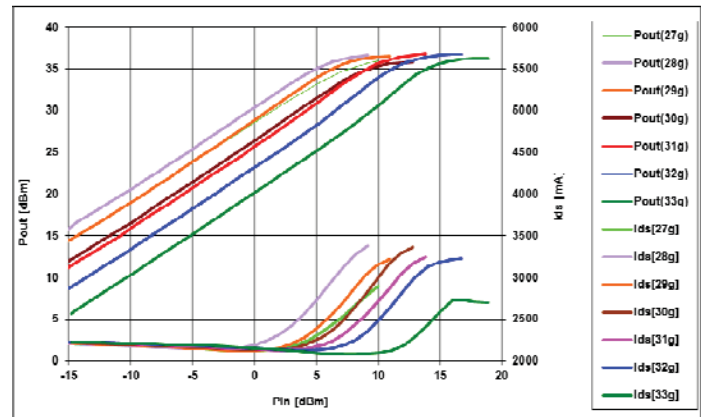


Po(dBm), and Ids(mA) vs. Pin(dBm)

Typical Bias dependent RF Performance:

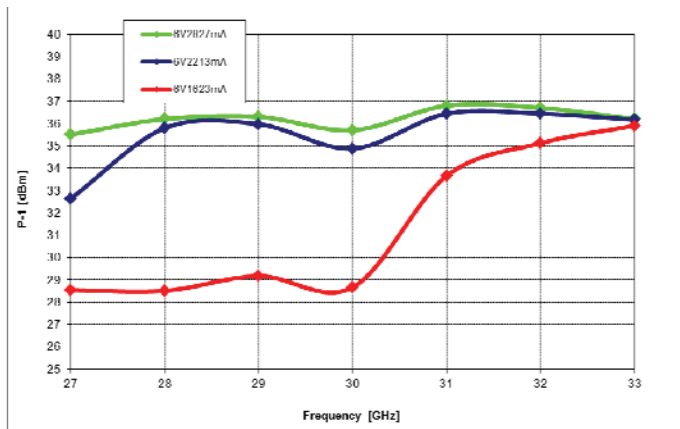


Bias dependent P1 vs. Frequency

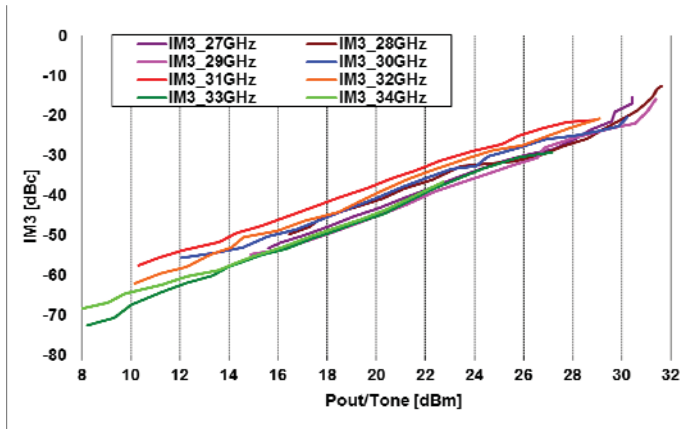


IM3 Level [dBc] vs. output power/tone [dBm]

@Vds=6V, Idsq=2.8A

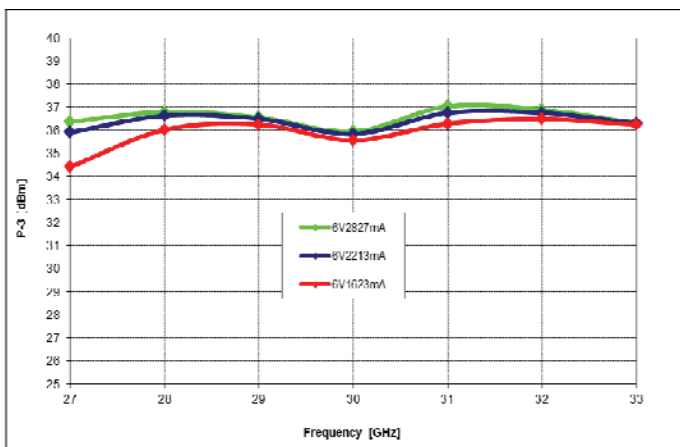

Bias dependent P-3 vs. Frequency

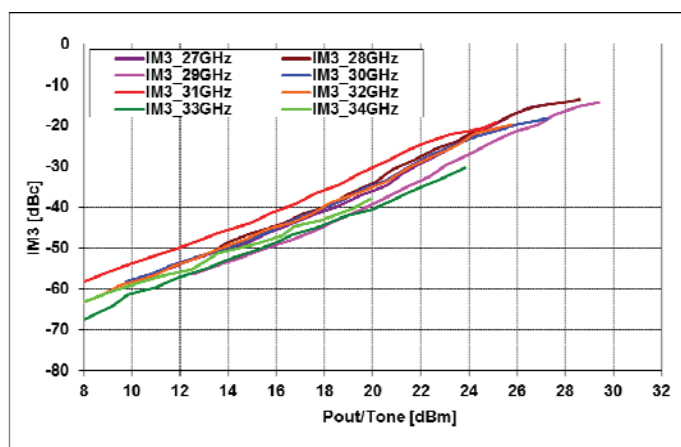

Pout[dBm], and Ids[mA] vs. Input power [dBm]

@Vds=6V, Idsq=1.5A

Applications

The **MMA-273336-M5** MMIC power amplifier is designed for use as a power stage amplifier in microwave transmitters. It is ideally suited for 27 to 33GHz band V-sat transmitter applications requiring excellent saturated output power performance. This amplifier is provided as a 5x5mm QFN package, and the packaged amplifier is fully compatible with industry standard high volume surface mount PCB assembly processes.


Biassing and Operation

The recommended bias conditions for best performance for the **MMA-273336-M5** are $V_{DD} = 6.0V$, $I_{dsq} = 2200mA$. Performance improvements are possible depending on applications. The drain bias voltage range is 5 to 6V and the quiescent drain current biasing range is 1500mA to 2800mA. A single DC gate supply connected to V_g will bias all the amplifier stages. Muting can be accomplished by setting V_g to the pinch-off voltage ($V_p = -2V$). The gate voltage (V_g) should be applied prior to the drain voltages (V_{d1} , V_{d2} , V_{d3}) during power up and removed after the drain voltages during power down. The RF input and output ports are DC decoupled internally. Typical DC supply connection with bi-passing capacitors for the **MMA-273336-M5** is shown in following pages.

Assembly Techniques


GaAs MMICs are ESD sensitive. ESD preventive measures must be employed in all aspects of storage, handling, and assembly. MMIC ESD precautions, handling considerations, die attach and bonding methods are critical factors in successful GaAs MMIC performance and reliability.

Package Pin-out:

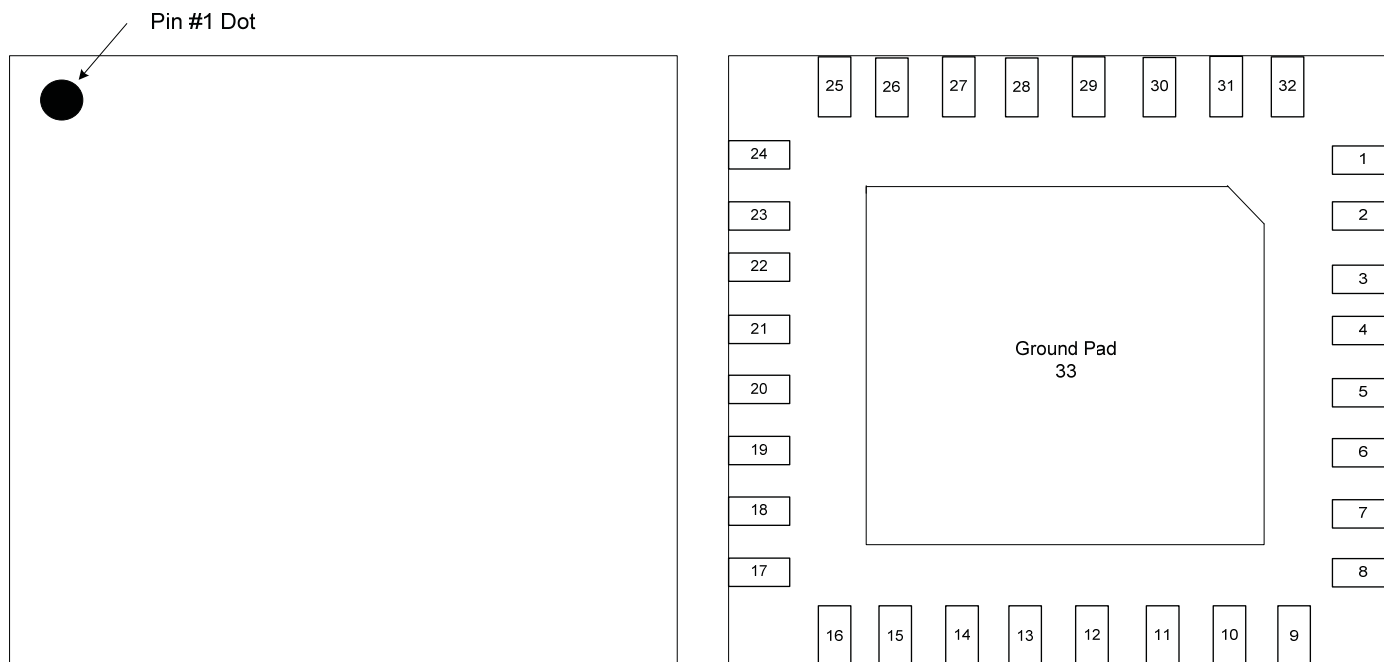


| Pin | Description |
|---|-------------|
| 4 | RF Input |
| 21 | RF Output |
| 10 | Vg |
| 31 | Vd1 |
| 29 | Vd2 |
| 28 | Vd3 |
| 15, 26 | Vd4 |
| 1, 3, 5, 8, 9, 16, 17, 20, 22, 24, 25, 32, 33 | Ground |
| 2, 6, 7, 11, 12, 13, 14, 18, 19, 23, 27, 30 | N/C |

Mechanical Information:

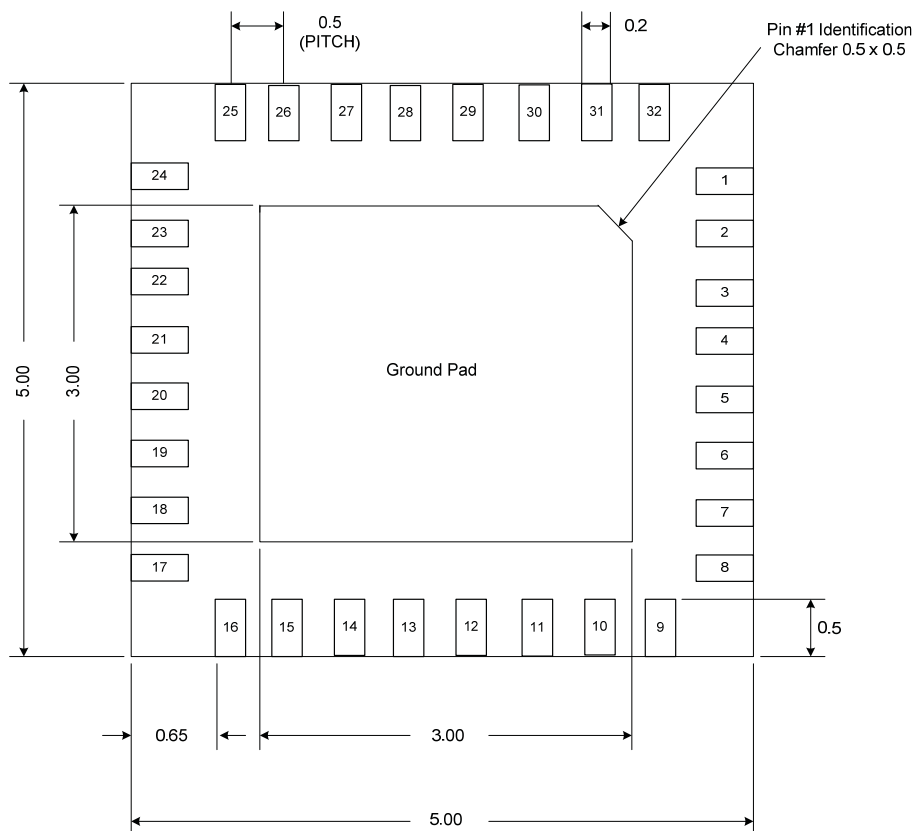


BOTTOM VIEW



SIDE VIEW

The units are in [mm].


Application Circuit:

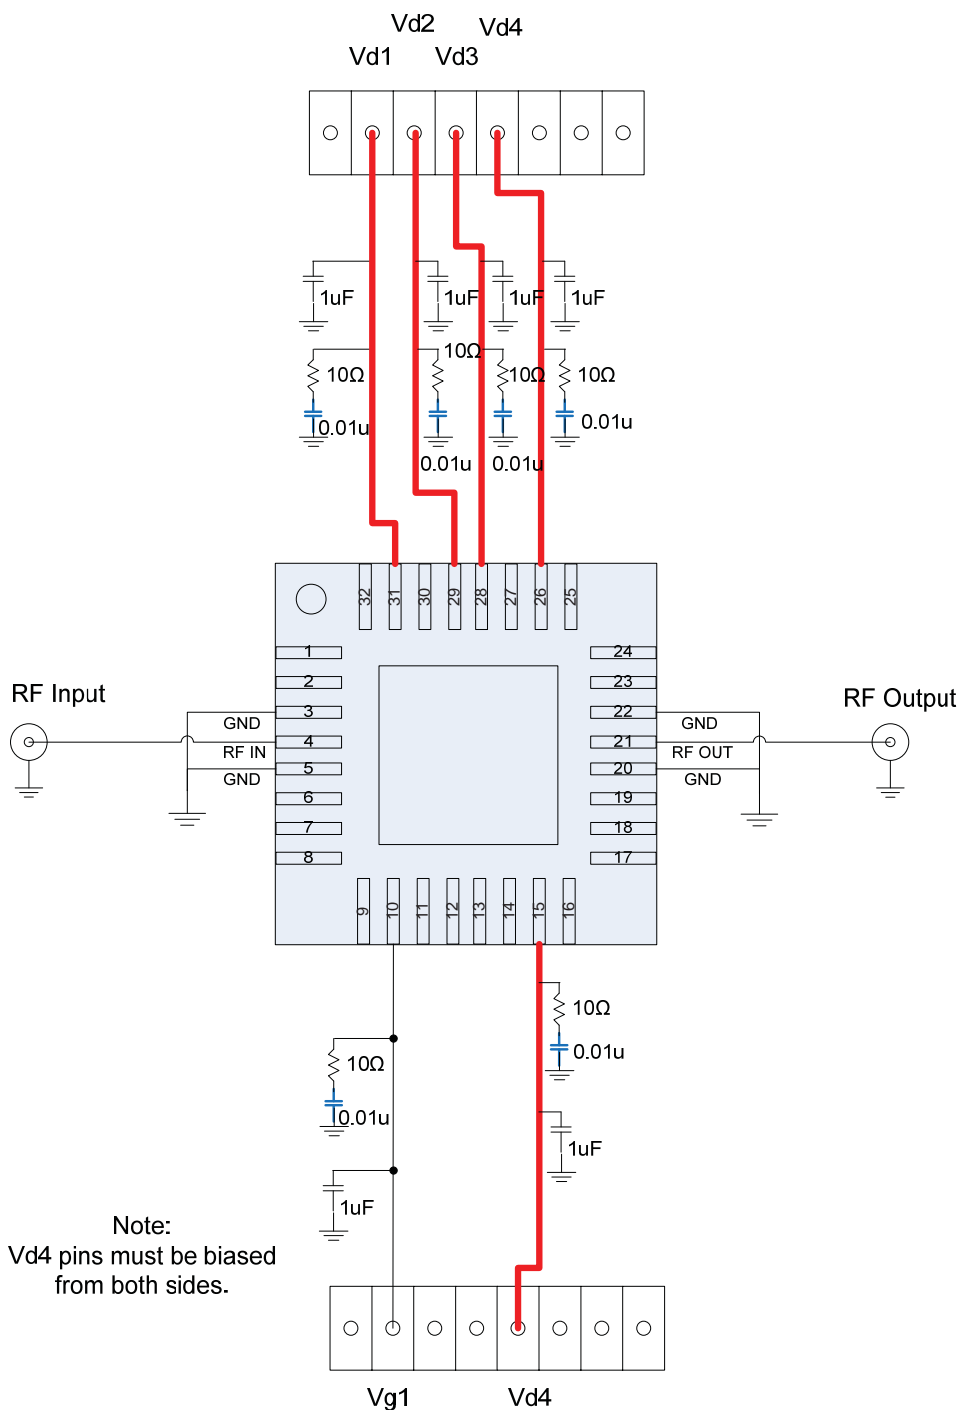

Recommended Application Board Design:

Board Material is 10mil (Dielectric) thickness Rogers 4350B with 0.5oz copper clads.

Board is soldered on a gold plated solid copper block and adequate heat-sinking is required for 16.8W total power dissipation.

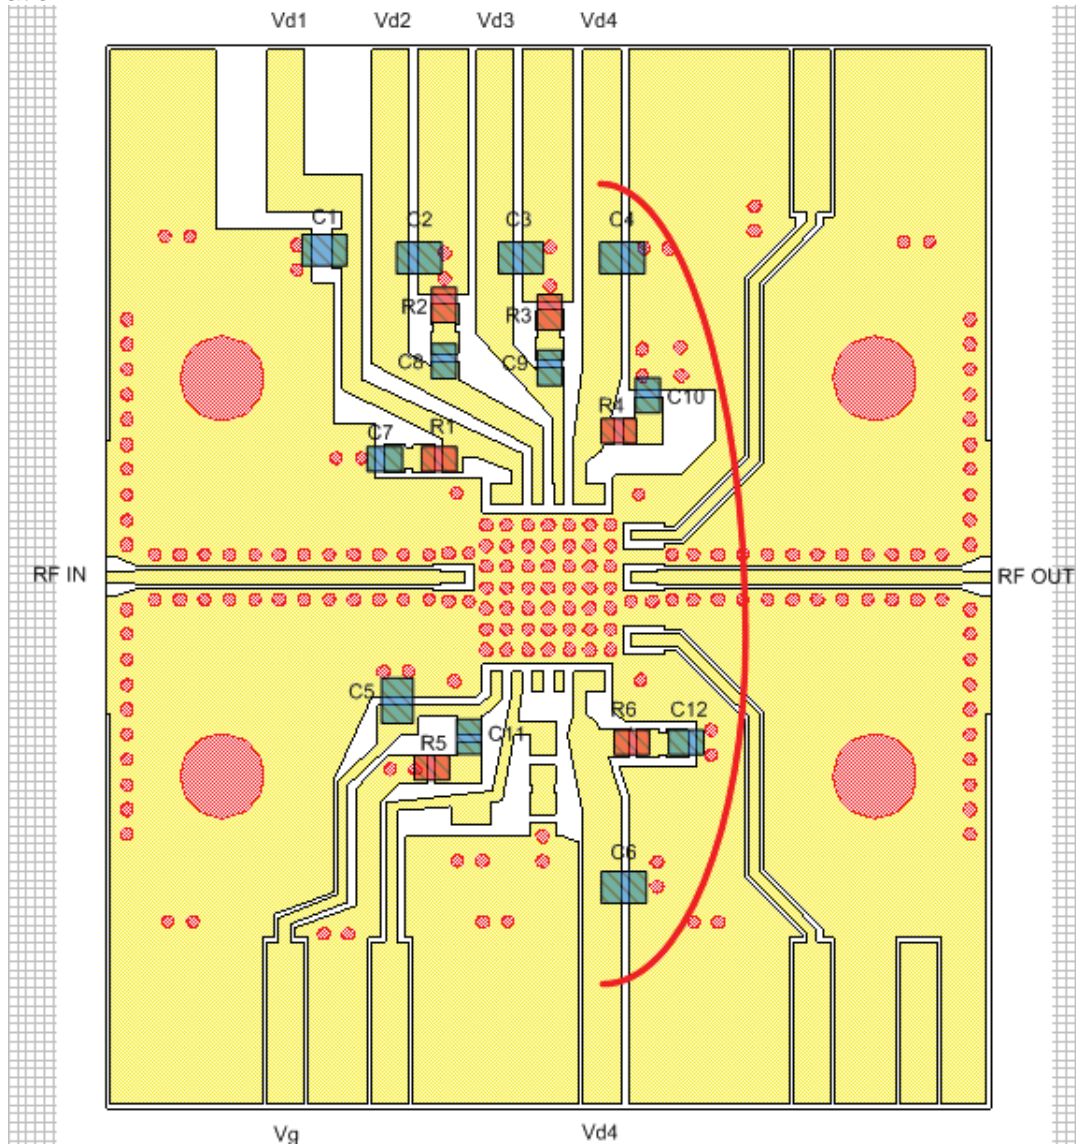

| Part | Description |
|---------------------------|-------------------------|
| C1, C2, C3, C4, C5, C6 | 1uF capacitor (0603) |
| C7, C8, C9, C10, C11, C12 | 0.01uF Capacitor (0402) |
| R1, R2, R3, R4, R5, R6 | 10Ω Resistor (0402) |

Recommended Application Board Design:

Board Material is 10mil (Dielectric) thickness Rogers 4350B with 0.5oz copper clads. The board material and mounting pattern, as defined in the data sheet, optimizes RF performance and is strongly recommended. An electronic drawing of the land pattern is available upon request from MwT Sales & Application Engineering.

