

NON-ISOLATED DC/DC CONVERTERS

12V Input 0.9V-3.63V/7A Output



X7AH-07A Series PRELIMINARY

- Non-Isolated
- High Efficiency
- High Power Density
- Excellent Thermal Performance
- Low Cost
- Remote On/Off
- Input Under Voltage Lockout
- OCP/SCP
- Wide Range Trim

Description

The Bel X7AH-07AXX0 modules are a series of non-isolated, step down DC/DC power converters that operate from a nominal 12V source. These converters are available in a range of output voltages from 0.9V to 3.3V. It is packaged in a compact, overmolded package rated at 7A. Optional lead forming provides a vertical mount product for minimal footprint or a surface mount option for a very low profile. The output is closely regulated and the efficiency of 3.3V output is typically 88% at full load. Typical features include remote on/off, input under voltage lockout, over current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
3.3V	12V	7A	23.1W	88%	S7AH-07A330	V7AH-07A330
2.5V	12V	7A	17.5W	86%	S7AH-07A250	V7AH-07A250
1.8V	12V	7A	12.6W	83%	S7AH-07A180	V7AH-07A180
1.5V	12V	7A	10.5W	81%	S7AH-07A150	V7AH-07A150
1.2V	12V	7A	8.4W	78%	S7AH-07A120	V7AH-07A120
0.9V	12V	7A	6.3W	74%	S7AH-07A090	V7AH-07A090
0.9V - 3.63V	12V	7A	23.1W	88%	S7AH-07A1A0	V7AH-07A1A0

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	15V	
Output Enable Terminal Voltage	-0.3V	-	14V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-55°C	-	125°C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10V	-	14V	
Input Current (no load)	-	-	100mA	
Input Current (full load)				
Vo=3.3V	-	-	3.0A	
Vo=2.5V	-	-	2.6A	
Vo=1.8V	-	-	1.9A	
Vo=1.5V	-	-	1.6A	
Vo=1.2V	-	-	1.3A	
Vo=0.9V	-	-	1.0A	
Remote Off Input Current	-	3mA	10mA	

NON-ISOLATED DC/DC CONVERTERS

12V Input 0.9V-3.63V/7A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current (pk-pk)	-	180mA	-	Tested with simulated source impedance of 500nH, 5Hz to 20MHz and two 270uF/16V OSC capacitors with ESR=0.018 ohm max. at 100KHz
Input Reflected Ripple Current (RMS)	-	50mA	-	
I ² t Inrush Current Transient	-	TBD	-	
Turn on Voltage Threshold	-	9.5V	-	
Turn off Voltage Threshold	8.5V	9.0V	9.5V	

Output Specifications

Parameter		Min	Typ	Max	Notes
Output Voltage Set Point					Test conditions: Vin=12V, Io=50% full load
	Vo=3.3V	3.247V	3.3V	3.353V	
	Vo=2.5V	2.460V	2.5V	2.540V	
	Vo=1.8V	1.771V	1.8V	1.829V	
	Vo=1.5V	1.476V	1.5V	1.524V	
	Vo=1.2V	1.181V	1.2V	1.219V	
	Vo=0.9V	0.886V	0.9V	0.914V	
Line Regulation		-	±3mV	±6mV	
Load Regulation					
	Vo=3.3V	-	±5mV	±10mV	
	Vo=2.5V	-	±5mV	±10mV	
	Vo=1.8V	-	±5mV	±10mV	
	Vo=1.5V	-	±3mV	±6mV	
	Vo=1.2V	-	±3mV	±6mV	
	Vo=0.9V	-	±3mV	±6mV	
Regulation Over Temperature (-40°C to +85°C)		-	30mV	50mV	
Output Current		0A	-	7A	
Current Limit Threshold		10A	-	20A	
Short Circuit Surge Transient		-	TBD	-	
Ripple and Noise (RMS)					Test condition: 0-20MHz BW, with a 330uF/10V tan capacitor at the output.
	Vo=3.3V	-	20mV	50mV	
	Vo=2.5V	-	20mV	50mV	
	Vo=1.8V	-	15mV	40mV	
	Vo=1.5V	-	15mV	40mV	
	Vo=1.2V	-	15mV	30mV	
	Vo=0.9V	-	10mV	30mV	
Ripple and Noise (pk-pk)					
	Vo=3.3V	-	70mV	100mV	
	Vo=2.5V	-	70mV	100mV	
	Vo=1.8V	-	60mV	100mV	
	Vo=1.5V	-	60mV	80mV	
	Vo=1.2V	-	60mV	80mV	
	Vo=0.9V	-	50mV	70mV	
Turn on Time		-	8mS	20mS	
Overshoot at Turn on		-	0%	3%	
Output Capacitance		330uF	-	2800uF	
Transient Response					
50% ~ 100% Max Load	Overshoot	All	-	120mV	Test conditions: di/dt = 0.5A/uS; Vin = 12V; with a 330uF/10V Tan. Capacitor at the output.
	Settling Time		-	50uS	
100% ~ 50% Max Load	Overshoot		-	120mV	
	Settling Time		-	50uS	

Note: All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

12V Input 0.9V-3.63V/7A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12V, full load and Ta=25°C
Vo=3.3V	85%	88%	-	
Vo=2.5V	83%	86%	-	
Vo=1.8V	80%	83%	-	
Vo=1.5V	78%	81%	-	
Vo=1.2V	75%	78%	-	
Vo=0.9V	71%	74%	-	
Switching Frequency	250KHz	300KHz	350KHz	
Output Trim Range (wide trim)	-	-	403%Vo	Vo=0.9V
Output Trim Range (narrow trim)				
Vo=1.2V-3.3V	90%Vo	-	110%Vo	
Vo=0.9V	-	-	110%Vo	
MTBF	TBD			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25°C)
Dimensions (surface mount)				
Inches (L × W × H)	0.78 x 0.70 x 0.32			
Millimeters (L × W × H)	19.81 x 17.78 x 8.13			
Dimensions (vertical)				
Inches (L × W × H)	0.70 x 0.308 x 0.65			
Millimeters (L × W × H)	17.78 x 7.82 x 16.51			
Weight	-	5g	-	

Control Specifications


Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3V	-	1V	Remote on/off pin open, unit on.
Signal High (Unit On)	3.5V	-	14V	

Output Trim Equations

1) X7AH-07A1A0

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vnom) are shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{TrimUp} = \frac{6.062}{V_{adj} - V_{nom}} - 1.05$$

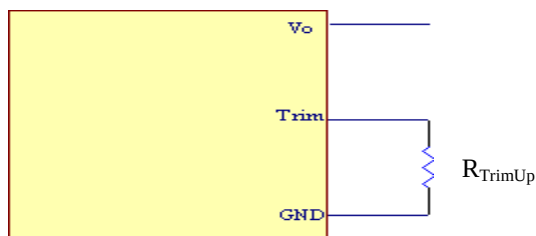

Note: Output voltage Vo=0.9V when RtrimUp is not connected.

NON-ISOLATED DC/DC CONVERTERS

12V Input 0.9V-3.63V/7A Output




Output Trim Equations (Continued)


2) X7AH-07AXX0

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) and the nominal output voltage of the converter (V_{nom}) are shown below. The Trim Down resistor should be connected between the Trim pin and V_{out} . The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{TrimDown} = \frac{A}{V_{nom} - V_{adj}} - B$$

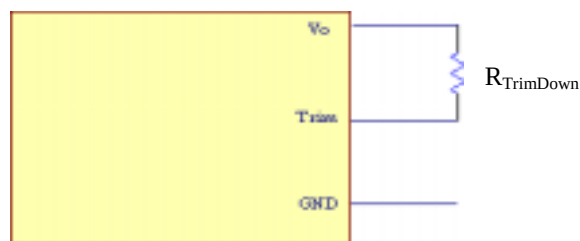



$$R_{TrimUp} = \frac{C}{V_{adj} - V_{nom}} - D$$

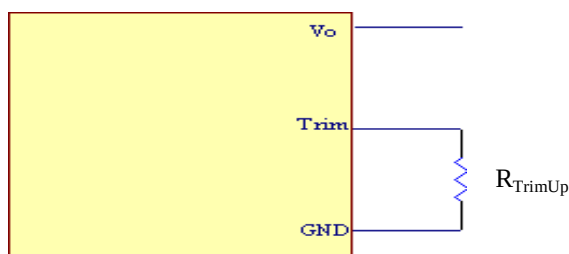

Vnom	A	B	C	D
3.3	22.56	18.66	6.06	10.00
2.5	15.62	18.66	6.06	10.00
1.8	9.55	18.66	6.06	10.00
1.5	6.95	18.66	6.06	10.00
1.2	4.35	18.66	6.06	10.00
0.9	N/A	N/A	6.06	1.05



NON-ISOLATED DC/DC CONVERTERS

12V Input 0.9V-3.63V/7A Output

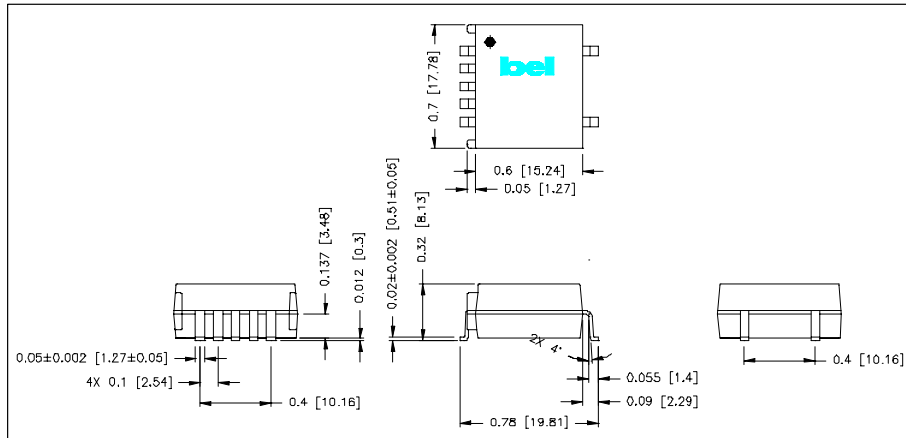

Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A

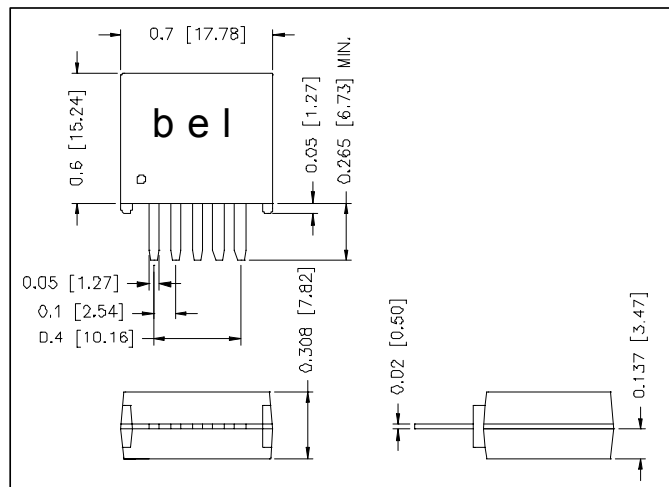

Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)

©2004 Bel Fuse Inc. Specifications subject to change without notice. 070204

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com