


3M™ Pak 50 Power Ground Socket

.050" Straight and Right Angle Socket, with Power Ground Pin

P50 Series

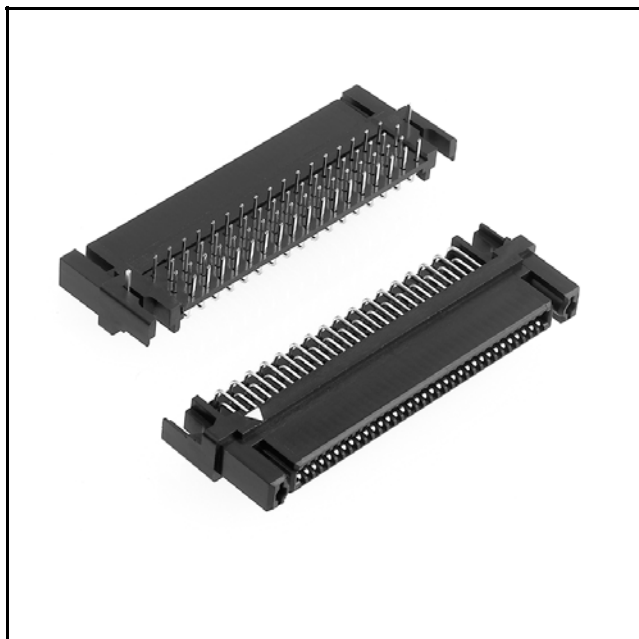

- Power/ground contacts enable separation of power and signals
- EMLB power/ground contacts control static discharge and allow "hot board" replacement
- 2 amp power/ground contact rating for high current applications maximizes signal contact utilization
- RoHS compliant* version (EA plating suffix) available

Date Modified: February 24, 2006

TS-2052-02
Sheet 1 of 3

Physical

Insulation

Material: Glass Filled Nylon

Flammability: UL 94V-0

Color: Black

Contact

Material: Phosphor Bronze

Plating:

Underplating Nickel

Wiping Area: 10 μ " [.25 μ m] Gold

Solder Tails: Tin Alloy over Nickel or gold flash (RoHS compliant) (See ordering information)

Retainer Clips: Tin-lead or Tin-copper (RoHS compliant)

Electrical

Current Rating: 0.5 A per Signal Contact, 2 A per Power Contact

Insulation Resistance: 10³ M Ω min. at 500V DC

Withstanding Voltage: 650V AC for 1 minute

Environmental

Temperature Rating: -55°C to +85°C



Process Rating: 260°C (per J-STD-020C)

**RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated in writing by 3M, this information represents 3M's knowledge and belief based on information provided by third party suppliers to 3M.



P50 Series

P50 Series

Straight

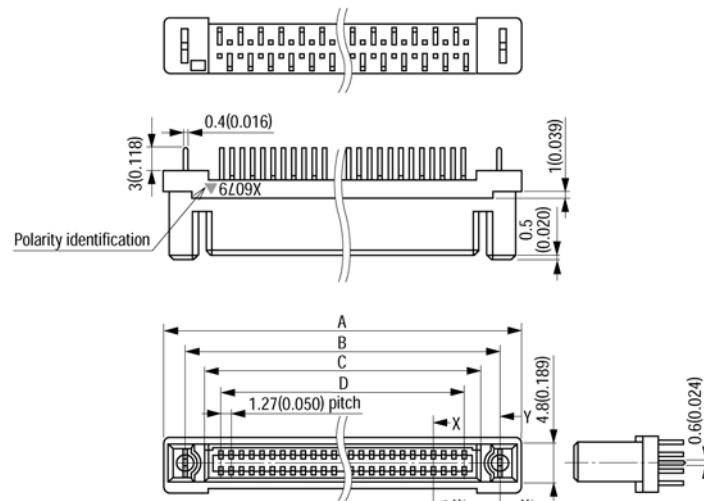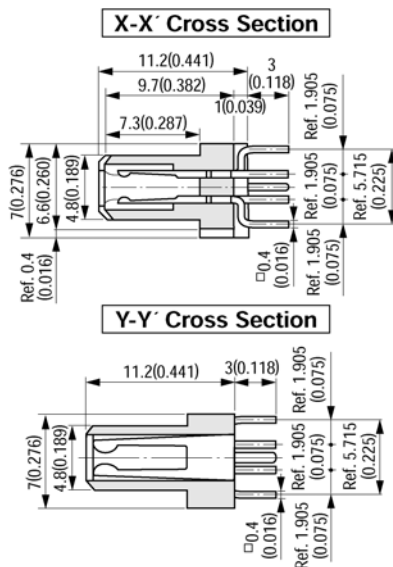

Printed Circuit Board Layout (Component Side View)

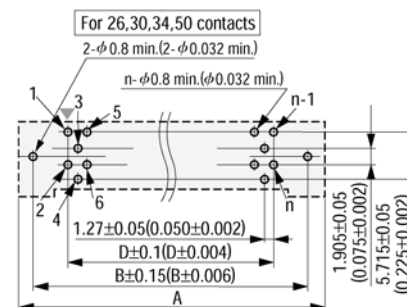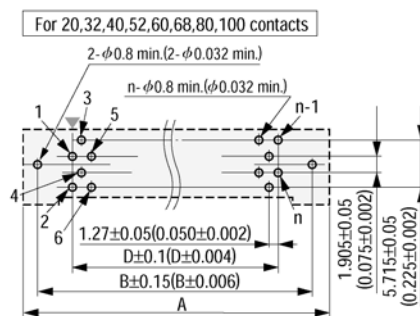

▼=Polarity identification
Recommended PCB Thickness $t=1.6\pm0.19(0.063\pm0.007)$
"n" is number of contacts.


TS-2052-02
Sheet 2 of 3

3M™ Pak 50 Power Ground Socket


.050" Straight and Right Angle Socket, with Power Ground Pin

P50 Series

Right Angle

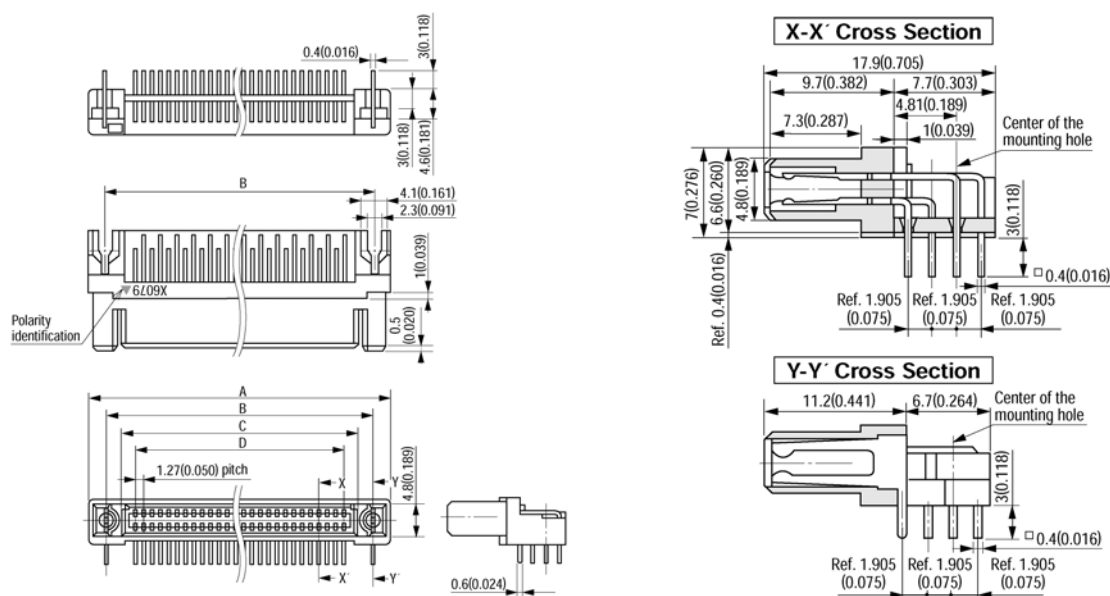

Printed Circuit Board Layout (Component Side View)

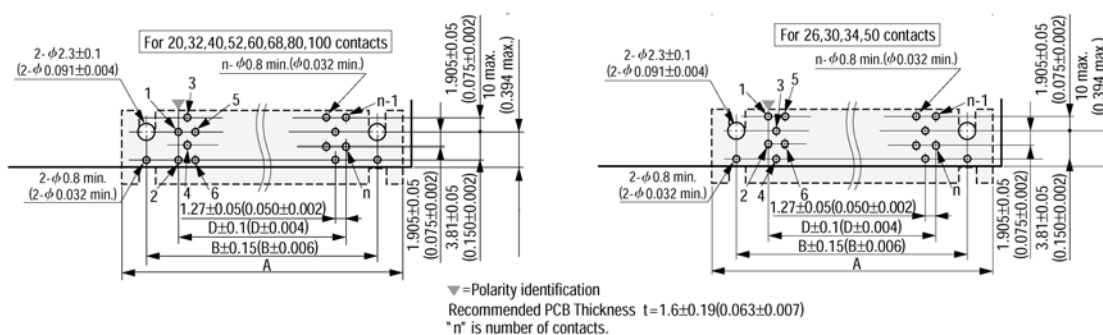

Ordering Information

P50 - XXX SG - XXX - XXX

Contact Quantity
(See Table)

Solder Tail Options:
S1 = Straight
SR1 = Right Angle

Plating Options:
TG = 10u" [.25um] gold with tin-lead solder tails
EA = 10u" [.25um] with gold flash solder tails
(RoHS compliant)

TS-2052-02
Sheet 3 of 3

3M

Interconnect Solutions

<http://www.3M.com/interconnects/>

3M is a trademark of 3M Company.

For technical, sales or ordering information call

800-225-5373

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



3M Electronics

6801 River Place Blvd.
Austin, TX 78726-9000
800/225-5373
www.3M.com/electronics

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Minimum 10%
Post-Consumer Fiber

Printed in USA.

© 3M 2006