


# IDC Breakout Helper – 2x13 (26 pin)

PRODUCT ID: 2101

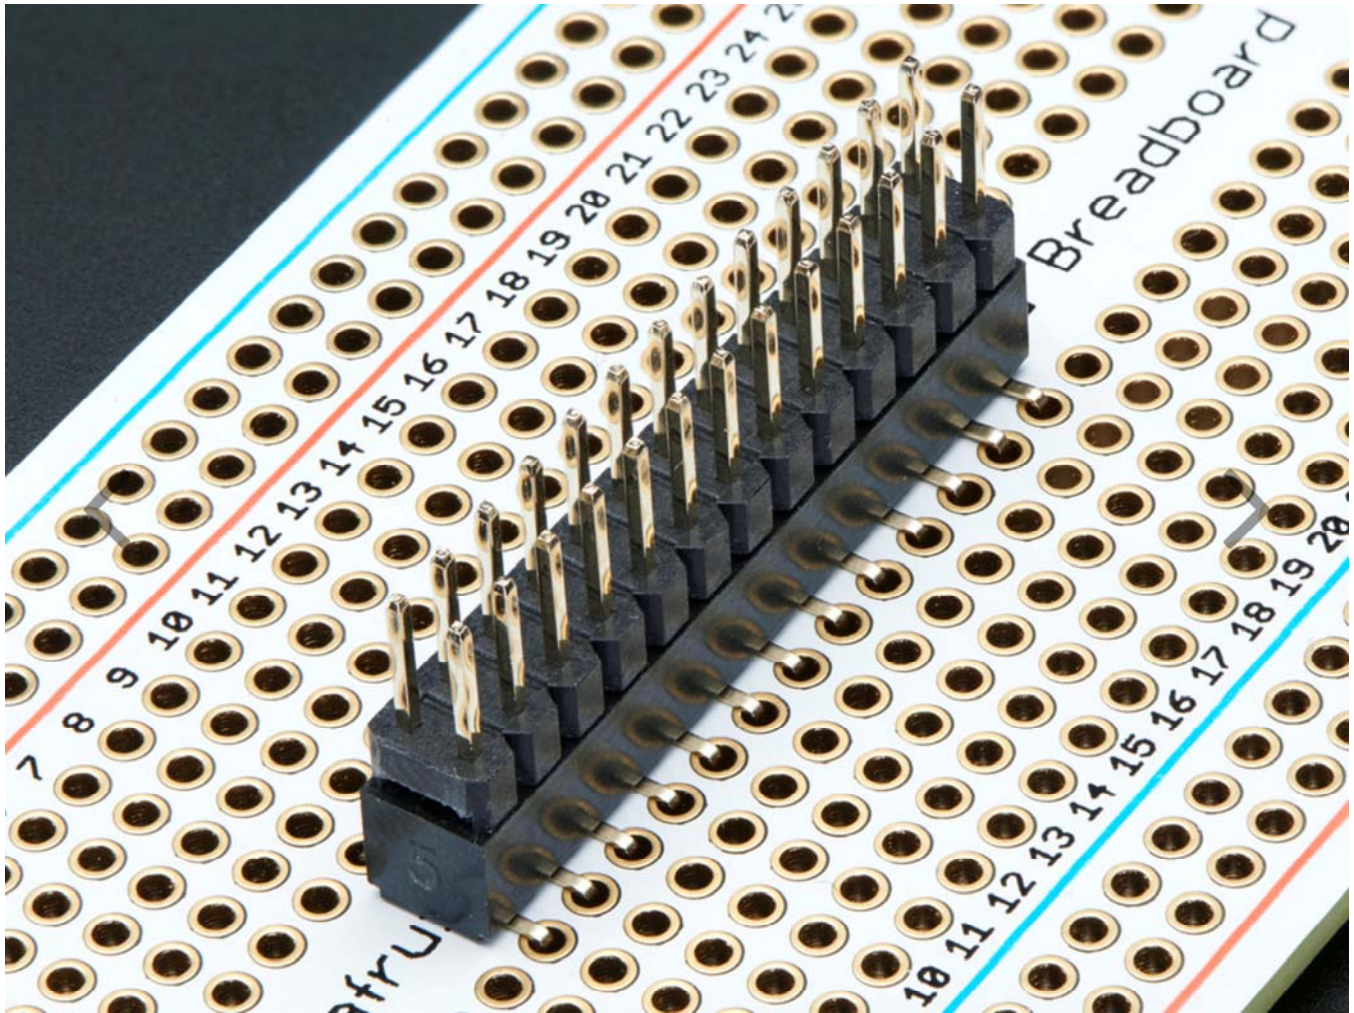

---

## DESCRIPTION

The "poor woman's" Raspberry Pi cobbler! This combo of 2x13 pin (0.1 spaced) header and socket is for our popular GPIO Ribbon Cable for Raspberry Pi Model A and B. It comes in two parts, a 'pin-through' socket and a male header. The socket straddles the center of a breadboard or Perma-Proto and then header plugs into the top of the socket. Since IDC cables are so standard, but a royal pain to use with breadboards, this is a good and cheap hack for prototyping. Works best when soldered in place. We have used these to prototype on a solderless breadboard but some customers report their breadboards don't play nice with the shorter pins so your mileage may vary

Each order comes with one socket and one header. Breadboard, Perma Proto and IDC cable not included!

We also have helpers for:

- 2x20 Pins
- 2x16 Pins
- 2x8 Pins
- 2x5 Pins
- 2x3 Pins

# Technical Details



Dimensions (assembled): 33.5mm x 8mm x 17mm / 1.3" x 0.3" x 0.7"

Dimensions (header): 33mm x 5mm x 12mm / 1.3" x 0.2" x 0.5"

Dimensions (socket): 33.5mm x 8mm x 8mm / 1.3" x 0.3" x 0.3"

Weight (assembled): 3g