

DIP H



- ## Typical Applications

- Complete part numbers for BPA Series are shown on pages H-11 thru H-12. All switches supplied in "OFF" position.

www.ittcannon.com

C&K BPA Series Side Actuated DIP Switches



H


DIP

Side Actuator – Surface Mount Terminals

PART NUMBER	NO. POS.	DIM. 'A'	QUANTITY PER TUBE
BPA02SK	2	.280 (7,11)	60
BPA04SK	4	.480 (12,19)	35
BPA05SK	5	.578 (14,68)	30
BPA06SK	6	.680 (17,30)	25
BPA07SK	7	.778 (19,76)	20
BPA08SK	8	.878 (22,30)	20
BPA09SK	9	.978 (24,84)	15
BPA10SK	10	1.078 (27,43)	15

Schematic

SPST

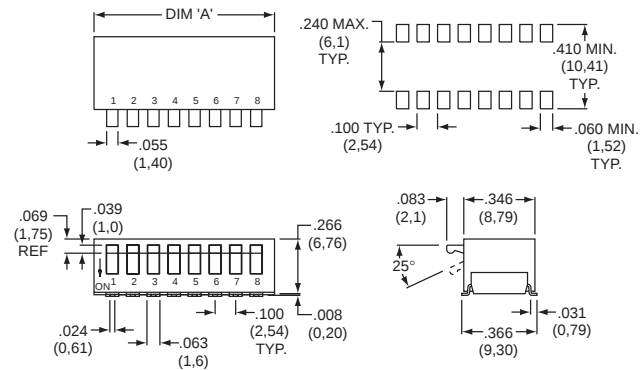


NOTE: Reverse throw available, add "R" to part number for "on" in "up" position. (example: BPA08RSK)


Tape & Reel Packaging - Surface Mount Options Only 4, 8 & 9 Positions Only

POLES	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'	DIM. 'E'
4	.453 (11,5)	—	.945 (24,0)	.508 (12,9)	.961 (24,4)
8	.795 (20,2)	1.590 (40,4)	1.732 (44,0)	.894 (22,7)	1.748 (44,4)
9	.795 (20,2)	1.590 (40,4)	1.732 (44,0)	1.004 (25,5)	1.748 (44,4)


Note: For tape and reel packaging, add 'R' to end of part number.

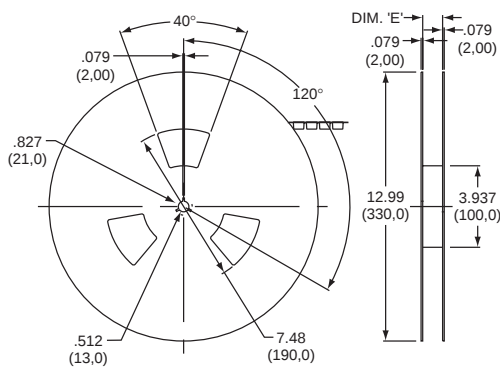


4 Position

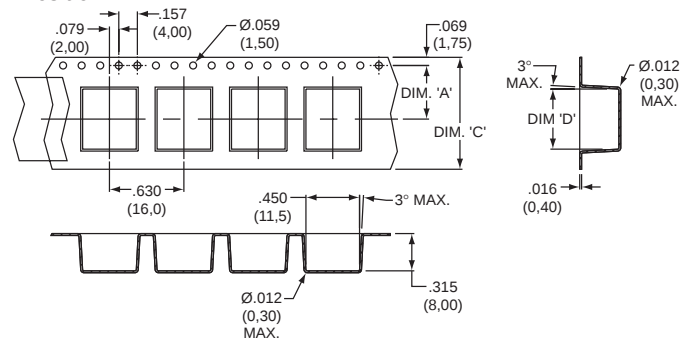

8 & 9 Position

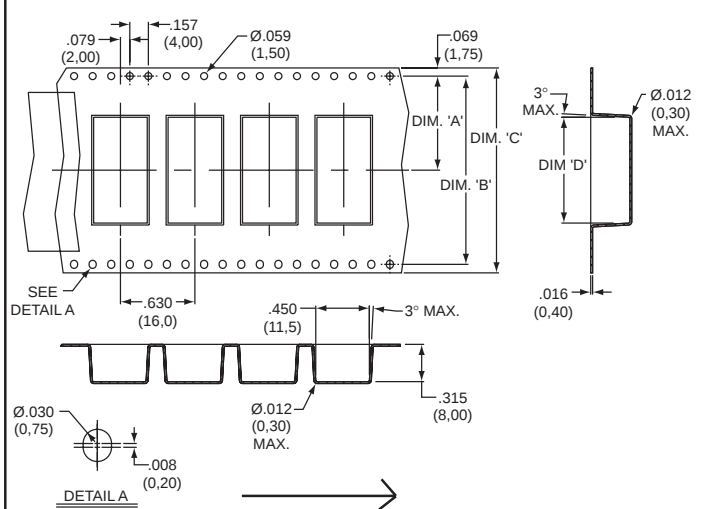

Direction of feed



Third Angle Projection

Dimensions are shown inch (mm)
Dimensions subject to change