

24" (23.5" viewable) Full HD LED Monitor

Ultimate Monitor for Entertainment and Gaming

VX2452mh



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(Sold Separately)

Whatever your multimedia viewing pleasure, the ViewSonic® VX2452mh 24" (23.5" viewable) Full HD display has got it covered. From extreme gaming to movies, sports and more, this sleek, glossy-finish display offers an outstanding visual experience. Enjoy blur-free images and crisp color performance, thanks to an ultra-fast 2ms response time and an ultra-high 50M:1 MEGA Dynamic Contrast Ratio, while dual integrated speakers complete the multimedia experience. Connecting to your favorite HD multimedia devices and gaming consoles is easy, with integrated D-sub, DVI and HDMI inputs. It's also easy to enjoy multi-monitor or wall-mounted visibility with efficient VESA-compatible mount. So if you're a serious gamer, or just someone who enjoys watching action-packed movies and sports, the ViewSonic VX2452mh delivers everything you need.

Key Features:

Full HD 1920x1080 resolution

HDMI, DVI, and VGA inputs for versatile connectivity

ClearMotiv® II ultra-fast 2ms response time

Ultra-high 50M:1 MEGA Dynamic Contrast Ratio

Game Mode enhances detail by brightening dark scenes


Designed for:

Gaming

Entertainment

24" (23.5" viewable) Full HD LED Monitor

VX2452mh

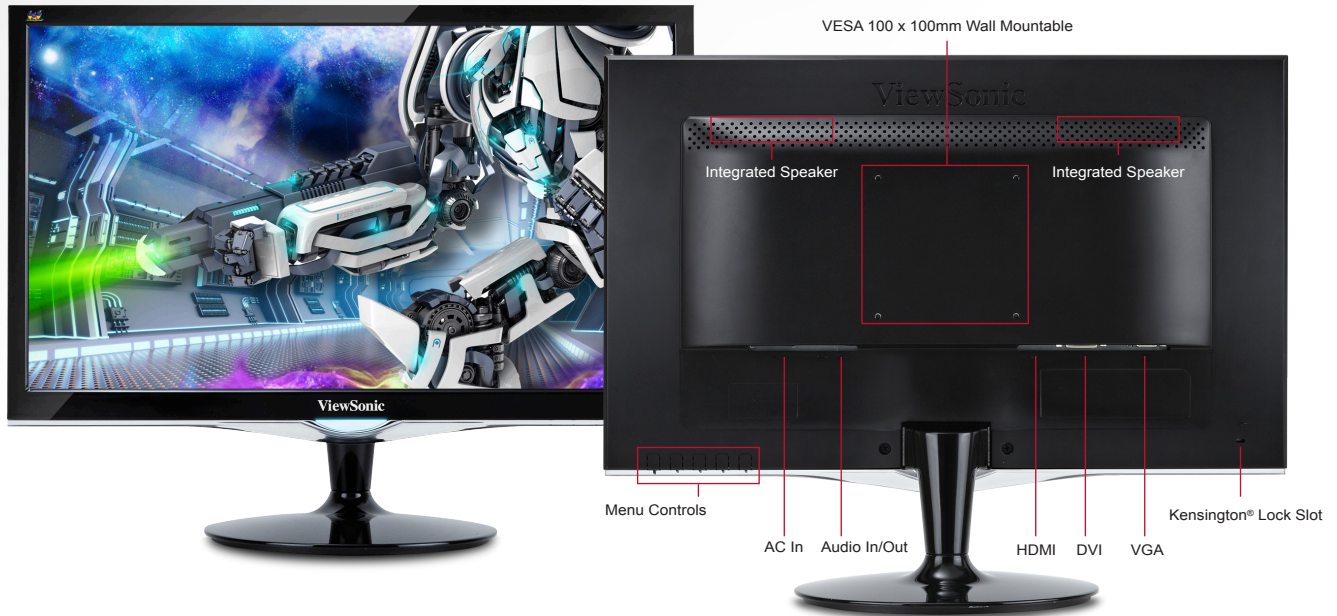

Specifications

LCD Panel	Type	23.6" Wide Color a-Si TFT Active Matrix LED
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920x1080
	Brightness	300 cd/m ² (typ.)
	Contrast Ratio	1000:1 (typ.)
	Dynamic Contrast Ratio	50M:1
	Viewing Angles	170° horizontal, 160° vertical
	Response Time	2ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
Panel Surface	Anti-glare, hard-coating (3H)	
VIDEO INPUT	Analog	RGB analog (0.7 / 1.0 Vp-p, 75 ohms)
	Digital	HDMI / DVI-D (TMDS, 100 ohms)
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
AUDIO	Speakers	2-watt (x2)
	Sync	Separate Sync
COMPATIBILITY	PC	PC compatibles (from VGA up to 1920x1080 non-interlaced)
	Mac®	Up to 1920x1080
CONNECTOR	Video Analog	15-pin mini D-sub (VGA)
	Video Digital	HDMI, DVI-D (with HDCP)
	Audio Out	3.5mm jack (blue)
	Audio In	3.5mm jack (green)
	Power	3-pin plug (CEE22)
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	21.5W (typ)
	Optimize	18.6W (typ)
	Conserve	15.8W (typ)

CONTROLS	Front Panel Buttons	Power, 1, 2, up, down
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Color Adjust, Audio Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)
ERGONOMICS	Tilt	Forward 0°, Back 20°
	Temperature	32~104° F (0~40° C)
OPERATING CONDITIONS	Humidity	10~90% (non-condensing)
	DIMENSIONS (W x H x D)	Physical (w/ Stand)
Physical (w/o Stand)		22.0 x 14.0 x 2.1 in. / 559.2 x 356.7 x 53.0 mm
Packaging		24.0 x 17.9 x 4.8 in. / 609 x 454 x 123 mm
WEIGHT	Net (w/ Stand)	8.3 lb. / 3.8 kg
	Net (w/o Stand)	7.6 lb. / 3.5 kg
	Gross	11.9 lb. / 5.4 kg
WALL MOUNT	VESA-compatible	100 x 100 mm
REGULATIONS	CE, CB, BSMI, PSB, SASO, C-tick, UL/cUL, FCC-B (including ICES003), TUV-S, NOM, GOST-R/Hygienic, UkrSEPRO, Erp, CCC, China Energy, ENERGY STAR 5.2, EPEAT Silver, WEEE, RoHS, SVHC list	
RECYCLE / DISPOSAL	Please dispose of in accordance with local, state or federal laws.	
POWER MANAGEMENT	ENERGY STAR® standards	
WARRANTY	Three-year limited warranty on parts, labor and backlight.	

Optional Accessories

HDMI to DVI Cable 6FT.....	CB-00008948
DVI-D to DVI-D Cable 6FT.....	CB-00008187
Desktop Display Wall Mount Kit.....	LCD-WMK-001

What's in the box?

VX2452mh display, power cable, VGA cable, DVI cable, audio cable, Quick Start Guide, ViewSonic Wizard CD



SPEAKERS



50M:1 DCR



HDMI INTERFACE



RESPONSE TIME



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.