## Honeywell



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

### 364W20K

364 Series Trimmer, 20 kOhm, 0.5 W, 25 Turns, Square Body, Vertical Shaft

#### Features

- 0.5 Watt
- Cermet element
- Low cost
- Superior setability and stability
- CRV to 3 % or 3 Ohms
- Contact idles at stops

#### **Typical Applications**

- Voltage divider circuits
- Telecommunications

#### Description

The 364 Series is a low cost, 9.53 mm (3/8 in.) square, multi-turn trimmer. Made in accordance to MIL-R-22097 standards, the 364 is sealed for cleaning in common solvernts.

## Honeywell

### 364W20K


364 Series Trimmer, 20 kOhm, 0.5 W, 25 Turns, Square Body, Vertical Shaft

Product Specifications	
Product Type	Trimmer
Watts	0.5 W
Turns	25
Element Type	Cermet
Resistance Value	20 kOhm
Resistance Tolerance	± 10 %
Temperature Coefficient	± 100 ppm/ °C
Body	9,53 mm [0.375 in] square
Shaft Location	Vertical
Rotational Life	200 cycles
Series Name	364 Series
Availability	Global
UNSPSC Code	4111363300
UNSPSC Commodity	4111363300 Potentiometers

# Honeywell

### 364W20K

364 Series Trimmer, 20 kOhm, 0.5 W, 25 Turns, Square Body, Vertical Shaft

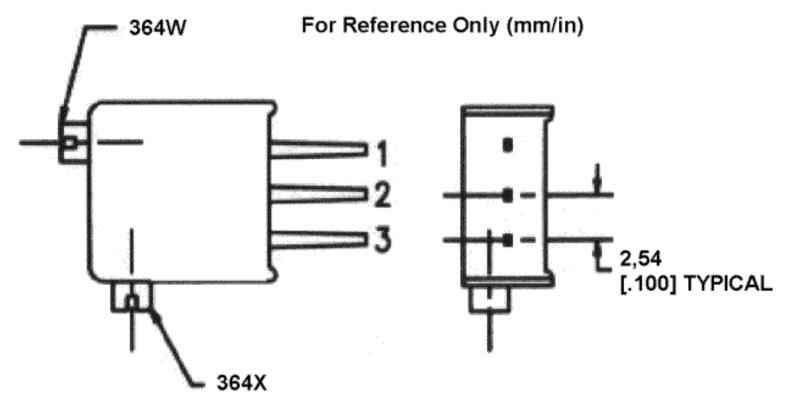

# Honeywell

### 364W20K

364 Series Trimmer, 20 kOhm, 0.5 W, 25 Turns, Square Body, Vertical Shaft

## 🛦 WARNING

#### PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

#### A WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

© Copyright Honeywell Inc. 1998-2004 All rights reserved.