

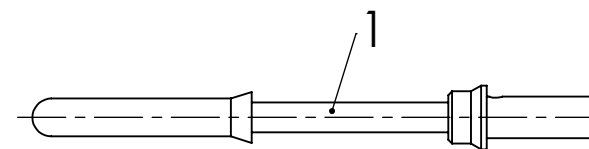
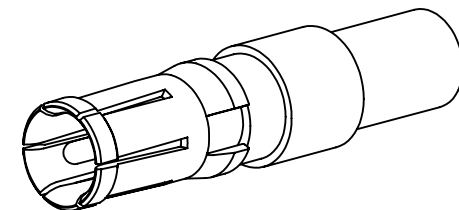


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

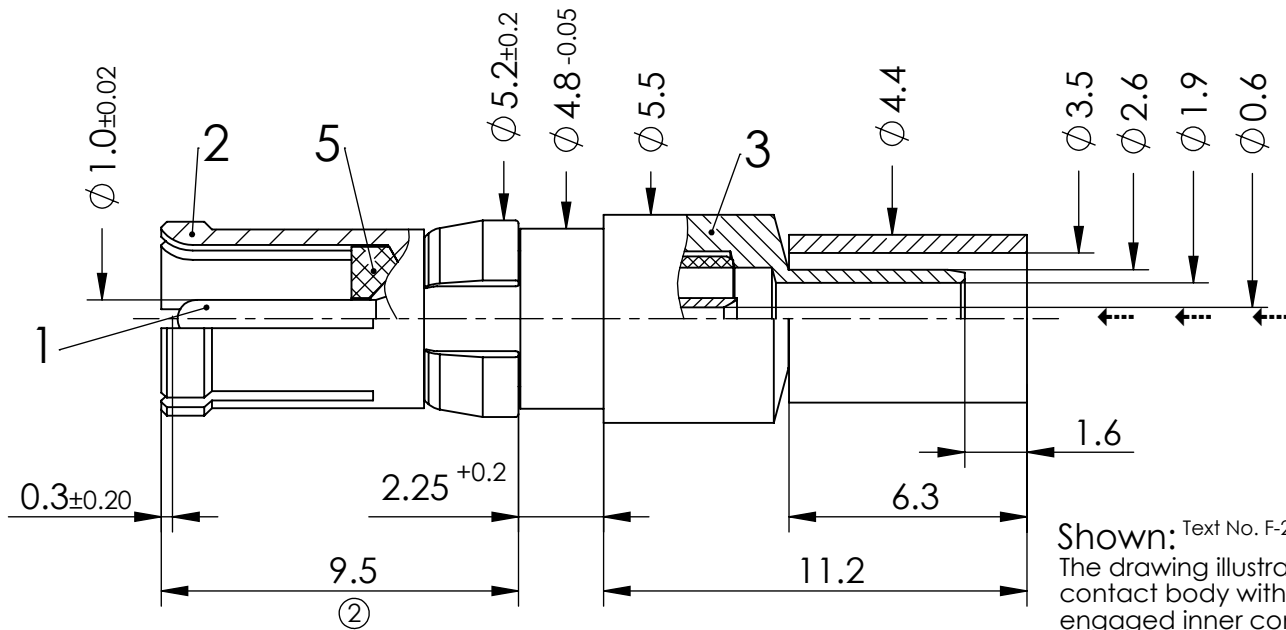

Shown: Text No. F-2
The drawing illustrates a contact body with an engaged inner conductor

Cable trimming
dimensions (3:1)



Text No. W-1

FCT tools:

Crimping of inner conductor:

Hand tool: M22520/2-01
Locator: K1003

Pneumatic crimp tool: WA22
Locator: K1003

Cable:
AWG24 / SEL. 5
AWG26 / SEL. 5
AWG28 / SEL. 4
AWG30 / SEL. 3

Text No. W-2

FCT tools:

Crimping of outer conductor:

Hand tool: M22520/5-01
Die: Y138P cavity B

Pneumatic crimp tool: HX23 (replacement for PH4001) ③

Extraction tool: DRK38

IMPEDANCE			50 Ohm		COAXIAL CONTACT		SCALE 5:1		CABLE RG316U double braided								
FOR			D-SUB														
DIMENSIONS IN MM					DRAWN		NAME / DATE			DATA SHEET							
					erappenglitz 26-02-2002												
MATERIAL + FINISH SEE EXTRA SHEET					CHECKED		MTeubel 23-10-2012										
UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR REFERENCE ONLY												PART NO.			REV.		
												FMS006S			3		
3		16-10-2012		23305													
REV.		DATE		INDEX		ORIGINAL: DIN A4-DRAWING AS A FILE							REPLACEMENT FOR:			PAGE: 1/1	