

SAW filters for mobile communications

Series/Type: B7754

The following products presented in this data sheet are being withdrawn.

| Ordering Code | Substitute Product | Date of Withdrawal | Deadline Last Orders | Last Shipments |
|-----------------|--------------------|--------------------|-------------------------|----------------|
| B39202B7754C810 | B39202B9031E910 | 2008-03-14 | 2008-08-31 | 2008-10-15 |

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.




| SAW Components | | B7754 |
|------------------------|---------------------|------------|
| Low-Loss Filter for Me | obile Communication | 1950,0 MHz |
| Data Sheet | | |

Features

- Low-loss RF filter for W-CDMA mobile telephone system, transmit path
- High stopband attenuation
- Usable passband 60 MHz
- Unbalanced/unbalanced operation
- Package size: 2 mm x 2.5 mm (4 pin, diagonal pinning)

Terminals

• Ni, gold-plated

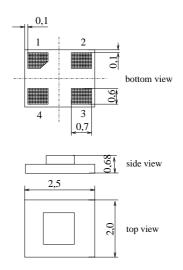


Chipsized SAW package DCS4D

Dimensions in mm, approx weight 0,012g

Pin configuration

| 1 | Input |
|-----|--------|
| 3 | Output |
| 2,4 | Ground |



| Туре | Ordering code | Marking and Package according to | Packing according to |
|-------|-------------------|-------------------------------------|-------------------------|
| B7754 | B39202-B7754-C810 | C61157-A7-A118 | F61074-V8153-Z000 |

Electrostatic Sensitive Device (ESD)

Maximum ratings

| Operable temperature range | Т | - 20 / + 85 | °C | |
|----------------------------|------------------|-------------|-----|------------------------------|
| Storage temperature range | T _{stq} | – 40 / + 85 | °C | |
| DC voltage | V _{DC} | 3 | V | |
| Source power | Ps | 10 | dBm | source impedance 50 Ω |






| SAW Componer | | | | | | B7754 |
|--|--------------------------------|---|------|--------|------|----------|
| Low-Loss Filter | | 1950,0 MHz | | | | |
| Data Sheet | | SM | | | | |
| Characteristics | | | | | | |
| Operating temperate Terminating source Terminating load im | impedance: | T = - Z _S = 5 Z _L = 5 | | | | |
| | | | min. | typ. | max. | |
| Center frequency | | f _C | _ | 1950,0 | | MHz |
| Maximum insertior | n attenuation 1920,0 1980,0 | | nax | 2,2 | 2,5 | dB |
| Ripple | 1920,0 1980,0 | p- MHz | р | 1,0 | 1,2 | dB |
| Input VSWR | 1920,0 1980,0 M | Hz | _ | 1,9 | 2,1 | |
| Output VSWR | 1920,0 1980,0 M | | _ | 1,9 | 2,1 | |
| Attenuation | | α | | | | |
| | 0,01670,0 | MHz | 26 | 28 | _ | dB |
| | 1670,01720,0 | MHz | 29 | 31 | _ | dB |
| | 1720,01750,0 | MHz | 30 | 32 | — | dB |
| | 1750,01880,0 | MHz | 31 | 33 | | dB |
| | 2025,02050,0 | MHz | 35 | 45 | | dB |
| | 2110,02170,0 | MHz | 34 | 36 | | dB |
| | 2300,02490,0 2490,02740,0 | MHz MHz | 34 | 36 | | dB dB |
| | Z490,0Z/40,0 | | 35 | 38 | | |
| | 2740,03960,0 | MHz | 30 | 33 | | dB |




| SAW Componer | nts | | | | | | B7754 | | |
|---|--------------------------------|---------------|------------------------------|----------|----------|------|------------|--|--|
| Low-Loss Filter for Mobile Communication | | | | | | | 1950,0 MHz | | |
| Data Sheet | | SM | | | | | | | |
| Characteristics | | | | | | | | | |
| Operating temperat Terminating source Terminating load im | impedance: | $Z_{\rm S}$ = | = -20 to = 50 Ω = 50 Ω | ∘+85 °C | | | | | |
| | | | | min. | typ. | max. | | | |
| Center frequency | | | f _C | | 1950,0 | | MHz | | |
| Maximum insertion | n attenuation 1920,0 1980,0 | | α_{max} | _ | 2,4 | 2,8 | dB | | |
| Ripple | 1920,0 1980,0 | | р-р | _ | 1,0 | 1,6 | dB | | |
| Input VSWR | 1920,0 1980,0 M | Hz | | _ | 2,0 | 2,2 | | | |
| Output VSWR | 1920,0 1980,0 M | Hz | | _ | 2,0 | 2,2 | | | |
| Attenuation | | | α | | | | | | |
| | 0,01670,0 | MHz | | 26 | 28 | — | dB | | |
| | 1670,01720,0 | MHz | | 29 | 31 | — | dB | | |
| | 1720,01750,0 | MHz | | 30 | 32 | — | dB | | |
| | 1750,0 1880,0 | MHz | | 31 | 33 | — | dB | | |
| | 2025,02050,0 | MHz | | 35 | 45 | — | dB | | |
| | 2110,02170,0 2300,02490,0 | MHz MHz | | 34 34 | 36 36 | — | dB dB | | |
| | 2300,02490,0 2490,02740,0 | MHz | | 34 35 | 30 | _ | dВ | | |
| | 2740,0 | MHz | | 30 30 | 33 | _ | dB | | |
| | | 1111 | | 00 | 00 | | uD | | |



Transfer function (spec for 25 $^\circ\text{C}$ \pm 2 $^\circ\text{C}$):

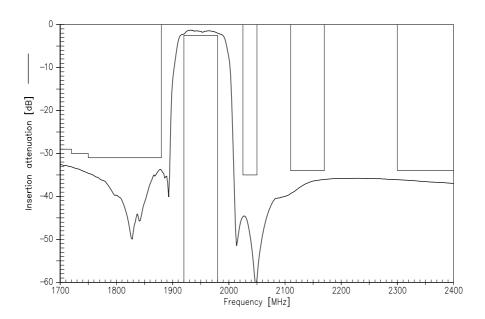

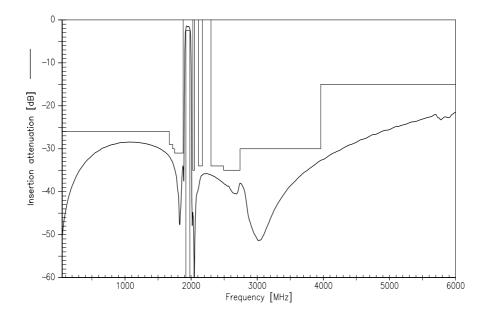

Oct 23, 2003

5



| SAW Components | | B7754 |
|------------------------|--------------------|------------|
| Low-Loss Filter for Mo | bile Communication | 1950,0 MHz |
| Data Sheet | SMD | |

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC WT P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2003. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Oct 23, 2003