

# Ceramic Monoblock Bandpass Filter




# Model KFF6193A Technical Data

## Features:

- Small Size
- High Performance
- SMD

## Description and Applications:

This 2 pole monoblock filter is primarily designed for ISM applications at 915 MHz.

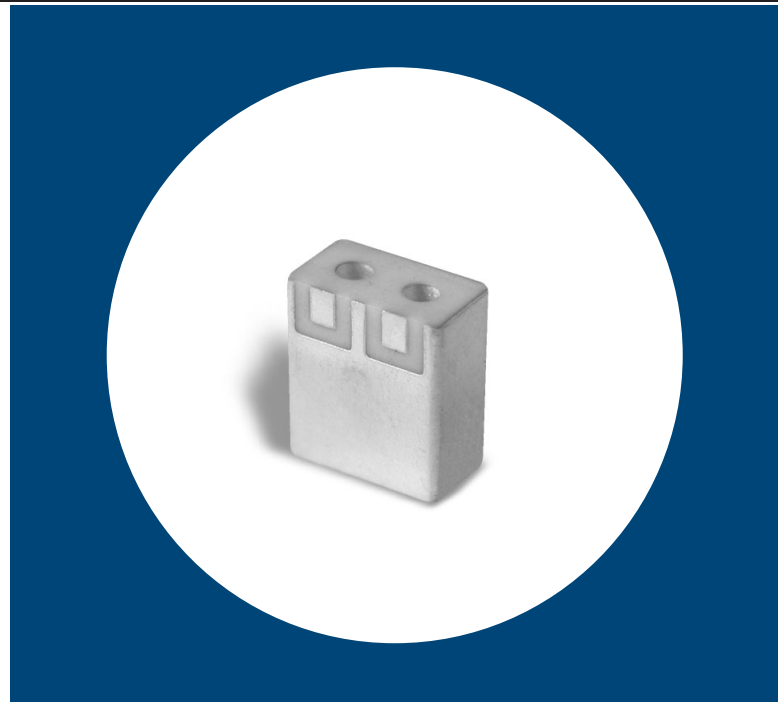

## Electrical Specifications


Parameters	Frequency	Specifications @ 25° C
Insertion Loss	902 MHz to 928 MHz	2.0 dB max.
Forward Return Loss		10.0 dB min.
Attenuation	710 MHz	30.0 dB min.
Power Rating		1W
Impedance		50Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification	Typical Allowance
Insertion Loss	0.1dB
Return Loss	1.0dB
Stopbands	1.0dB

Rev. 1

**Typical Response Curve**

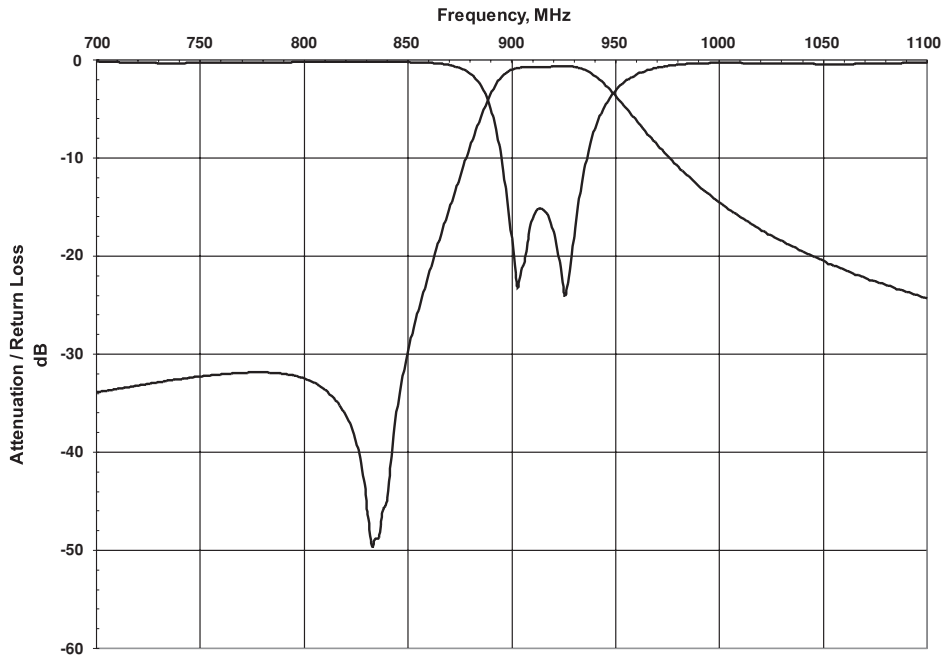


**Mechanical Dimensions**

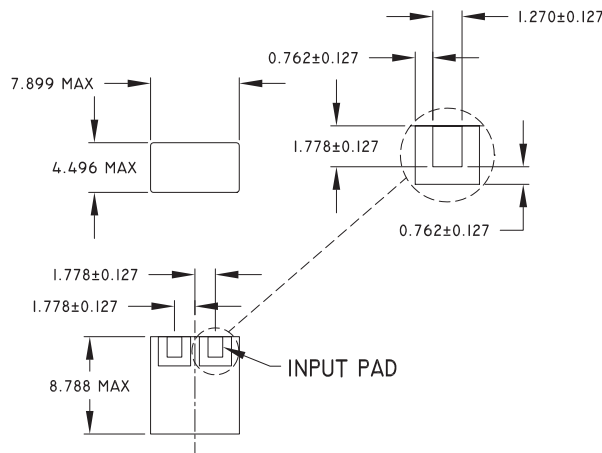


NOTE: RESONATOR HOLES NOT SHOWN.  
ALL DIMENSIONS IN MM.

**PC Board Layout**

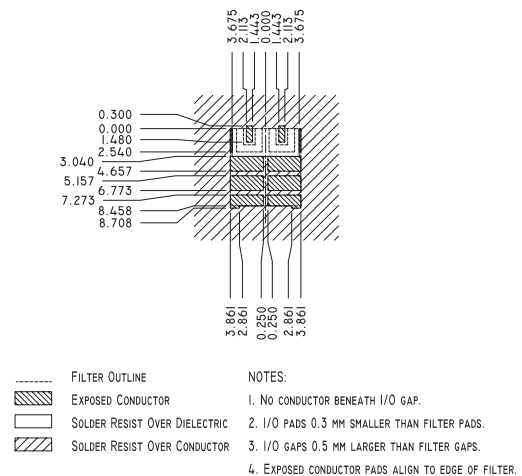


**Part Marking**

Y = LAST DIGIT OF YEAR  
WW = SEQUENTIAL WEEK NUMBER



**Packaging**

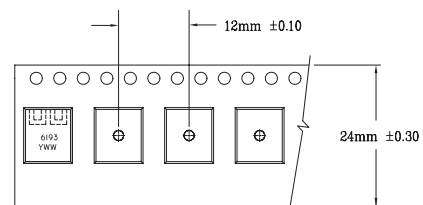

THIS PRODUCT IS SHIPPED IN REELED TAPES.  
1000 PIECES PER REEL .  
4.17 LBS PER REEL.

**Contact Information:**

**CTS WIRELESS COMPONENTS, INC.** / 171 Covington Drive / Bloomingdale, IL 60108  
PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287115Y01 Rev. 1

Date of Origin 03/04/02

Date of Revision 03/04/02

THIS DATA SHEET IS NOT AN OFFER FOR SALE AND SHALL NOT OBLIGATE CTS TO SELL THE PRODUCTS DESCRIBED HEREIN OR ANY OTHER PRODUCTS. CTS MAY, IN ITS SOLE DISCRETION, MODIFY OR DISCONTINUE THE SALE OF ITS PRODUCTS AT ANY TIME WITHOUT NOTICE. CTS MAKES NO WARRANTY, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PRODUCTS REFERENCED OR INFORMATION PROVIDED HEREIN.

CTS® is a registered trademark of CTS Corporation.