



## Water Flow Sensor - 1/2" SKU: SEN0217

---



### Contents

- [1 Introduction](#)
- [2 Specification](#)
- [3 Board Overview](#)
- [4 Tutorial](#)
  - [4.1 Requirements](#)
  - [4.2 Connection Diagram](#)
  - [4.3 Sample Code](#)
- [5 FAQ](#)

### Introduction


The Water Flow sensor measures the rate of a liquid flowing through it. The YF-S201 water flow sensor consists of a plastic valve body, flow rotor and hall effect sensor. It is usually used at the inlet end to detect the amount of flow. When liquid flows through the sensor, a magnetic rotor will rotate and the rate of rotation will vary with the rate of flow. The hall effect sensor will then output a pulse width signal. Connect it to a microcontroller and you can monitor multiple devices such as your coffee maker, sprinkler or anything else, and control the water flow rate to suit your needs!

- A 20 mm rifled pipe is recommended
- Avoid unit contact with corrosive chemicals
- The unit must be installed vertically, tilted no more than 5 degrees
- Liquid temperature should be less than 120 C to avoid damage to unit


## Specification

- Inner Diameter: 11 mm
- Outside diameter: 20 mm
- Proof Water Pressure: <1.75 MPa
- Water Flow Range: 1-30 L/min
- Voltage Range: 3.5~12 V
- Operating Current: 15 mA (DC 5V)
- Insulation Resistance: >100 MΩ
- Accuracy: ±5% (2~30L/min)
- The Output Pulse High Level: >4.7 VDC (DC input voltage 5 V)
- The Output Pulse Low Level: <0.5 VDC (DC input voltage 5 V)
- Output Pulse Duty Ratio: 50% ± 10%
- Water-flow Formula: 1L = 450 square waves
- Working Humidity Range: 25% ~ 95% RH (no frost)
- Dimension: 62\*36\*35 mm/2.44\*1.37\*1.37 inches
- Weight: 52g

## Board Overview

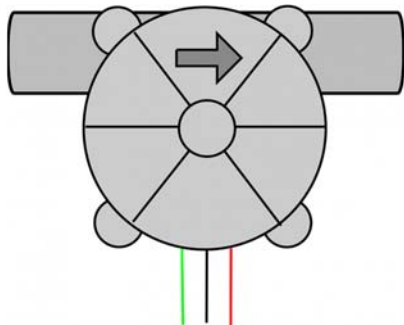

Number	Color	Name	Description
1	Green	Signal	Pulse Signal
2	Red	VCC	5~12V
3	Black	GND	GND

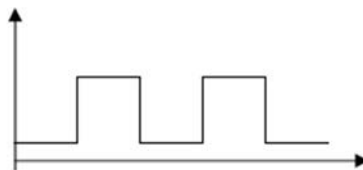

Duty Cy=40%~60%

## Pulse Signal

## Tutorial

In this Tutorial, we'll measure liquid flow using this sensor.

## Requirements


### Hardware

DFRduino UNO R3  
Water flow sensor  
Jumper Wires

### Software

Arduino IDE, [Click to Download Arduino IDE from Arduino®](https://www.arduino.cc/en/Main/Software)  
<https://www.arduino.cc/en/Main/Software>

## Connection Diagram

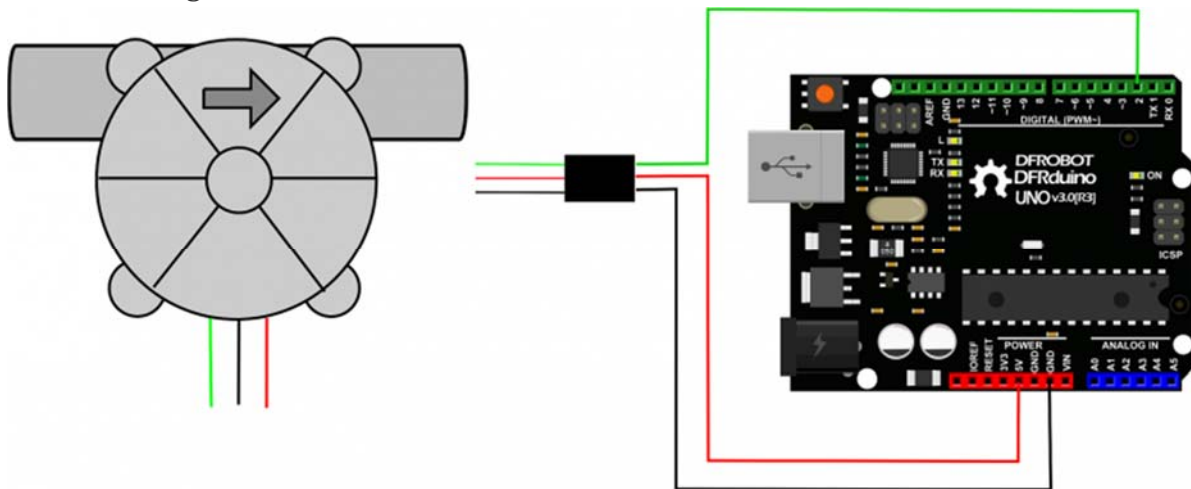

## Sample Code

```
1 /*****  
2 This example reads Water flow sensor Sensor.  
3  
4 Created 2016-3-13  
5 By berinie Chen <bernie.chen@dfrobot.com>
```

```
6
7 GNU Lesser General Public License.
8 See <http://www.gnu.org/licenses/> for details.
9 All above must be included in any redistribution
10 *****/
11
12 /*****Notice and Trouble shooting*****/
13 1.Connection and Diagram can be found here http://www.dfrobot.com/wiki/index.php?title=Water\_Flow\_Sensor\_-\_1/2%E2%80%B3\_SKU:\_SEN0217#Sample\_Code
14 2.This code is tested on Arduino Uno.
15 *****/
16 volatile double waterFlow;
17 void setup() {
18   Serial.begin(9600); //baudrate
19   waterFlow = 0;
20   attachInterrupt(0, pulse, RISING); //DIGITAL Pin 2: Interrupt 0
21 }
22 void loop() {
23   Serial.print("waterFlow:");
24   Serial.print(waterFlow);
25   Serial.println(" L");
26   delay(500);
27 }
28
29 void pulse() //measure the quantity of square wave
30 {
31   waterFlow += 1.0 / 450.0;
32 }
```

---

## FAQ

For any questions, advice or cool ideas to share, please visit the [DFRobot Forum](#).