


Single Phase Rectifier Bridge

$$I_{dAV} = 36 \text{ A}$$

$$V_{RRM} = 800-1600 \text{ V}$$

Preliminary data

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
900	800	VGO 36-08io7
1300	1200	VGO 36-12io7
1500	1400	VGO 36-14io7
1700	1600	VGO 36-16io7



Symbol	Test Conditions	Maximum Ratings	
I_{dAV} ①	$T_H = 85^\circ\text{C}$, module	36	A
I_{dAVM} ①	module	40	A
I_{FRMS} , I_{TRMS}	per leg	31	A
I_{FSM} , I_{TSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ (50 Hz), sine	320 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine	350 A
	$T_{VJ} = T_{VJM}$; $V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ (50 Hz), sine	280 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine	310 A
I^2t	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ (50 Hz), sine	500 A ² s
		$t = 8.3 \text{ ms}$ (60 Hz), sine	520 A ² s
	$T_{VJ} = T_{VJM}$; $V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ (50 Hz), sine	390 A ² s
		$t = 8.3 \text{ ms}$ (60 Hz), sine	400 A ² s
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$; $f = 50 \text{ Hz}$, $t_p = 200 \mu\text{s}$; $V_D = 2/3 V_{DRM}$; $I_G = 0.3 \text{ A}$; $di_G/dt = 0.3 \text{ A}/\mu\text{s}$	repetitive, $I_T = 50 \text{ A}$	150 A/ μs
		non repetitive, $I_T = 1/2 \cdot I_{dAV}$	500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$; $V_{DR} = 2/3 V_{DRM}$; $R_{GK} = \infty$; method 1 (linear voltage rise)		1000 V/ μs
V_{RGM}		10	V
P_{GM}	$T_{VJ} = T_{VJM}$; $I_T = I_{TAVM}$	$t_p = 30 \mu\text{s}$	$\leq 10 \text{ W}$
		$t_p = 500 \mu\text{s}$	$\leq 5 \text{ W}$
		$t_p = 10 \text{ ms}$	$\leq 1 \text{ W}$
			0.5 W
P_{GAVM}			
T_{VJ}		-40...+125	$^\circ\text{C}$
T_{VJM}		125	$^\circ\text{C}$
T_{stg}		-40...+125	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS	$t = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M4)	1.5 - 2	Nm
		14 - 18	lb.in.
Weight	typ.	18	g

Features

- Package with DCB ceramic base plate
- Isolation voltage 3000 V~
- Planar passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering

Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- Small and light weight

Data according to IEC 60747 refer to a single diode/thyristor unless otherwise stated

① for resistive load at bridge output. IXYS reserves the right to change limits, test conditions and dimensions.

Fig. 1 Gate trigger range

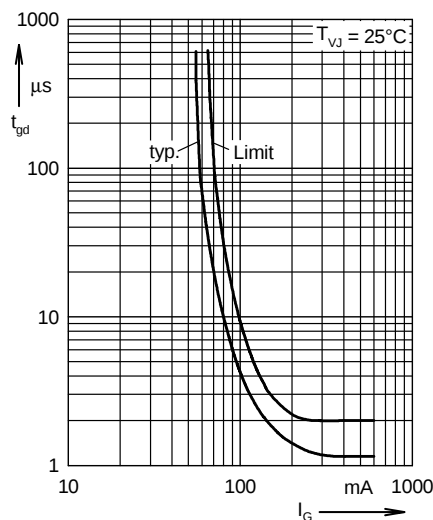


Fig. 2 Gate controlled delay time t_{gd}

Dimensions in mm (1 mm = 0.0394")

