


LOCAL AREA NETWORK

UNSHIELDED TWISTED PAIR (UTP)

CATEGORY 5e

**PLENUM AND
NON-PLENUM**

UNSHIELDED TWISTED PAIR (UTP) SOLID CONDUCTOR, CATEGORY 5e, 100 Mbps.

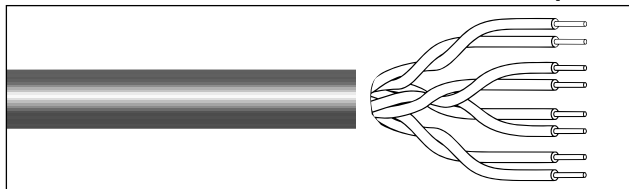

Alpha Part No.	Rating	Ohms @ MHz
9504CE	Non-Plenum	See Chart at Right
9504FE	Plenum	See Chart at Right

NEW!

Introducing Alpha's new Category 5 Enhanced Cable. Alpha's Cat 5e supports current Category 5 enhanced applications such as 100 base TX, 100 base VG anylan and 155 ATM. Alpha's Cat 5e will support future Cat 5 enhanced applications like Gigabit Ethernet.

Nominal Impedance Ohms @ MHz

100 ± 15%
1.0-100 MHz

100 ± 25%
100.1-200.0 MHz

COLOR CODE INFORMATION

Alpha Part Nos.: **9504CE** & **9504FE**
White/Blue & Blue
White/Orange & Orange
White/Green & Green
White/Brown & Brown

PRODUCT DESCRIPTION

Alpha Part No.	Application	Conductor		Insulation Material* Thickness Diameter Inches (mm)	Nominal Capacitance pF / FT (pF / m)	Jacket Material* Nom. O.D. Inches (mm)	Maximum Attenuation dB / 100' (dB / 100m) @ MHz	Minimum Near End Cross-Talk dB / 100' (dB / 100m) @ MHz
		No. of Pairs	AWG Stranding Material* DCR Ohms / 1000' (/ Km)					
9504CE 300V / 60°C Type CMG CMG FT4 Non-Plenum Rated	ANSI/TIA/EIA-568-A-5 Category 5e ISO/IEC 11801 Category 5 NEMA WC-63.1 Category 5e	4	24 Solid BC 28.4 (98,2) Max.	Polyolefin 0.008 (0,20) 0.037 (0,94)	Maximum 15 (49,2) @ 1 KHz	Slate, Blue, White PVC 0.210 (5,33)	0.61 (2,0) @ 1.0 1.25 (4,1) @ 4.0 1.77 (5,8) @ 8.0 1.98 (6,5) @ 10.0 2.50 (8,2) @ 16.0 2.83 (9,3) @ 20.0 3.17 (10,4) @ 25 3.57 (11,7) @ 31.25 5.18 (17,0) @ 62.5 6.71 (22,0) @ 100 8.53 (28,0) @ 155 9.88 (32,4) @ 200	19.0 (62,3) @ 1.0 16.2 (53,3) @ 4.0 14.9 (48,8) @ 8.0 14.4 (47,3) @ 10.0 13.5 (44,3) @ 16.0 13.0 (42,8) @ 20.0 12.6 (41,3) @ 25 12.2 (39,9) @ 31.25 10.8 (35,4) @ 62.5 9.8 (32,3) @ 100 9.0 (29,5) @ 155 8.5 (27,8) @ 200

Alpha Part No.	Application	Conductor		Insulation Material* Thickness Diameter Inches (mm)	Nominal Capacitance pF / FT (pF / m)	Jacket Material* Nom. O.D. Inches (mm)	Maximum Attenuation dB / 100' (dB / 100m) @ MHz	Minimum Near End Cross-Talk dB / 100' (dB / 100m) @ MHz
		No. of Pairs	AWG Stranding Material* DCR Ohms / 1000' (/ Km)					
9504FE 300V / 60°C Type CMP CMP FT6 Plenum Rated	ANSI/TIA/EIA-568-A-5 Category 5e ISO/IEC 11801 Category 5 NEMA WC-63.1 Category 5e	4	24 Solid BC 28.4 (98,2) Max.	FEP Teflon* 0.007 (0,18) 0.034 (0,86)	Maximum 15 (49,2) @ 1 KHz	Slate, Blue, White Plenum 0.200 (5,08)	0.61 (2,0) @ 1.0 1.25 (4,1) @ 4.0 1.77 (5,8) @ 8.0 1.98 (6,5) @ 10.0 2.50 (8,2) @ 16.0 2.83 (9,3) @ 20.0 3.17 (10,4) @ 25 3.57 (11,7) @ 31.25 5.18 (17,0) @ 62.5 6.71 (22,0) @ 100 8.53 (28,0) @ 155 9.88 (32,4) @ 200	19.0 (62,3) @ 1.0 16.2 (53,3) @ 4.0 14.9 (48,8) @ 8.0 14.4 (47,3) @ 10.0 13.5 (44,3) @ 16.0 13.0 (42,8) @ 20.0 12.6 (41,3) @ 25 12.2 (39,9) @ 31.25 10.8 (35,4) @ 62.5 9.8 (32,3) @ 100 9.0 (29,5) @ 155 8.5 (27,8) @ 200

*Refer to Materials Abbreviation Guide on Page 254

*Registered trademark of E.I. DuPont Co.

SPECIFICATIONS

UL LISTED

AVAILABILITY

■ See Page 275 for available put-ups



Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

Web Site: www.alphawire.com
Email: info@alphawire.com