
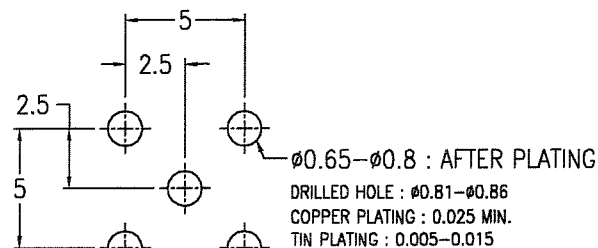




PRODUCT NO.

10026910-001

10026910-001LF

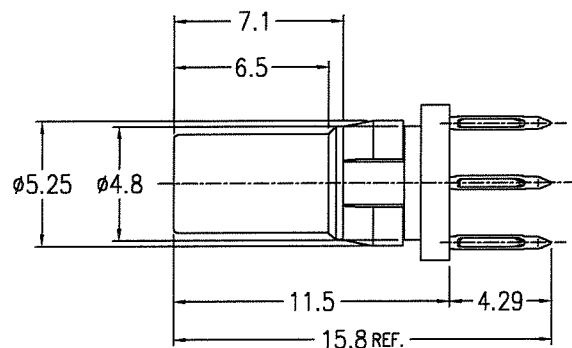

RECOMMENDED PCB LAYOUT
(TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.05)

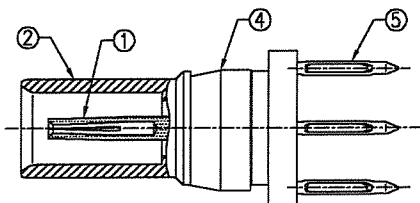

NOTE

1. DIMENSIONS ACCORDING TO DIN 41626.
2. LF SUFFIX MEANS FOR NOTE 3 LEADFREE IDENTIFICATION
3. LF PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

10026910-001
10026910-001LF

No.	DESCRIPTION	QTY.	MATERIAL	PLATING
①	INNER CONTACT	1	BeCu	Au 0.8 μ m
②	SHELL	1	BRASS	Au 0.3 μ m
		1	BRASS RoHS COMPATIBLE	
③	INSULATOR	2	PTFE	—
④	RETAINER	1	Ph.Bronze	Ni 3-6 μ m
⑤	P.F. PIN	89044-801	CuSn6 F4B	SnPb 0.08-1.5 μ m
		89044-801LF		Sn 0.5-1.5 μ m

mat'l. code SEE TABLE				surface ISO 1302 ✓ tolerance ISO 406 ISO 1101	projection 	product family 5H6F - METRAL OTHERS	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified	title DIN COAX RECE. STR P.F. (50 OHM)	
A	RELEASED	J03-0168	Y.K	4/8/'03	angles linear 0.XX ± 0.3		
B	REVISED	J06-0079	S.O	3/1/'06	0° $\pm 2'$		
C	REVISED	J06-0536	R.S	12/27/'06	0.XXX		
				dr	Y.KODAIRA	4/8/'03	dwg no 10026910 sheet 1 of 1 size A4
				enrg	R.SHOUJI	12/27/'06	
				chr		1/8/07	
				appd		1/8/07	
sheet index	revision sheet	C	1				type Product Customer Drawing
							Rev. C