

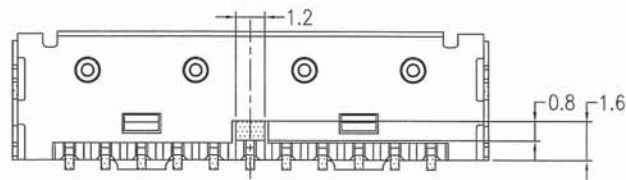
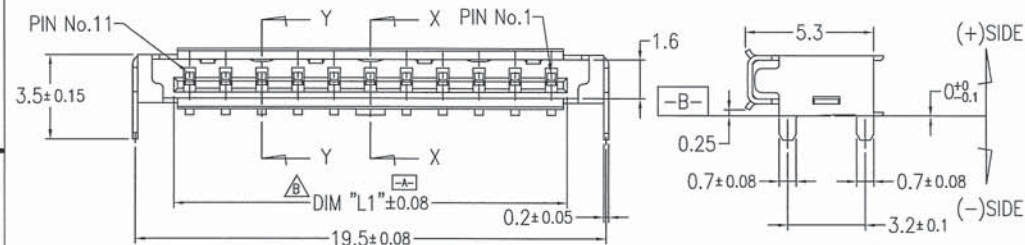


PRODUCT NO.	DIM "L1"	
10042856-4001	16.3	
10042856-4001LF	16.4	

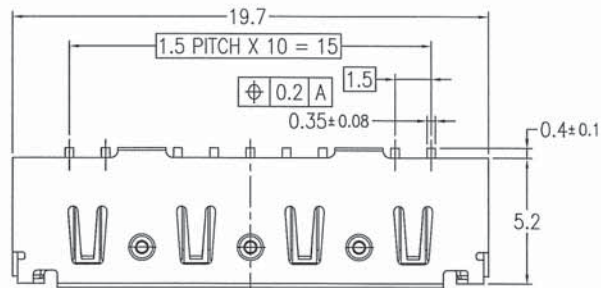


PCB 設置面

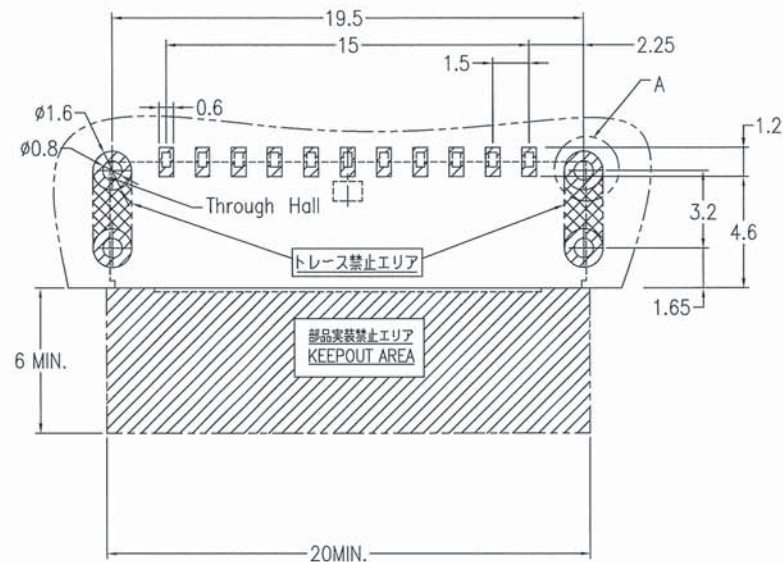

RECOMMENDED MOUNTING LAYOUT
TOLERANCE UNLESS OTHERWISE: ±0.1

NOTE

- 1.MATERIAL :
HOUSING :HIGH TEMPERATURE THERMOPLASTIC,UL94V-0
CONTACT :COPPER ALLOY(t=0.15)
METAL SHELL :COPPER ALLOY(t=0.2)
- 2.FINISH :
CONTACT :ALL OVER Ni 1.27μm MIN.
Au FLASH
METAL SHELL :ALL OVER Ni 1.27μm MIN.
Sn PLATING 1.27μm MIN.
- 3.GENERAL TOLERANCE : ±0.3
- 4.CO-PLANARITY : 0.1MAX



Detail A (Pin In Paste)
参考 はんだペースト塗布範囲
t = 150μm

mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406	ISO 1101	55UF OTHER	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		MM	title	sheet 2 of 2 size
A	RELEASED	J05-0402	Y.K	6/27/'05	angles	0.X ±0.3			
B	REVISED	J07-0184	Y.K	3/26/'07	linear	0.XX ±0.3	scale 5:1	MICRO CHANNEL CONNECTOR BOARD CONN. ASSY	A3
					0'±2'	0.XXX ±0.3			
					dr	Y.KAMEDA	3/26/'07	dwg no	
					enr	Y.KAMEDA	3/26/'07	10042856	
					chr	4/2/'07		type	
					appd	4/4/'07		Product Customer Drawing	
sheet	revision							Rev.	
index	sheet							B	

