
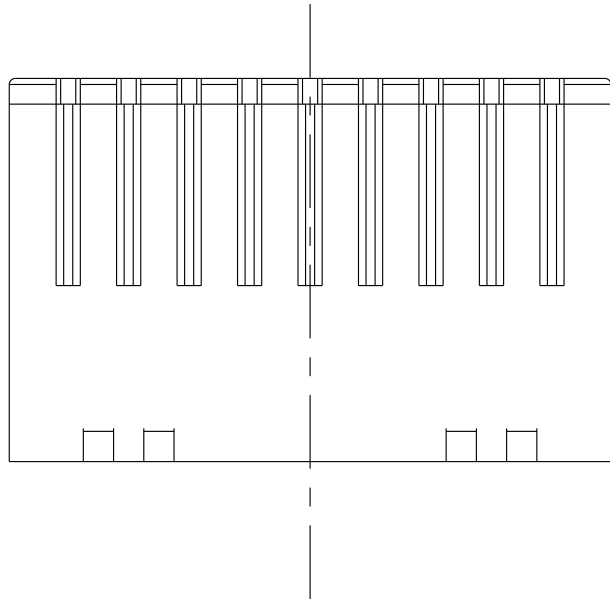
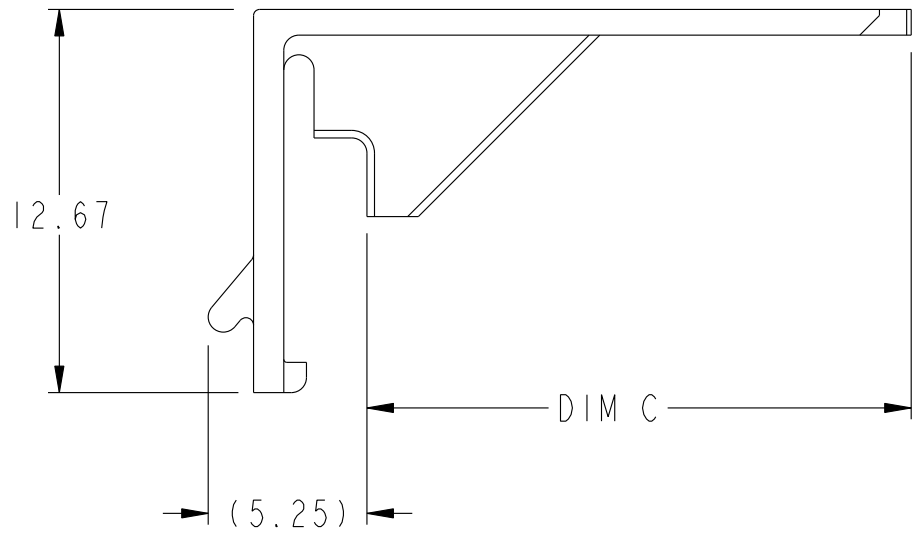
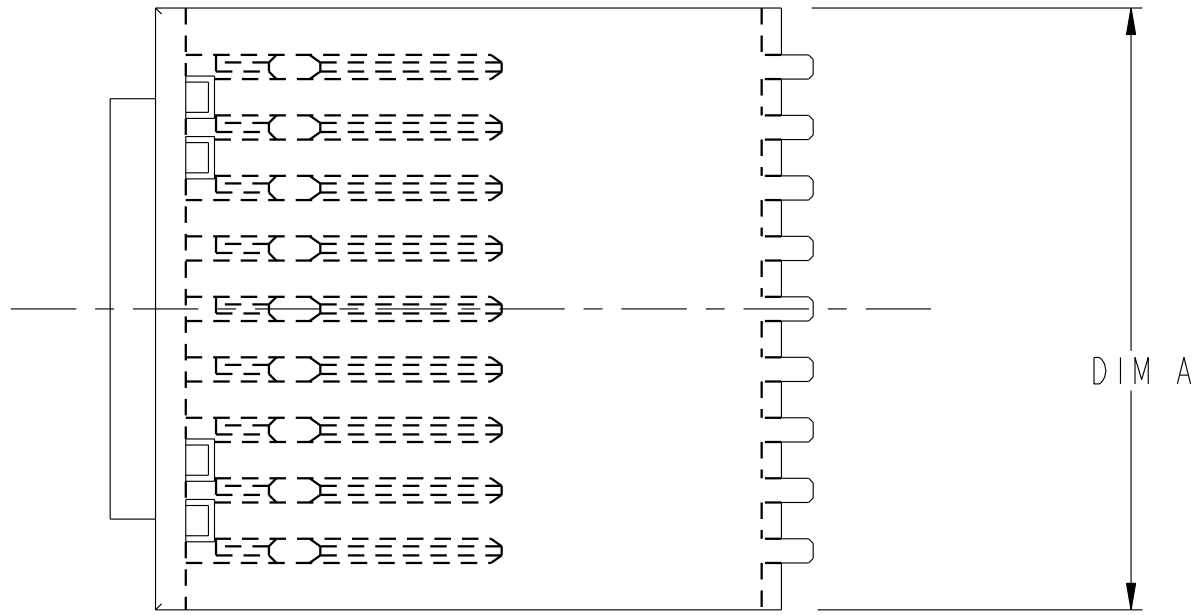



PRODUCT NUMBER
SEE TABLE, SHEET 2




Copyright FCI.


CONFIDENTIAL

www.fciconnect.com				surface - ASME Y14.5		tolerance std - ASME Y14.5		projection 		MM 		
				TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	T.HOUTZ	2005-11-01		ANGULAR	LINEAR	0.X ±0.3		size A2	Scale 4:1			
Eng	C. H. TAN	2006-06-05				0.XX ±0.10						
Chr	C. H. TAN	2007-06-04		0°	±2°	0.XXX ±0.050		ECN		***		
Appr	JOEY NG	2007-06-04		Product family				-	Spec ref -			
				title AirMax COVER				dwg no 10062848	Rev. B			
				R/A HDR & RECPT - 5pr, 2mm								
				catalog no					- CUSTOMER		sheet 1 of 2	

1		2		3	4	5	6	7	8
PART NUMBER (NOTE 3)		CONNECTOR GENDER	NUMBER OF IMLAS	DIM A	DIM C				
A	10062848-001LF	R/A HEADER	6	11.90	18.00				
	10062848-002LF	R/A HEADER	8	15.90	18.00				
	10062848-003LF	R/A HEADER	10	19.90	18.00				
B	10062848-004LF	R/A RECEPT.	6	11.90	23.45				
	10062848-005LF	R/A RECEPT.	8	15.90	23.45				
	10062848-006LF	R/A RECEPT.	10	19.90	23.45				

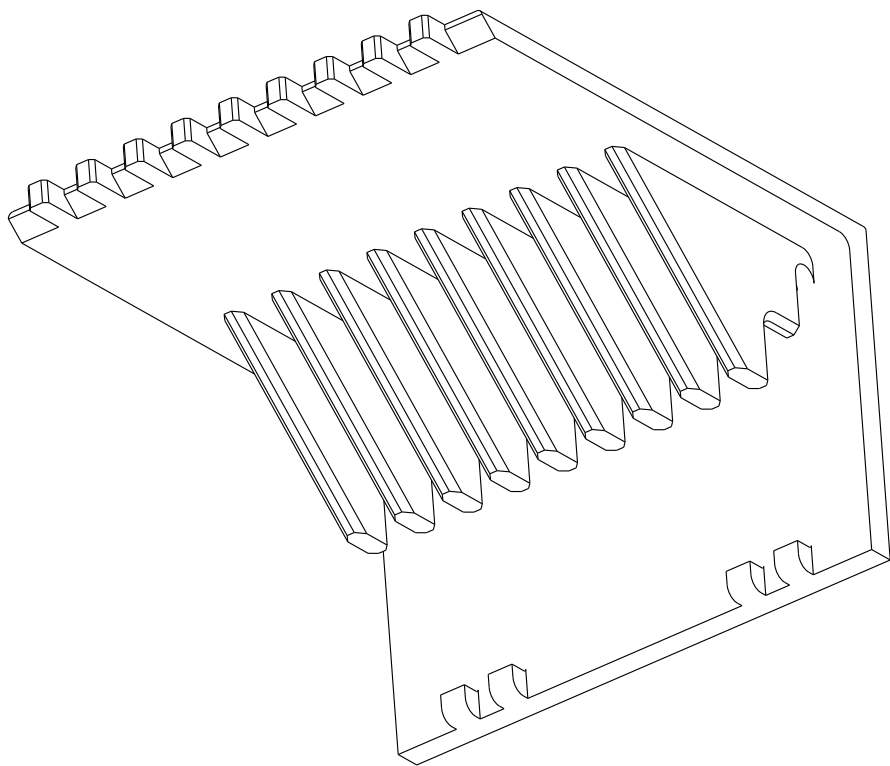

10062848-003LF SHOWN
SCALE 4:1

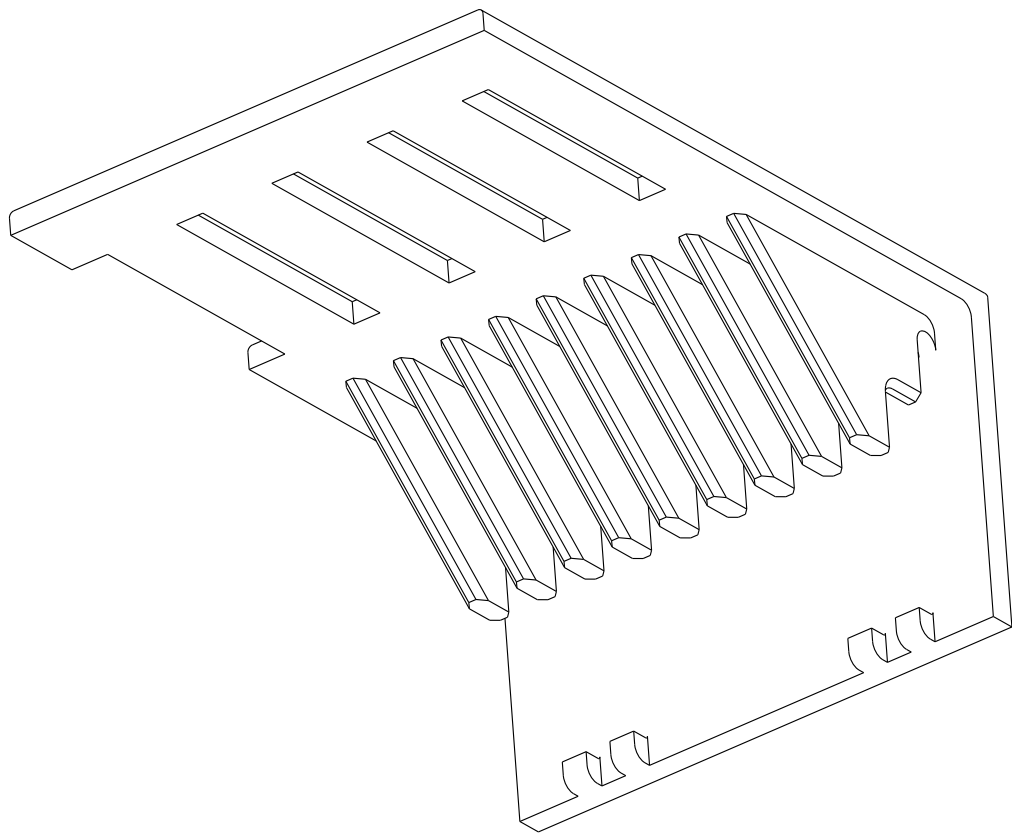

10062848-006LF SHOWN
SCALE 4:1

NOTES:

1. MATERIAL: THERMOPLASTIC RESIN
COLOR : BLACK,
UL94V-0 COMPLIANT,
MAXIMUM OPERATING TEMPERATURE
IS 105°C.
2. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED
TO A MANUFACTURING SOLDER PROCESS.
3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED
IN GS-22-008.
4. PACKAGING MEETS GS-14-920 LEAD FREE
LABELLING SPECIFICATION.

CONFIDENTIAL

FCJ	title	AirMax COVER	dwg no	10062848		Rev.	B
	R/A HDR & RECPT - 5pr, 2mm	catalog no		CUSTOMER	sheet 2 of 2		