
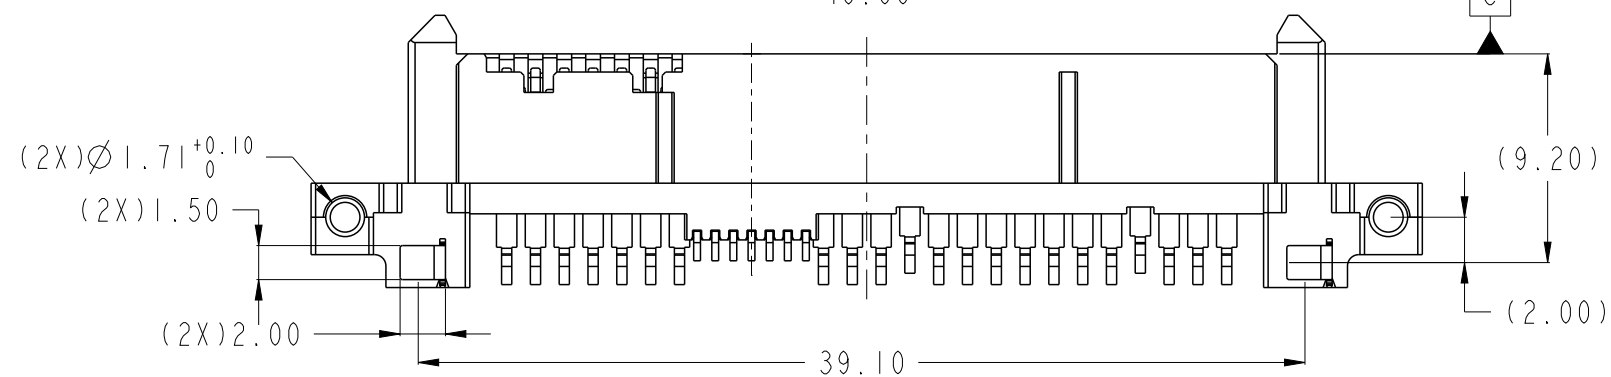
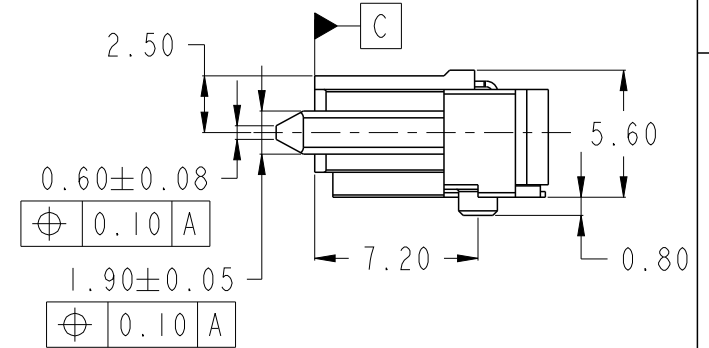
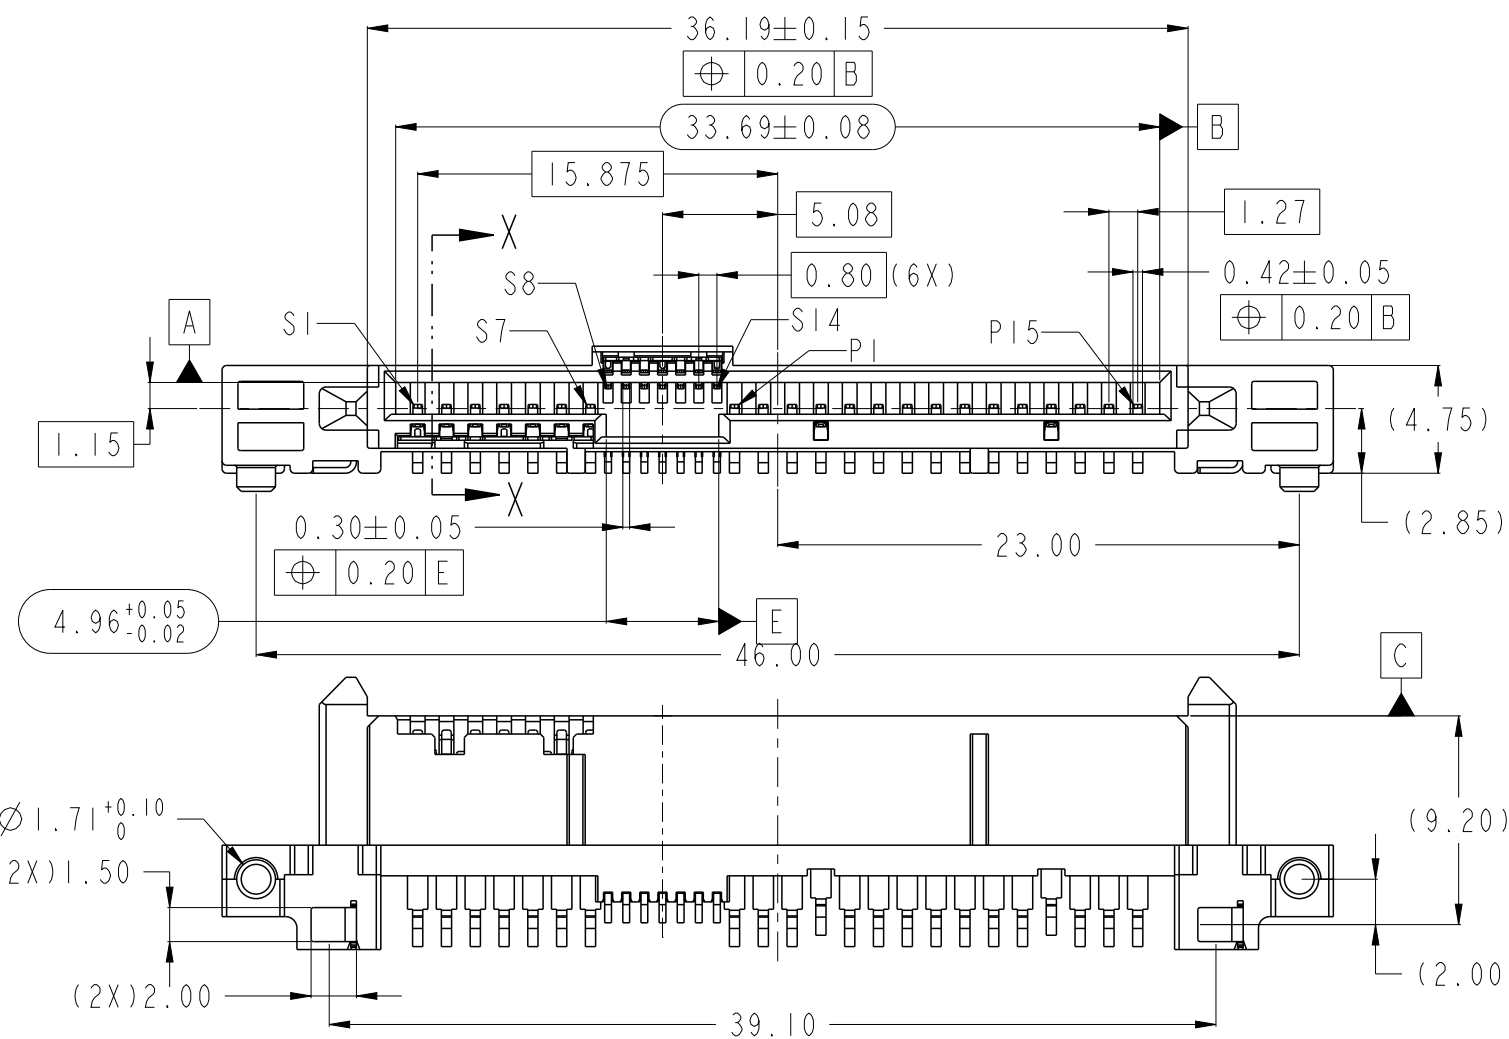
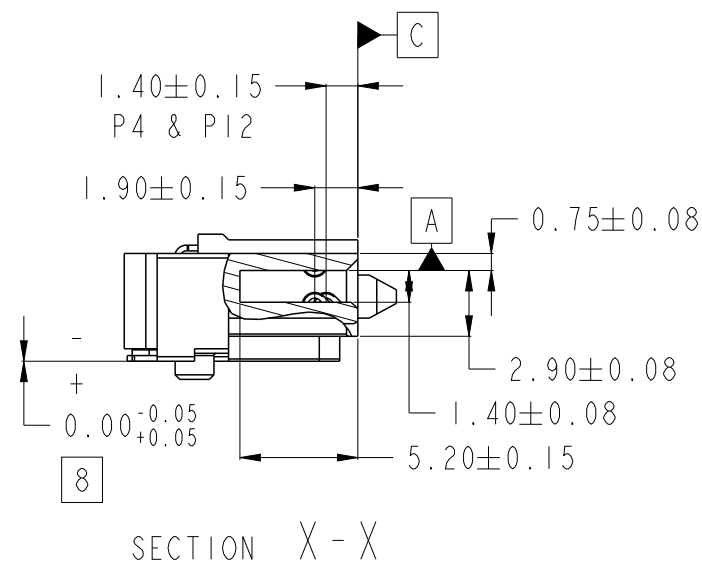



PRODUCT P/N
SEE TABLE, SHT 2

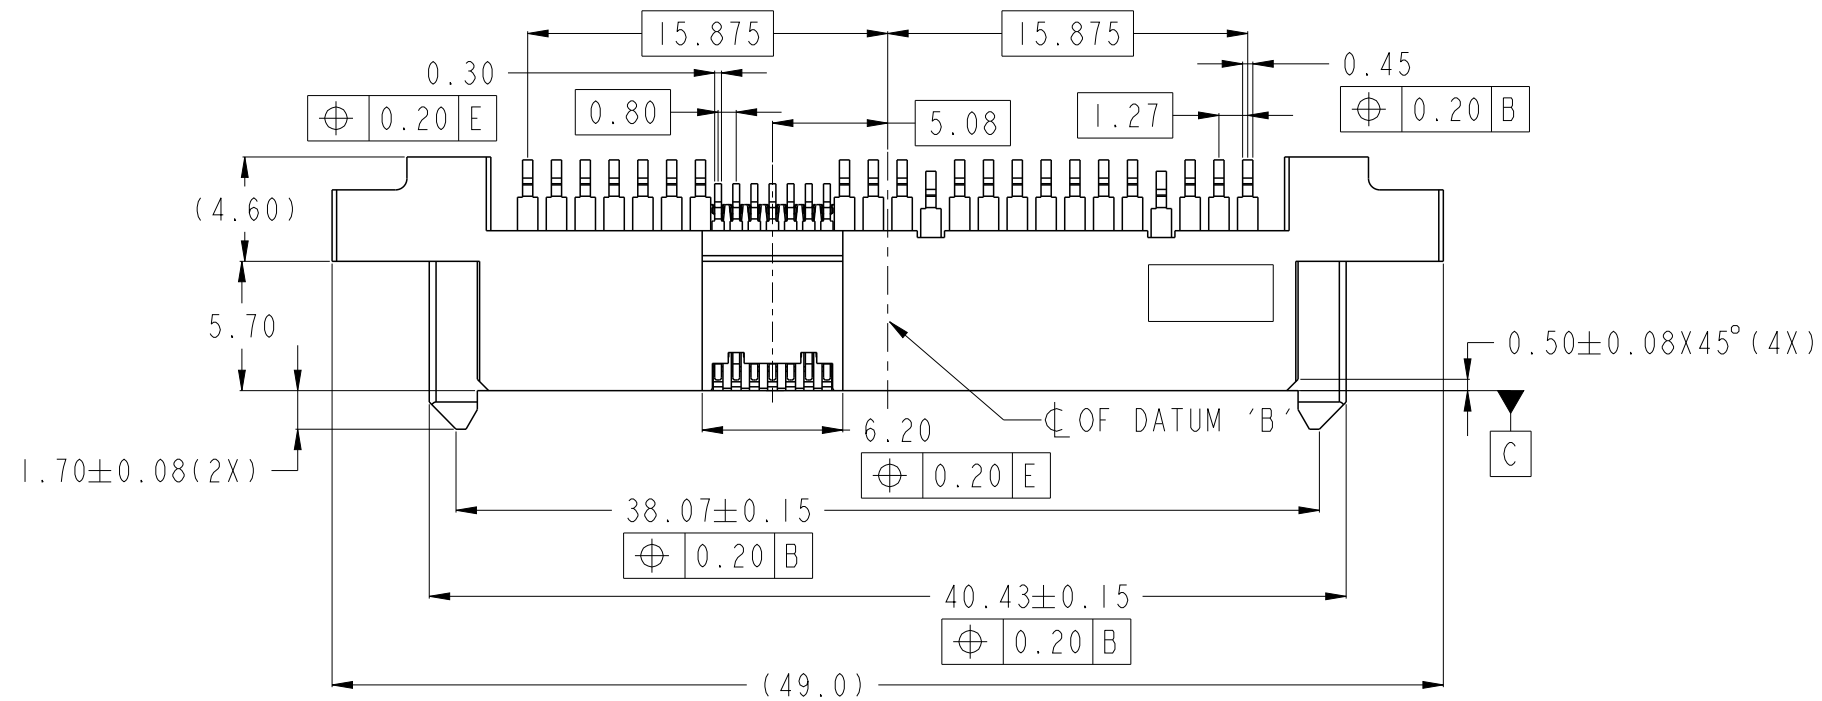


SCALE 3:1

spec ref	-	dr	Koon-Poh Tay	2015/04/08	projection	mm	size	A3	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Koon-Poh Tay	2015/06/09	chr	-	ecn no	-	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2015/06/09	product family	-	rel level	Released	rev	A
linear	0.X ±0.20 0.XX ±0.20 0.XXX ±-	angular	0° ±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 2	dwg no	10124274

PRODUCT P/N	PACKAGING
10124274-001LF	TRAY
10124274-001TRLF	TAPE & REEL

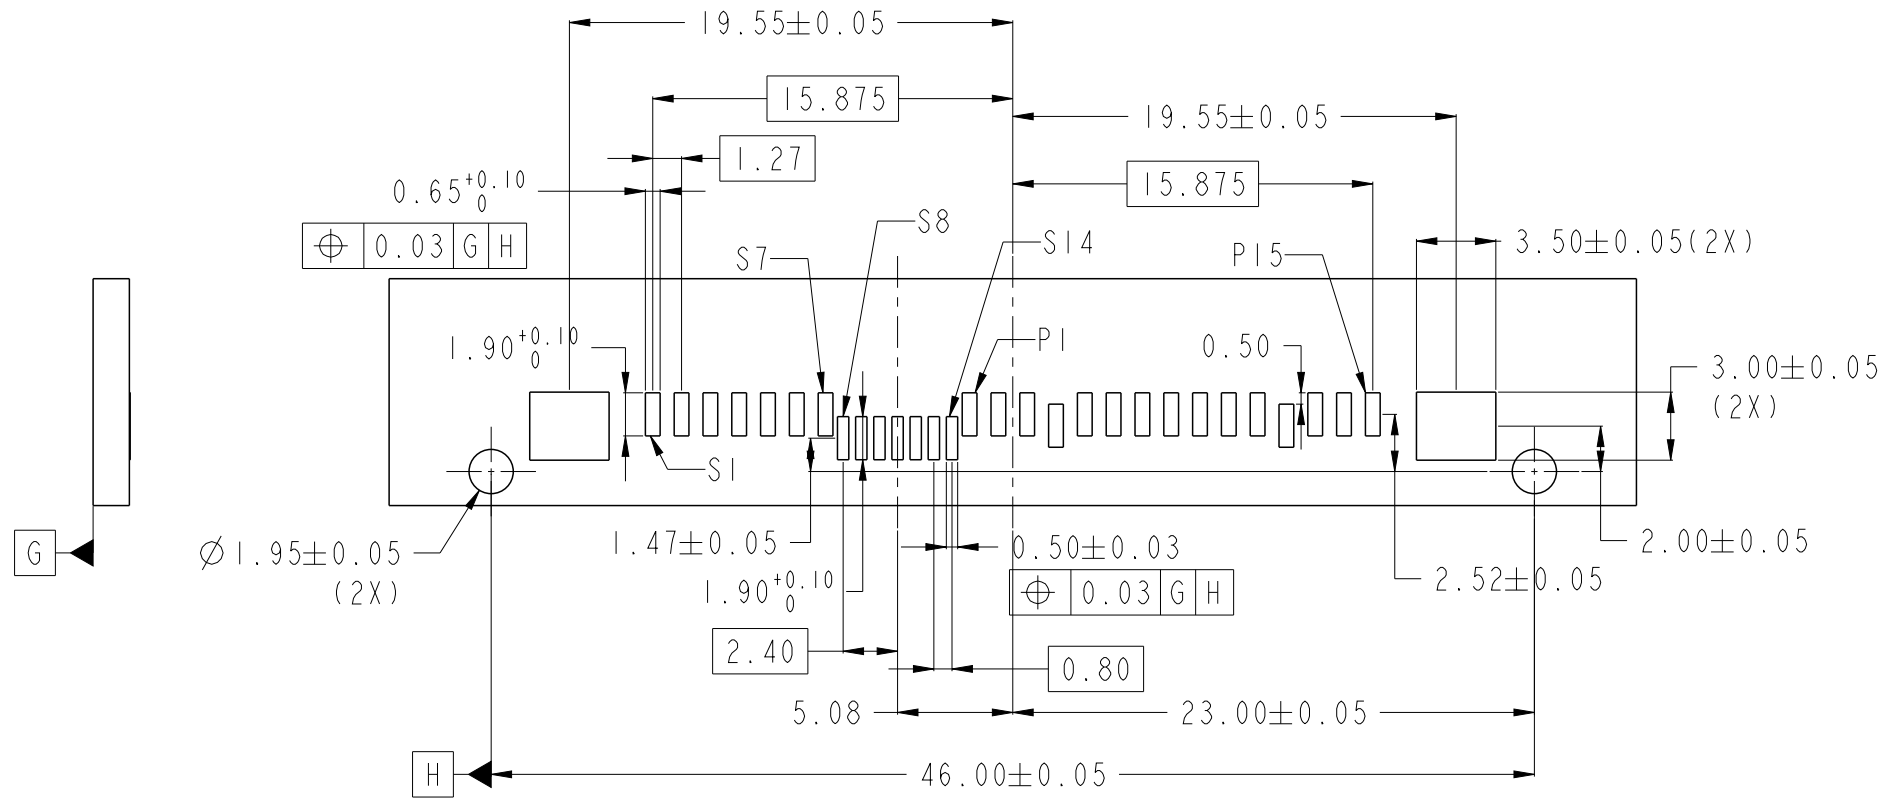

- NOTES:
- MATERIALS:
 - HOUSING: HIGH TEMP THERMOPLASTIC, UL 94V-0, COLOUR: BLACK
 - TERMINAL: COPPER ALLOY
 - HOLD DOWN: COPPER ALLOY
 - FINISH:
 - TERMINAL:
 - CONTACT POINT: 30u" MIN Au PLATING OVER 50u" MIN NICKEL
 - SOLDER TAIL: 100u" MIN TIN OVER 50u" MIN NICKEL
 - HOLD DOWN: 100u" MIN TIN OVER 50u" MIN NICKEL
 - THE STANDARD PACKAGING IS IN TRAY, UNLESS OTHERWISE SPECIFIED.
 - PRODUCT SPECIFICATION: GS-12-282
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
 - PART NUMBER ENDING IN "LF" DENOTES LEAD FREE.
 - ALL SOLDER TAIL MUST BE WITHIN 0.12MM MAX COPLANARITY.
 - A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

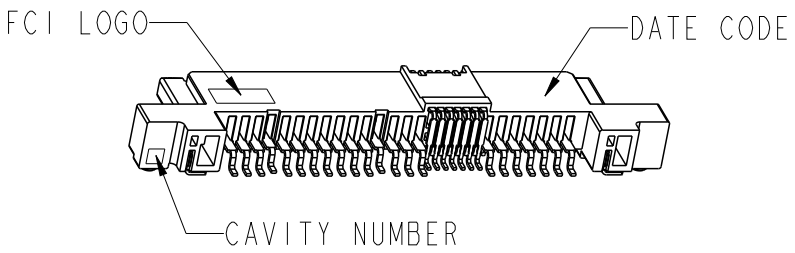

spec ref		-		dr	Koon-Poh Tay	2015/04/08	projection 	mm 	size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Koon-Poh Tay	2015/06/09			ecn no	-		
				chr	-	-			rel level Released			
				appr	Chen-Hong Tan	2015/06/09	product family		-			
surface  ISO 1302	linear	0.X	±0.20		title 12G SAS RECEPTACLE R/A SMT 2.85mm Z-HEIGHT			dwg no	10124274			rev A
		0.XX	±0.20									
		0.XXX	±-									
	angular	0°	±2°	www.fci.com	cat. no.		-	Product - Customer Drw			sheet 2 of 2	