

PRODUCT NUMBER
10126113-XYHLF

LEAD FREE OPTION
NOTE 1, 2, 7

NO. OF POS.
SEE TABLE

PIN PLATING

BASE P/N

DIM L

FULL R

.100
2.54
TYP

.015
0.38

POS. 1

POS. 2

POS. 3, ETC.

DETAIL J

.025/.64 □PIN
⊕ .020/0.51 (M) A (S) B (S)
AT TIP
BOTH ENDS

NOTE 5
DETAIL J
SCALE 16/1


.300
7.62
NOTE 4

13
3.3

NOTE 6

.386
9.80

DIM K
-A-

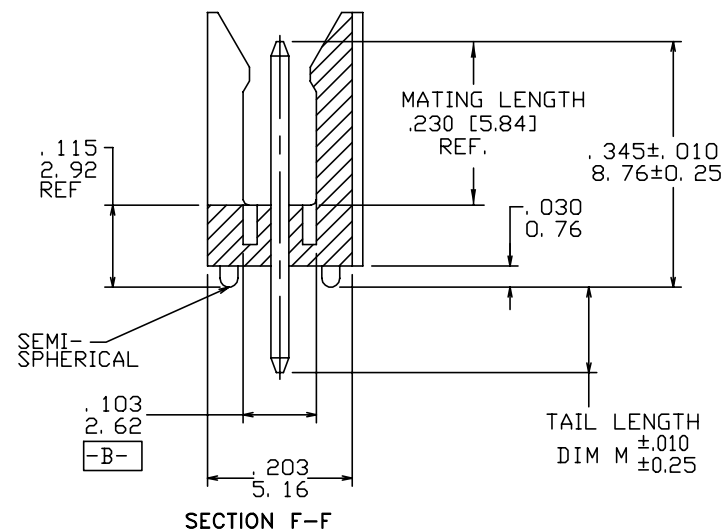

mat'l. code		surface	tolerance	projection	product family	
		ISO 1302 ✓	ISO 406 ISO 1101	⊕	HEADER	
l	tr	ec	n		title	
A	NEW	ZK	06/14/13	angles	FRICION LATCH HEADER	
				linear	SINGLE ROW VERTICAL	
				0°±2'	scale 4:1	
		dr	ZK HU 06/14/13	FCI	dwg no	
		engr	ZK HU 06/14/13		10126113	
		chr	RICK BIAN 06/14/13		sheet 1 of 2	
		appd	RICK BIAN 06/14/13		type Product Customer Drawing	
sheet	revision	A	A			
index	sheet	1	2			



Copyright FCI

PRODUCT NUMBER	NO OF PDS	DIM K	DIM L	TAIL LENGTH DIM M
10126113-X03	1 X 3	.300/7.62	.200/5.08	.120/3.05
10126113-X04	1 X 4	.400/10.16	.300/7.62	.120/3.05
10126113-X05	1 X 5	.500/12.70	.400/10.16	.120/3.05
10126113-X06	1 X 6	.600/15.24	.500/12.70	.120/3.05
10126113-X07	1 X 7	.700/17.78	.600/15.24	.120/3.05
10126113-X08	1 X 8	.800/20.32	.700/17.78	.120/3.05
10126113-X09	1 X 9	.900/22.86	.800/20.32	.120/3.05
10126113-X10	1 X 10	1.000/25.40	.900/22.86	.120/3.05
10126113-X11	1 X 11	1.100/27.94	1.000/25.40	.120/3.05
10126113-X12	1 X 12	1.200/30.48	1.100/27.94	.120/3.05
10126113-X13	1 X 13	1.300/33.02	1.200/30.48	.120/3.05
10126113-X14	1 X 14	1.400/35.56	1.300/33.02	.120/3.05
10126113-X15	1 X 15	1.500/38.10	1.400/35.56	.120/3.05
10126113-X43	1 X 3	.300/7.62	.200/5.08	.190/4.83

PIN PLATING CODES	
XXXXX-1YY	30u"/0.76u Au MIN. OVER 50u"/1.27u MIN Ni
XXXXX-2YY	15u"/0.38u Au MIN. OVER 50u"/1.27u MIN Ni

- NOTES:
1. PART NUMBER OPTIONS:
PIN PLATING CODES (SEE ABOVE)
LEAD FREE:
ADD 'HLF' AT THE END OF PART NUMBER FOR LEAD FREE
2. BODY MATERIAL:
GLASS REINFORCED PCT COLOR: BLACK
FLAME RETARDANT PER UL 94 V-0
MAXIMUM OPERATING TEMPERATURE: 130° C
OR
MINERAL FILLED LCP, COLOR BLACK
FLAME RETARDANT PER UL 94 V-0
- PART NUMBERS WITH 'H' SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- PART NUMBERS WITHOUT 'H' SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.
3. PIN MATERIAL: 3/4 HARD PHOS-BRONZE.
4. NO SLOTS ON 1 X 5 POSITION OR SMALLER PRODUCT. THE CENTER KEY SLOT WILL BE ON ALL HEADERS REGARDLESS OF SIZE.
5. TWO NON-CRITICAL SIDES OF PIN TIP NOT PLATED, BOTH ENDS
6. COMPANY LOGO MAY APPEAR IN THIS AREA.
7. THESE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family HEADER	
ltr ecn nodr date		tolerances unless otherwise specified		linear		INCH/MM		title	
A		angles		linear		scale 4:1		FRICION LATCH HEADER SINGLE ROW VERTICAL	
		0°±2'		linear				dwg no	
		dr		ZK HU		06/14/13		sheet 2 of 2	
		engr		ZK HU		06/14/13		size	
		chr		RICK BIAN		06/14/13		10126113	
		appd		RICK BIAN		06/14/13		A3	
sheet index		revision sheet						type Product Customer Drawing	