

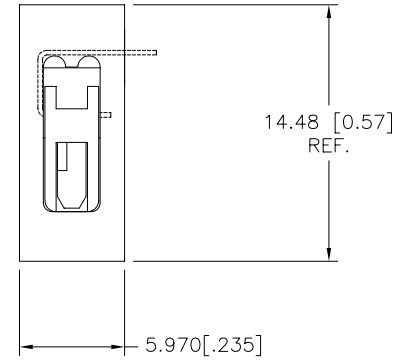


PRODUCT NO.
SEE SHT. 2

SIDE VIEW OF ASS'Y.
AFTER TERMINATION

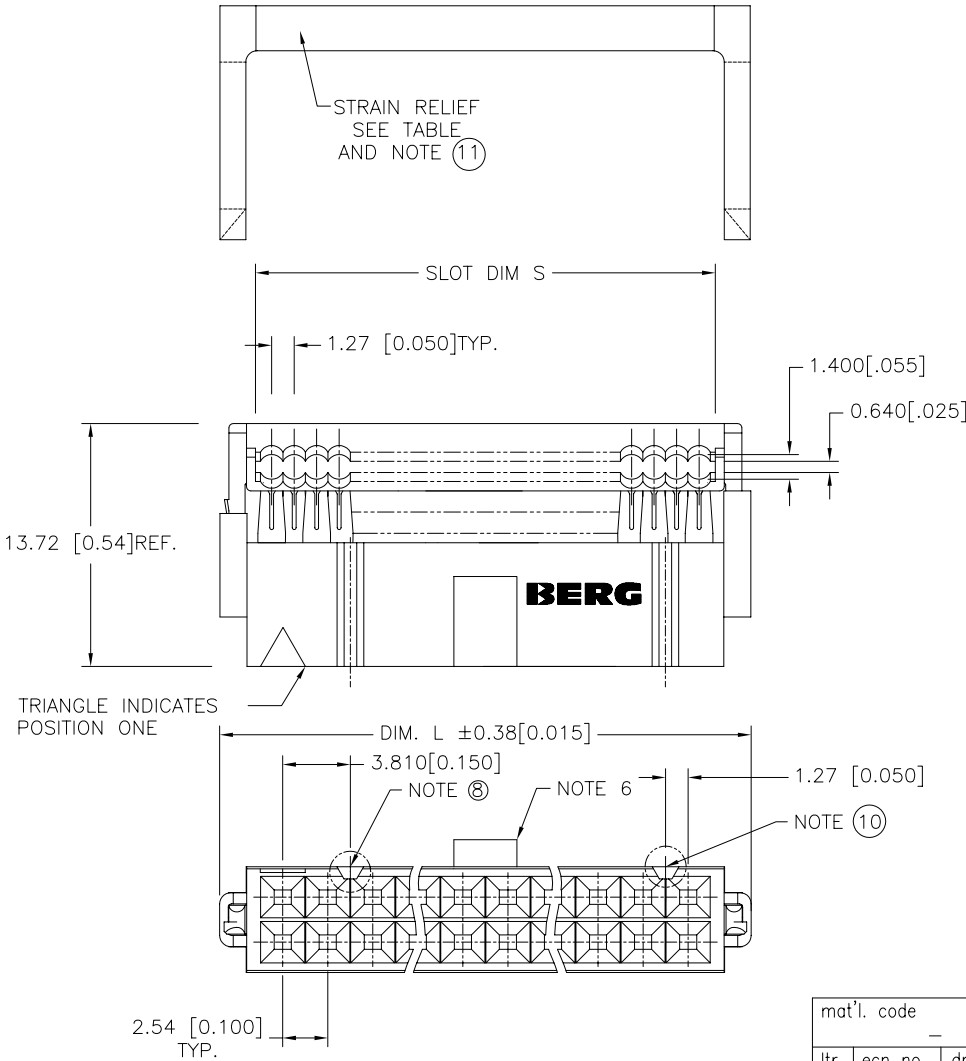

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com			
ltr	ecn no	dr	date				title	product family	code	
E	TRANSFER	RHA	11/23/81	linear	.XX ± 0.01 / .X ± 0.3	projection	QUICKIE L.P ASS'Y	QUICKIE	—	
F	RELEASED	BLI	1/82		.XXX ± 0.005 / .XX ± 0.13		STRAIN RELIEF			
G	5003	BLI	8/83	angles	.XXXX ± 0.0020 / .XXX ± 0.051					
H	N10816	CN	10/88	dr	0° $\pm 2^\circ$	MM/INCH				
J	V81770	RGD	10/2/98	enr		scale				
K	V90596	RGD	3/2/99	chr		1:1				
L	N05-0060	MHT	03/04/05	appd						
sheet index	revision sheet	L	L							
		1	2							

cage code
22526


PRODUCT NO.	SIZE	DIM "L"	DIM "S"	LEAD FREE OPTION
66564-X06	2x3	12.19/[.480]	8.128/[.320]	NOTE 13, 14
66564-X08	2x4	14.73/[.580]	10.668/[.420]	
66564-X10	2x5	17.27/[.680]	13.210/[.520]	
-X14	2x7	22.35/[.880]	18.290/[.720]	
-X16	2x8	24.89/[.980]	20.830/[.820]	
-X20	2x10	29.97/[1.180]	25.910/[1.020]	
-X26	2x13	37.59/[1.480]	33.530/[1.320]	
-X34	2x17	47.75/[1.880]	43.690/[1.720]	
-X40	2x20	55.37/[2.180]	51.310/[2.020]	
-X50	2x25	68.07/[2.680]	64.010/[2.520]	
66564-X60	2x30	80.77/[3.180]	76.710/[3.020]	

X	COVER		POL. KEY	STR REL.	
	STYLE	ENTRY			
5	THRU	DUAL	NO	NO	SEE NOTE 12
6	THRU	DUAL	NO	NO	SEE NOTE 11
7	THRU	DUAL	YES	NO	SEE NOTE 11
8	THRU	DUAL	YES	YES	
9	THRU	DUAL	NO	YES	

KEY

NOTES:

1. TERMINAL MAT'L: PHOS BRONZE, FULL HARD, ALLOY UNS-C51000.
2. TERMINAL PLATING: 0.7u/30u" GOLD IN CONTACT AREA OVER 1.27u 50u" NICKEL. REMAINDER OF TERM. 1.27u 50u" NICKEL.
3. MOLDING MAT'L: BASE AND COVER- GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0: COLOR- BLUE
4. CONNECTOR ASS'YS PACKAGED IN TUBES THEN BOXED IN LOTS OF 100.
5. THE FIRST TWO CAVITY POSITIONS AND THE LAST TWO ARE IDENTIFIED BY NUMBER
6. POLARIZING FEATURE OPTIONAL, SEE TABLE.
7. MOLDING MAT'L: STRAIN RELIEF- UNFILLED THERMOPLASTIC, FLAME-RETARDANT: UL 94 V-0: COLOR-BLUE.
8. THE POLARIZING FEATURE ON THIS END IS NON EXISTENT ON 6,8,10, AND 14 POS. CONNECTORS.
9. 10 POSITION CONNECTOR NOT AVAILABLE WITH BOTH POL. SLOTS AND KEY.
10. THE POLARIZING FEATURE ON THIS END IS NON EXISTENT ON 6 AND 8 POS. CONNECTORS.
11. THE PRODUCT NUMBERS 66564-6XX AND 66564-7XX ONLY COUNT FOR 2x3 AND 2x4 POS. CONNECTORS FOR ALL OTHER VERSIONS WITHOUT STRAIN RELIEF (2x5---2x30) REFER TO P/N 66900
12. PRODUCT NUMBER 66564-506 ONLY WITHOUT BERG LOGO.
13. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
14. THESE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
15. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

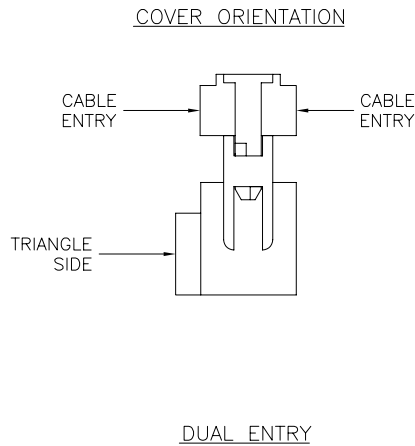

mat'l. code				—				tolerances unless otherwise specified				CUSTOMER COPY		A FCI www.fciconnect.com							
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3				projection 	title QUICKIE L.P. ASS'Y STRAIN RELIEF											
L					.XXX ±.005/.XX±.13																
					.XXXX ±.0020/.XXX±.051																
				angles	0° ±2°				MM/INCH  scale 1:1	product family QUICKIE				code							
				dr	R.G Draggoo		10/2/98			size dwg no		—									
				engr	M. SYMK		10/2/98			A 66564											
				chr	M. SYMK		10/2/98														
				appd	M. SYMK		10/2/98														
sheet index		revision sheet																			