
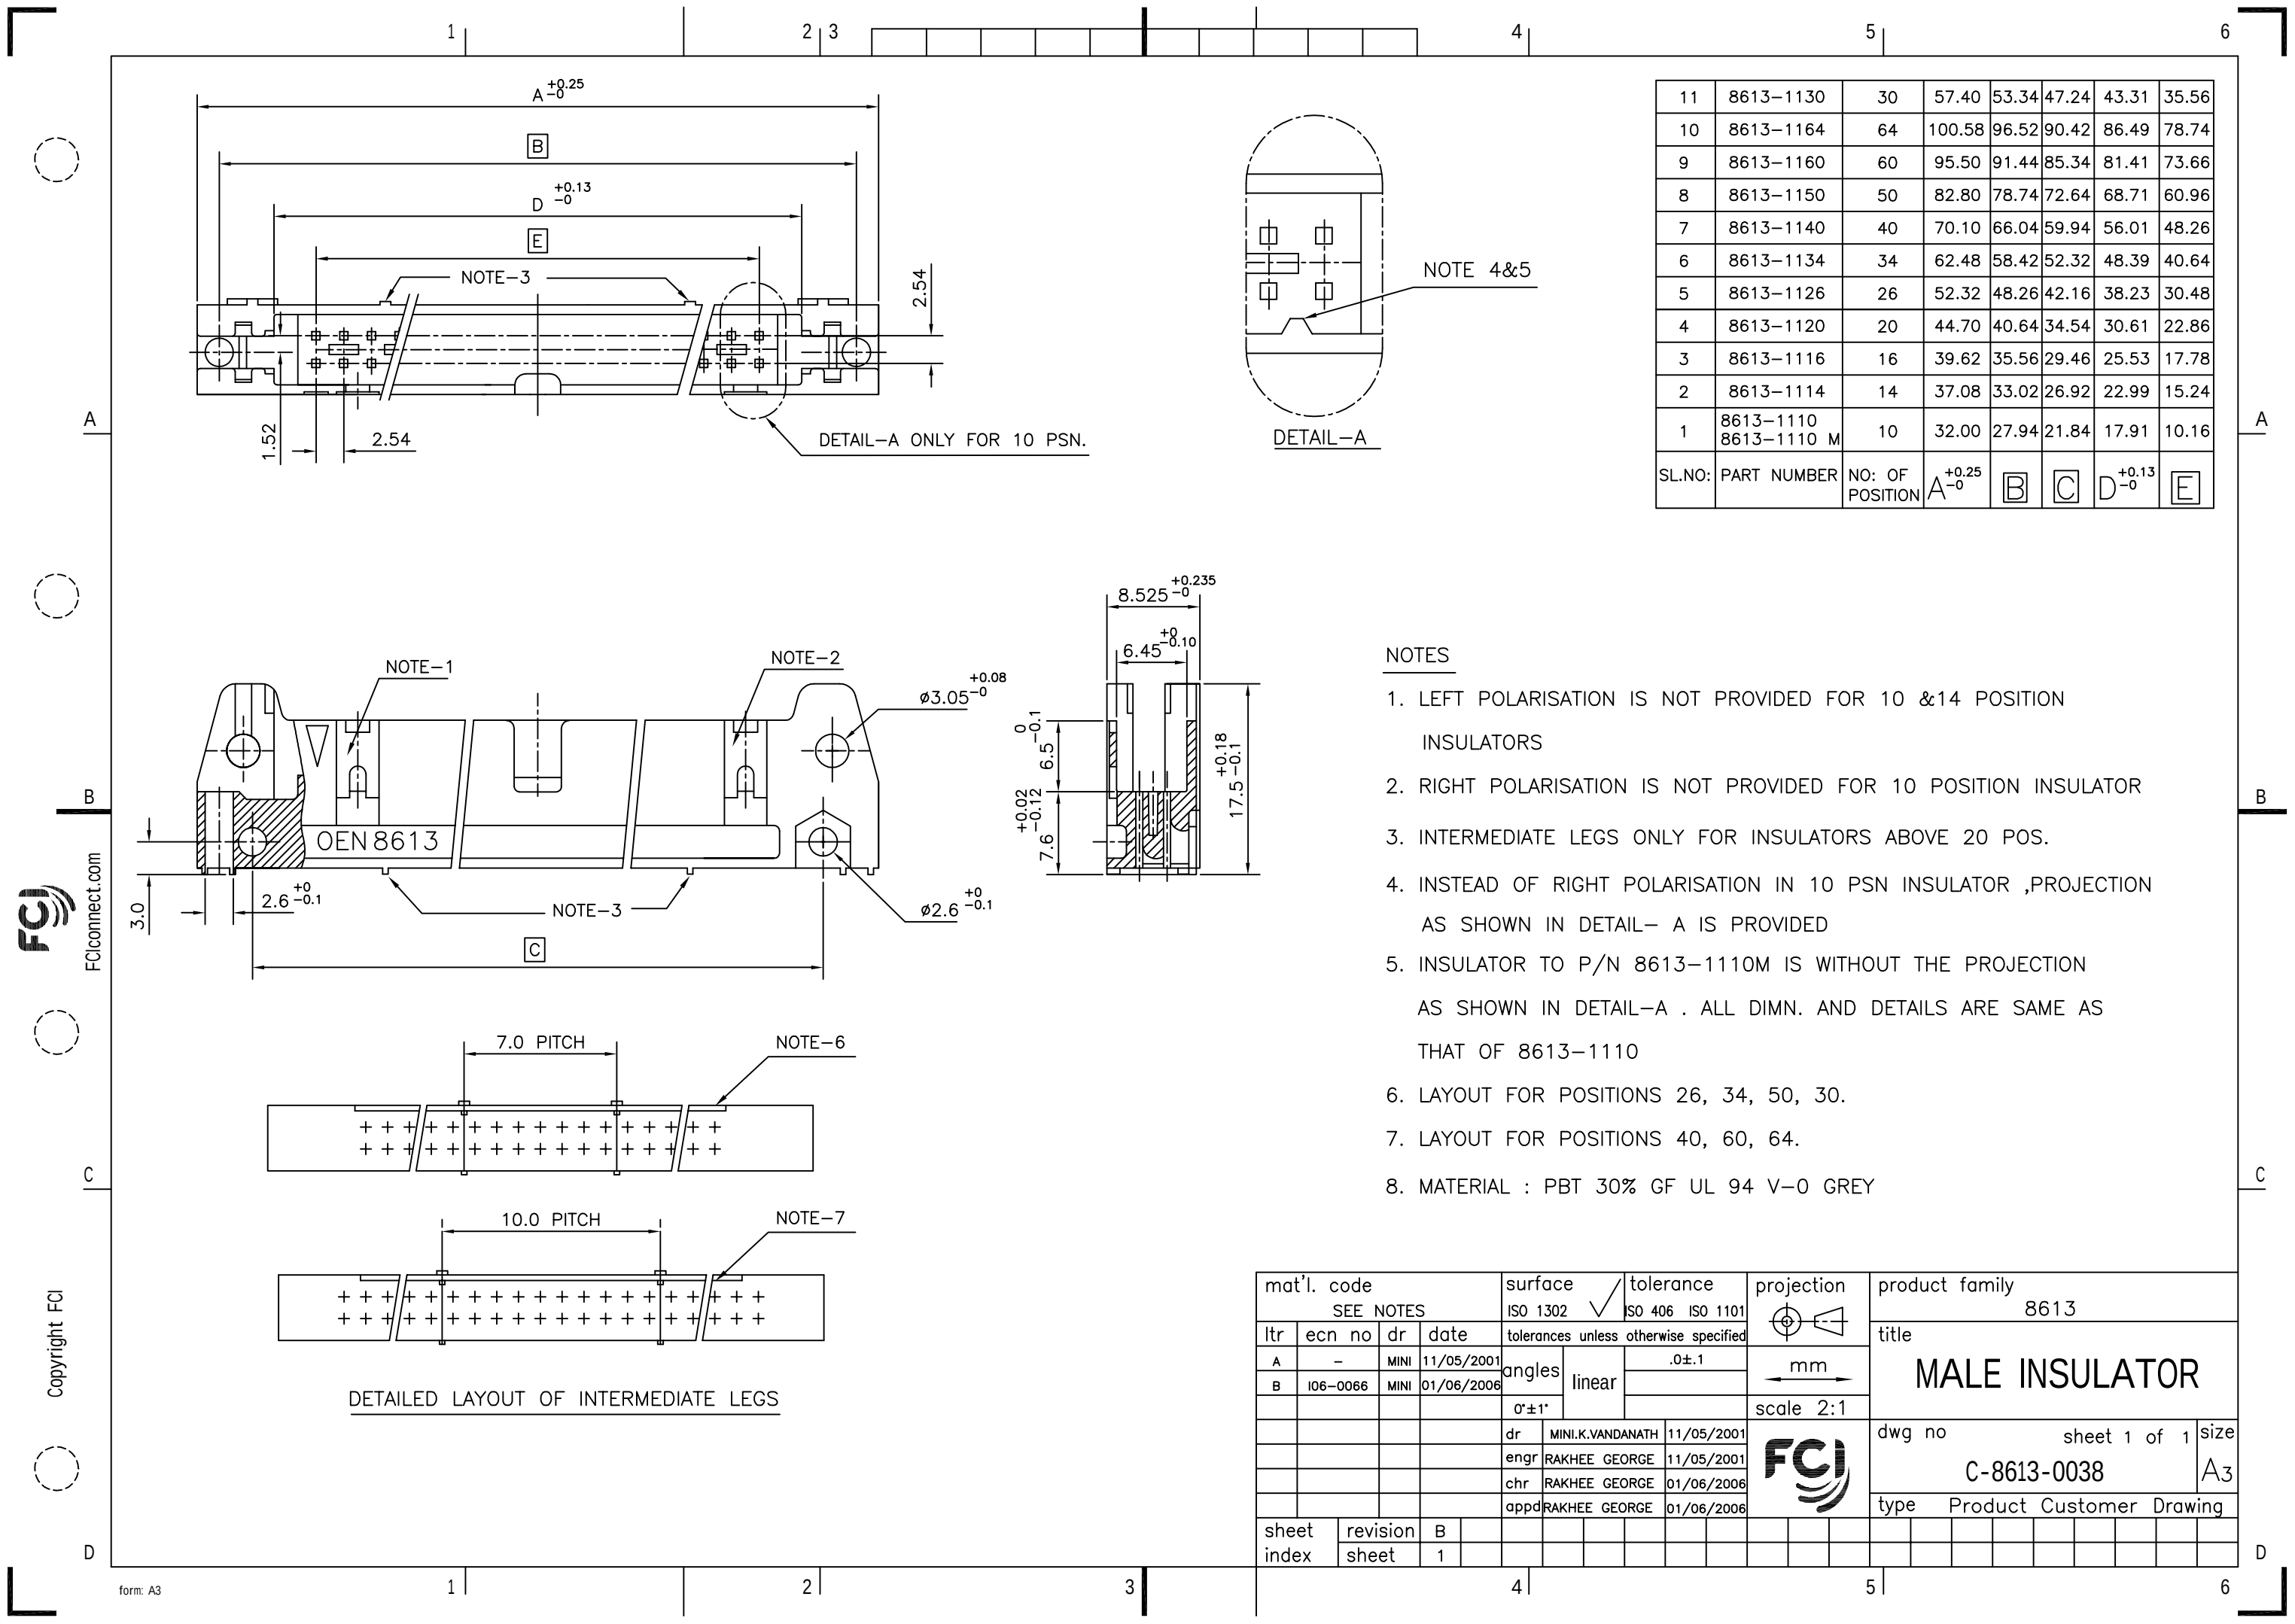





11	8613-1130	30	57.40	53.34	47.24	43.31	35.56
10	8613-1164	64	100.58	96.52	90.42	86.49	78.74
9	8613-1160	60	95.50	91.44	85.34	81.41	73.66
8	8613-1150	50	82.80	78.74	72.64	68.71	60.96
7	8613-1140	40	70.10	66.04	59.94	56.01	48.26
6	8613-1134	34	62.48	58.42	52.32	48.39	40.64
5	8613-1126	26	52.32	48.26	42.16	38.23	30.48
4	8613-1120	20	44.70	40.64	34.54	30.61	22.86
3	8613-1116	16	39.62	35.56	29.46	25.53	17.78
2	8613-1114	14	37.08	33.02	26.92	22.99	15.24
1	8613-1110 8613-1110 M	10	32.00	27.94	21.84	17.91	10.16
SL.NO:	PART NUMBER	NO: OF POSITION	A ^{+0.25} ₋₀	B	C	D ^{+0.13} ₋₀	E

- NOTES
1. LEFT POLARISATION IS NOT PROVIDED FOR 10 &14 POSITION INSULATORS
 2. RIGHT POLARISATION IS NOT PROVIDED FOR 10 POSITION INSULATOR
 3. INTERMEDIATE LEGS ONLY FOR INSULATORS ABOVE 20 POS.
 4. INSTEAD OF RIGHT POLARISATION IN 10 PSN INSULATOR ,PROJECTION AS SHOWN IN DETAIL- A IS PROVIDED
 5. INSULATOR TO P/N 8613-1110M IS WITHOUT THE PROJECTION AS SHOWN IN DETAIL-A . ALL DIMN. AND DETAILS ARE SAME AS THAT OF 8613-1110
 6. LAYOUT FOR POSITIONS 26, 34, 50, 30.
 7. LAYOUT FOR POSITIONS 40, 60, 64.
 8. MATERIAL : PBT 30% GF UL 94 V-0 GREY

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 8613					
ltr	ecn	no	dr	date	tolerances unless otherwise specified				title MALE INSULATOR						
A	-		MINI	11/05/2001	angles	linear	.0±.1								
B	106-0066		MINI	01/06/2006											
					0°±1°										
					dr	MINI.K.VANDANATH 11/05/2001			dwg no		sheet 1 of 1		size		
					enr	RAKHEE GEORGE 11/05/2001			C-8613-0038		A3				
					chr	RAKHEE GEORGE 01/06/2006									
					appd	RAKHEE GEORGE 01/06/2006									
sheet index		revision sheet		B	1										