

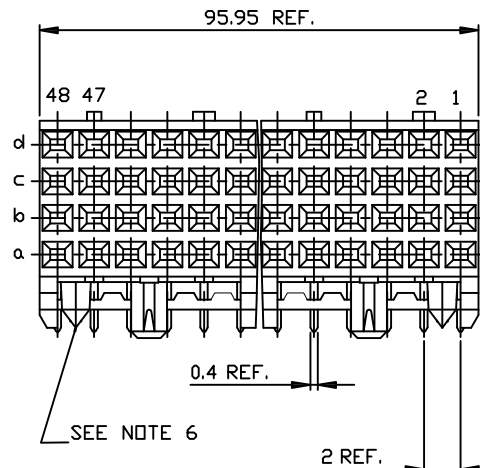
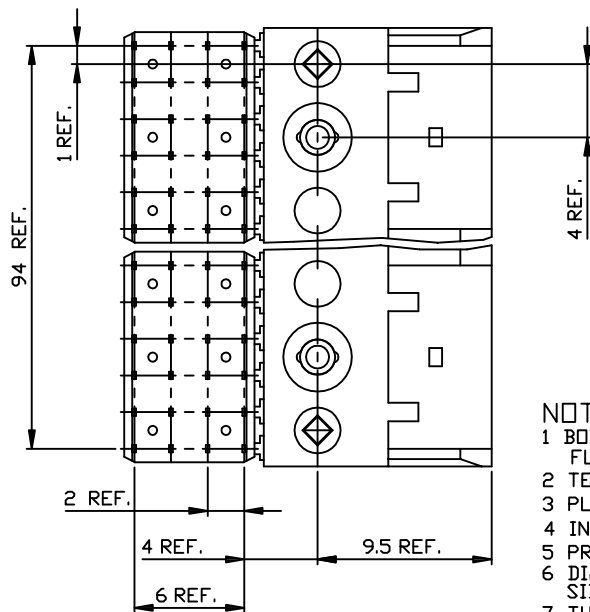


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM'A"
89038-X01/X01LF	1.6	2.90
89038-X11/X11LF	2.4	3.53

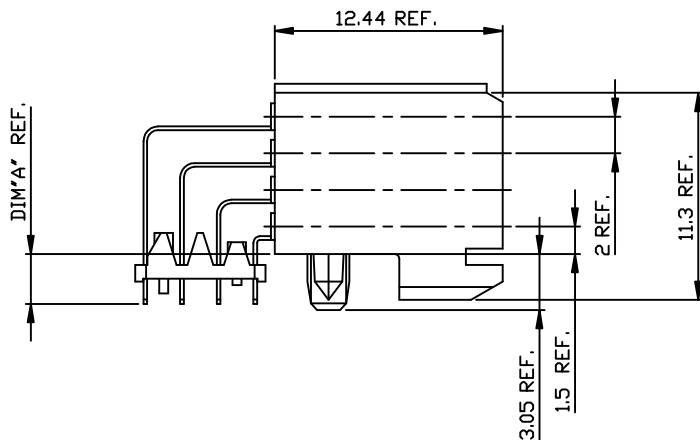


PRODUCT AFTER PC BOARD APPLICATION.

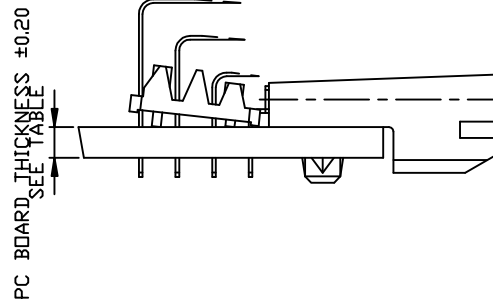

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 μm PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH T. SIDES OF PRODUCT
- 7 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 8 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

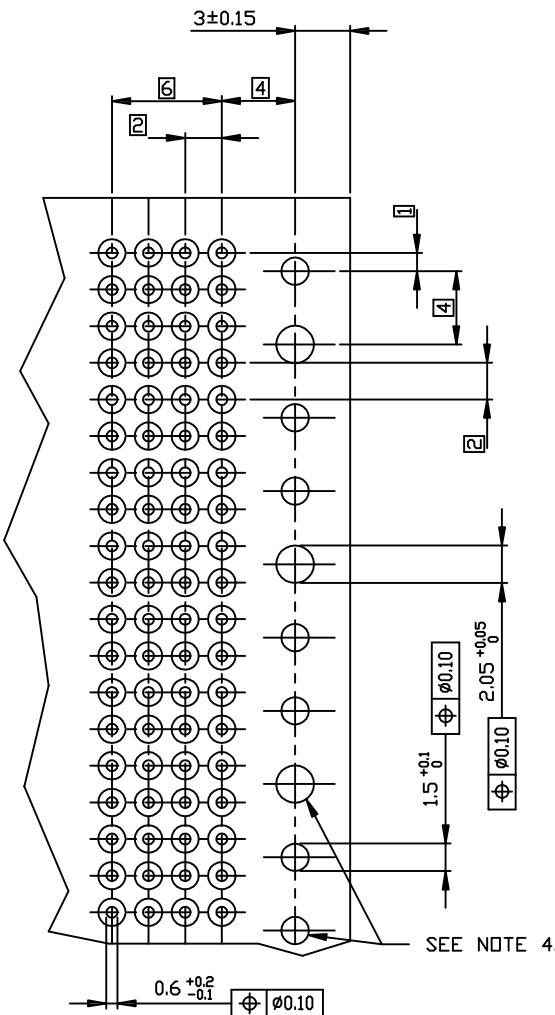

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
l	tr	ec	n	dr	date	linear	projection
J	0004-0004	CLW	041221				
K	0006-0470	CenH	11/23/06				
L	0007-0071	CenH	05/25/07				
M	0008-0071	TER	8/26/08	dr	H.Bouknecht	930202	
				engr	H. Bouknecht	940311	
G	V00578	LLA	000316	chr	S.Lee	930203	
H	V00847	LLA	000530	appd	J.Vintjes	930203	
sheet	revision	M	M	M			
Index	sheet	1	2	3			




PDM: Rev:M

STATUS: Released


Printed: Nov 14, 2008

All rights strictly reserved. Reproduction or use in any form without written authority from the proprietor.
 Tous droits strictement réservés. Reproduction ou utilisation en quelque forme que ce soit sans autorisation écrite du propriétaire.
 © F C I bv


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
89038-X02/X02LF	1.6	2.90
89038-X12/X12LF	2.4	3.53

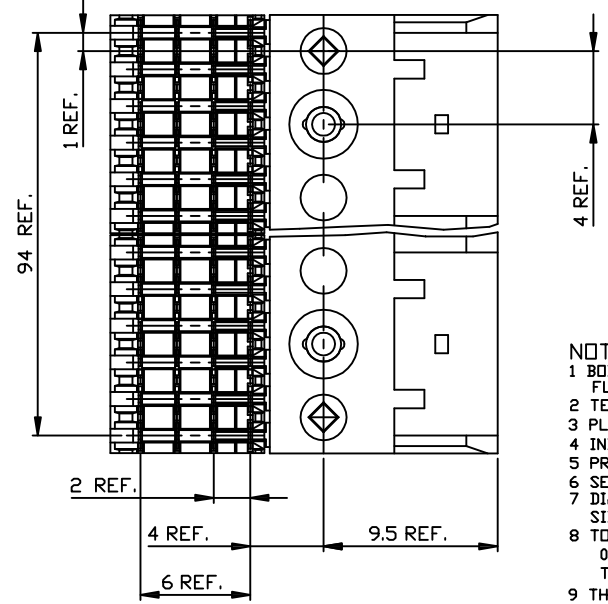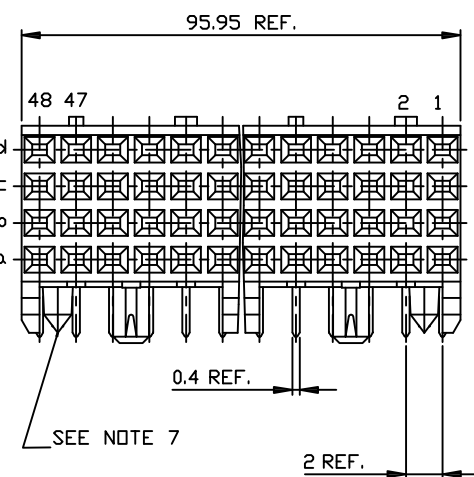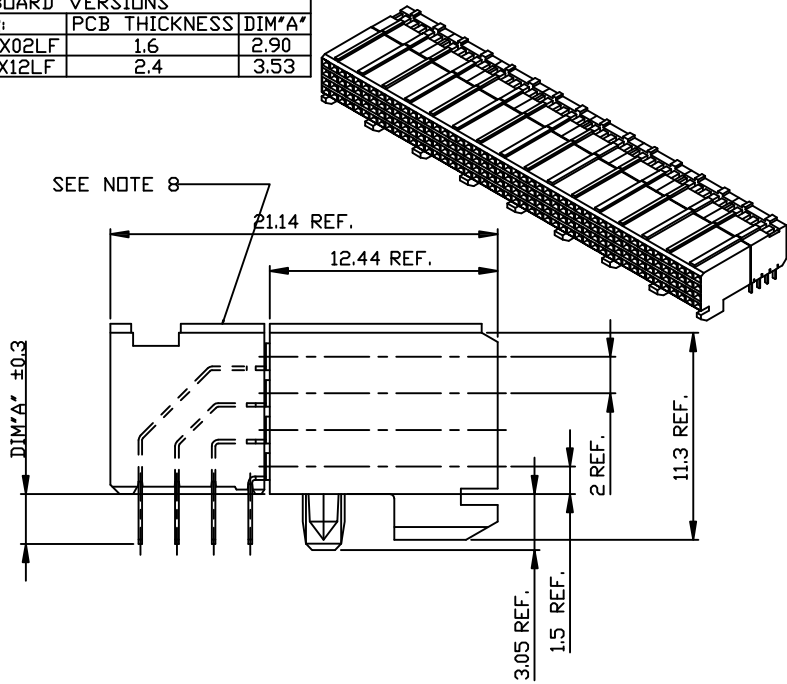

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL:
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL
-9YY/9YYLF	TELCORDIA CO

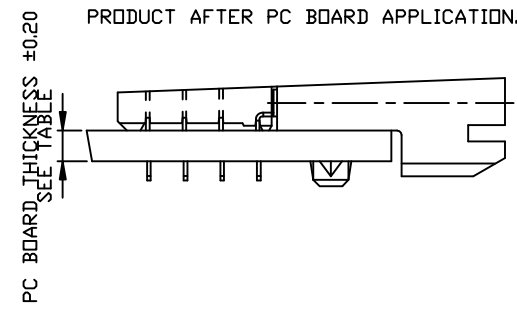

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 μm PURE Sn
 - 4 INDICATED HOLES ARE UNPLATED.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK.
 - 7 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
 - 8 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - 9 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

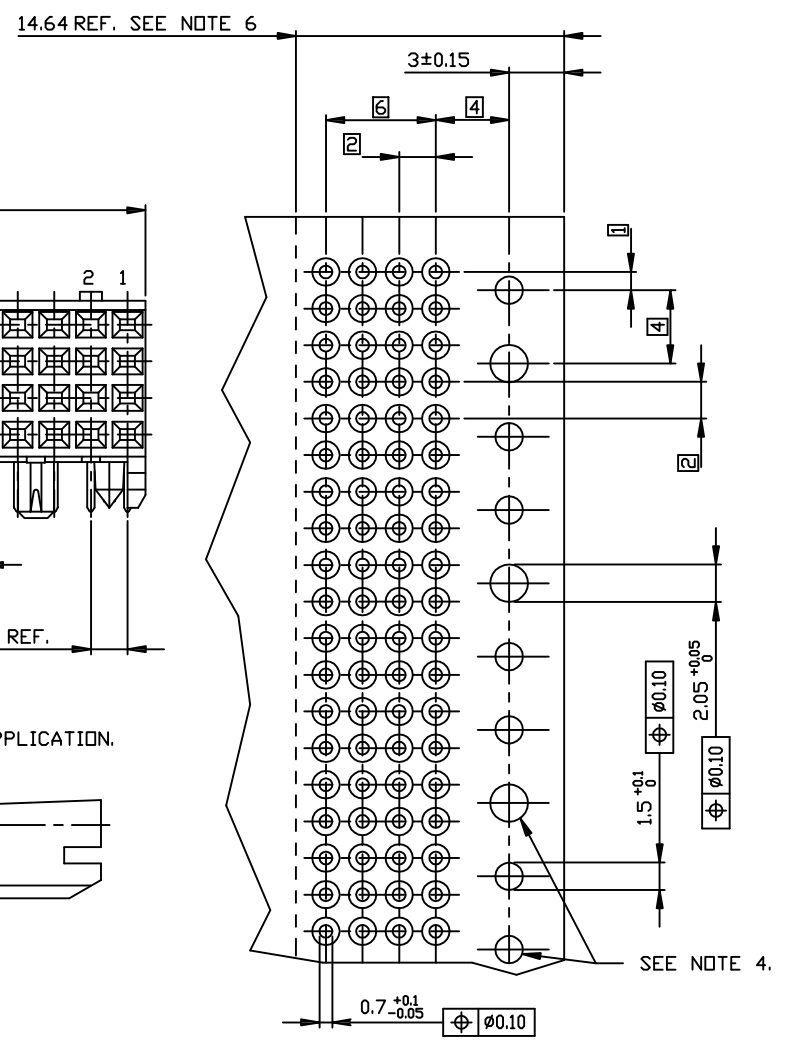




RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnection.com	
l	tr	ec	n	o	d	r	date		
linear				projection		title			
angles						RA FEMALE SIGNAL			
						96 mm PRESS PEG			
dr		J. de Bl		970529		product family		METRAL(tm)	
engr		P. Schalk		970529		size dwg no		code	
chr		P. Schalk		970529		A2		213	
app		H. Coolmans		970529		89038		sheet	
sheet		revision						2 of ~	
Index		sheet							


 All rights strictly reserved. Reproduction or lease to third parties in any form without the express written consent of the proprietor.
 Property of F.C.I. Inc.

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
 Propriété de F.C.I. Inc.

© F.C.I. Inc.

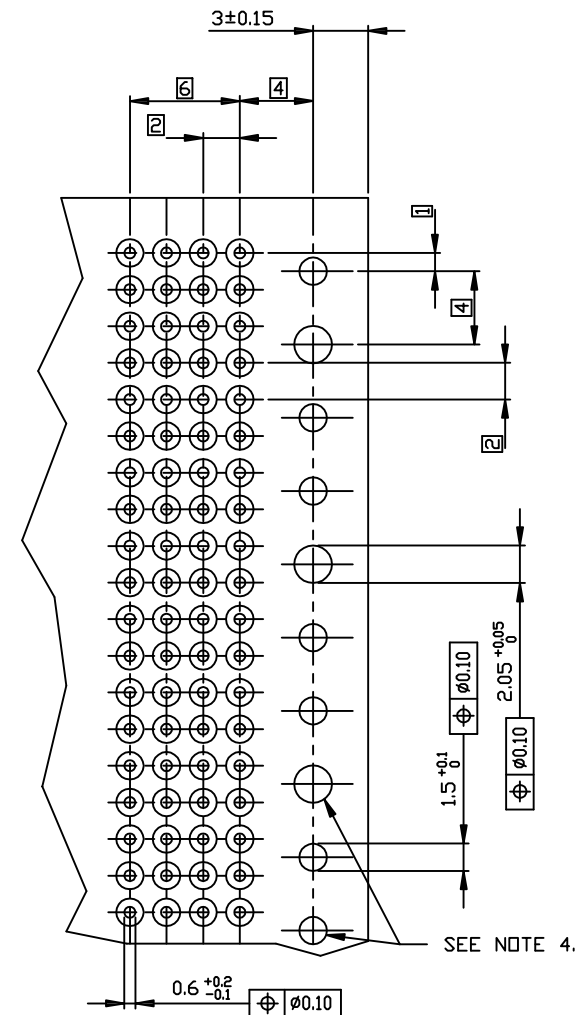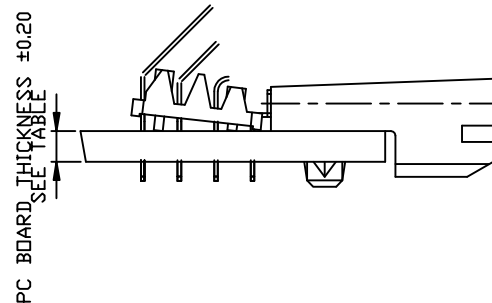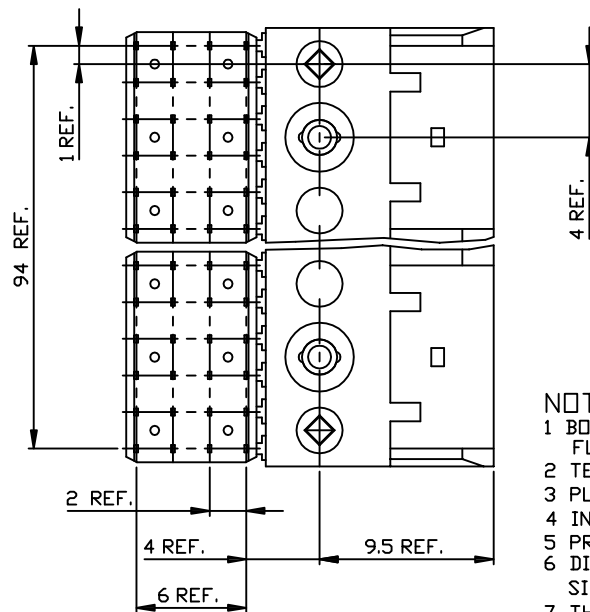

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 μm PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
- 6 DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH
SIDES OF PRODUCT.
- 7 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 8 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER
APPLICATION.

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnection.com	
ltr ecn nodr date				linear				projection		title	
H				angles						RA FEMALE SIGNAL 96 mm PRESS PEG	
				dir Heaven Cen 11/23/06 engr Collins Lu 11/23/06 chr Beer Fu 11/23/06 appd Joseph Hala 11/23/06						product family METRAL(tm)	
								scale 5:1		code 213	
								size A2		sheet 3 of-	
sheet revision											
Index sheet											