
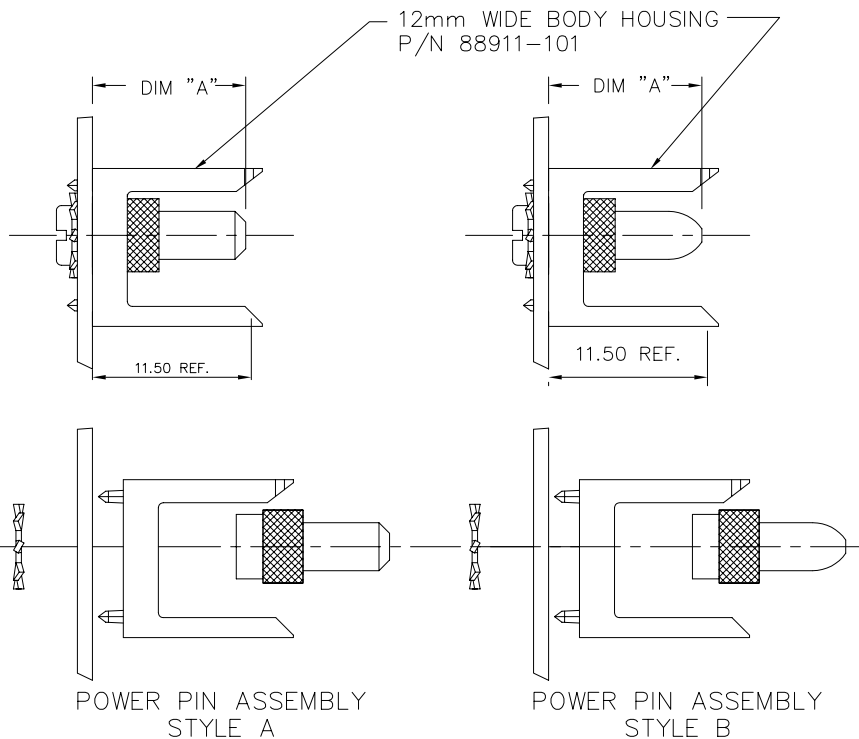


PRODUCT NUMBER
SEE TABLE--SHEET 2

-0YY	COMES WITH A BRASS SLOTTED PAN HEAD SCREW W/NICKEL PLATING	NOTE 4
-1YY	COMES WITH A STAINLESS STEEL COMBO PAN HEAD SCREW	NOTE 2

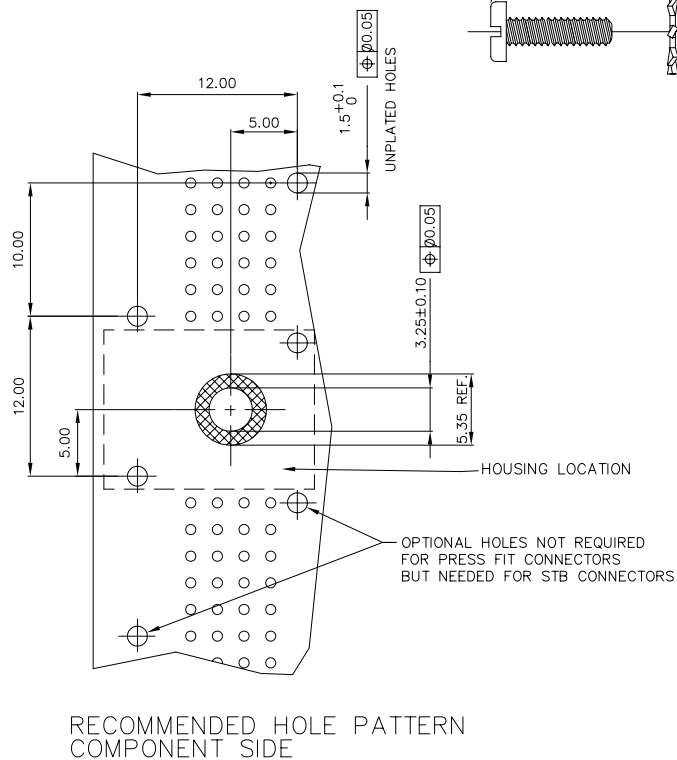

mat'l. code				surface		tolerance	projection	product family		
				ISO 1302		ISO 406 ISO 1101		METRAL ACC.		
ltr	ecm	no	dr	date	tolerances unless otherwise specified			title		
J	v94312	MDF	11/04/99		angles	linear	XX ±.01/.3	POWER PIN ASSEMBLY		
K	v94406	HTB	12/01/99				xxx ±.005/.13	12 mm		
L	v00746	LSS	3/06/00		0°±2'		xxxx ±.0020/.050	scale 1:1		
M	v01293	JWS	6/01/00	dr	STU STONER	12/12/91		dwg no		
N	v12634	EPK	11/09/01	enr	R. DOUTRICH	12/12/91		91570		
P	M05-0202	MHT	9/23/05	chr	STU STONER	12/12/91		sheet 1 of 2		
R	M06-0286	MNR	7/27/06	appd	STU STONER	12/12/91		size		
sheet				revision	R	R		A3		
index				sheet	1	2		type Product Customer Drawing		

form: A3



FCIconnect.com

Copyright FCI

PRODUCT NUMBER	DIM "A"±0.10	SCREW LENGTH	PIN TIP	NOTES	LEAD FREE OPTION
91570-X01	11.50	7.92	STYLE A		NOTE 5 ↓
91570-X02	32.00	7.92	STYLE A	NOTE 3	
91570-X03	13.00	7.92	STYLE A	NOTE 3	
91570-X04	14.50	7.92	STYLE A	NOTE 3	
91570-X05	16.00	7.92	STYLE A	NOTE 3	
91570-X06	24.00	7.92	STYLE A	NOTE 3	
91570-X07	28.90	7.92	STYLE A	NOTE 3	
91570-X08	32.00	12.70	STYLE A	NOTE 3	
91570-X09	14.50	12.70	STYLE A	NOTE 3	
91570-X10	16.00	12.70	STYLE A	NOTE 3	
91570-X11	11.50	12.70	STYLE A		
91570-X12	32.00	12.70	STYLE B	NOTE 3	
91570-X13	14.50	12.70	STYLE B	NOTE 3	
91570-X14	11.50	12.70	STYLE B		
91570-X15	32.00	7.92	STYLE B	NOTE 3	
91570-X16	14.50	7.92	STYLE B	NOTE 3	
91570-X17	16.00	7.92	STYLE B	NOTE 3	
91570-X18	24.00	7.92	STYLE B	NOTE 3	
91570-X19	16.00	12.70	STYLE B	NOTE 3	
91570-X20	11.50	7.92	STYLE B		
91570-X21	28.90	7.92	STYLE B	NOTE 3	
91570-X22	13.00	7.92	STYLE B	NOTE 3	

NOTE 5

NOTES:

1. HOUSING SHOWN FOR APPLICATION CLARITY AND DOES NOT COME WITH POWER PINS AND PAN HEAD SCREWS
2. TORQUE RATING FOR #4 STAINLESS STEEL COMBO PAN HEAD SCREW TO BE 5 IN/LBS. MAX
3. MUST BE USED WITH THE METRAL(tm) PASS-THRU POWER CONTACT P.N. 91877
4. TORQUE RATING FOR #4 BRASS SLOTTED PAN HEAD SCREW TO BE 3.75 IN/LBS. MAX.
5. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

-0YY	COMES WITH A BRASS SLOTTED PAN HEAD SCREW W/NICKEL PLATING	NOTE 4
-1YY	COMES WITH A STAINLESS STEEL COMBO PAN HEAD SCREW	NOTE 2

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
R					angles linear XX ±.01/.3 XXX ±.005/.13 XXXX ±.0020/.050		POWER PIN ASSEMBLY 12 mm
					dr STU STONER 12/12/91	scale 1:1	dwg no
					enrg R. DOUTRICH 12/12/91		91570
					chr STU STONER 12/12/91		sheet2 of 2
					appd STU STONER 12/12/91		A3
sheet index	revision sheet						type Product Customer Drawing

form: A3