
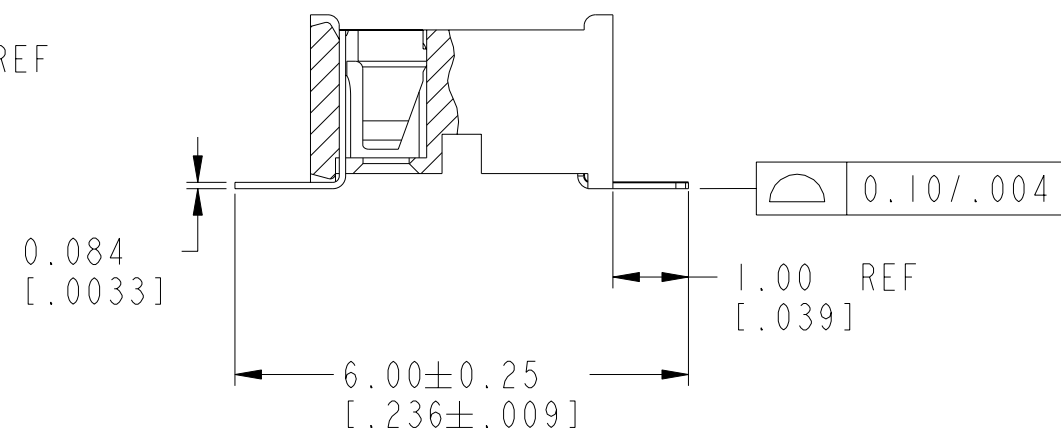
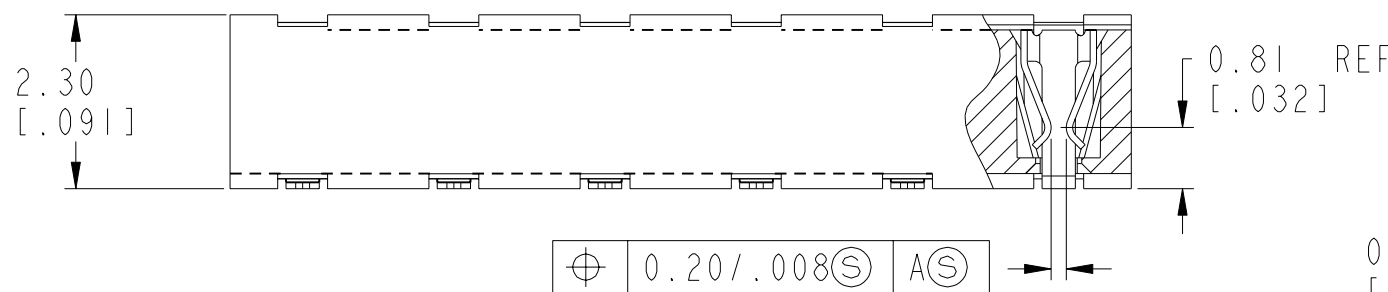
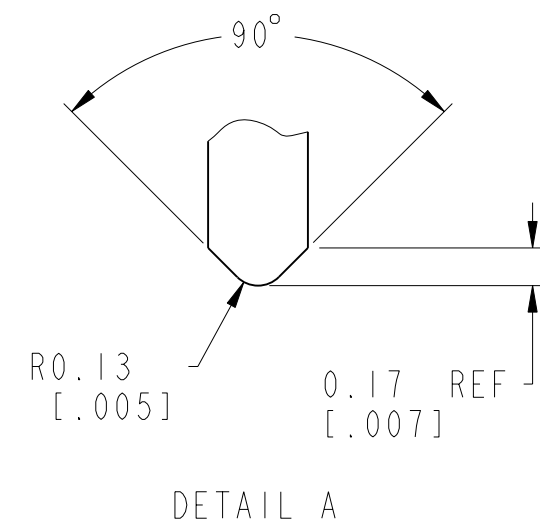


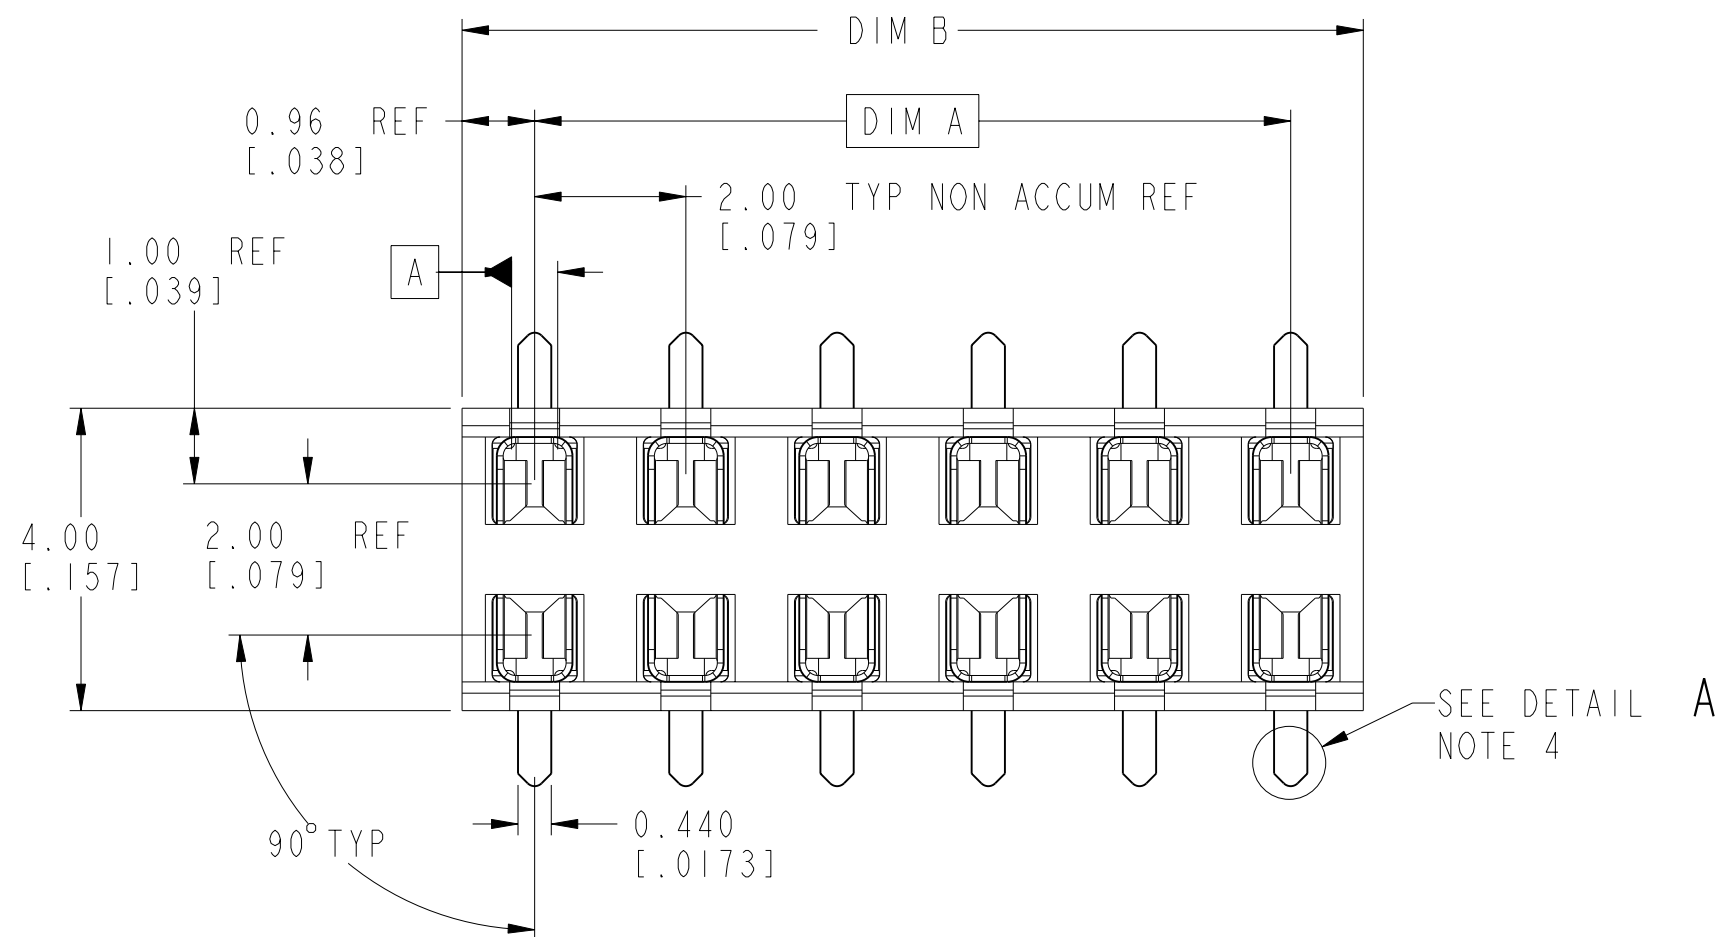

CONFIDENTIAL

rev	ecn no	dr	date
P	S50184	BSL	1995-09-19
R	S60082	BSL	1996-03-26
S	S70073	BSL	1997-03-25
T	V94400	BSL	1999-12-01
U	S05-0059	KBM	2005-04-20
V	S09-0253	NBR	2009-08-25
W	S10-0136	NBR	2010-06-28

www.fciconnect.com			surface - ✓ ISO 1302		tolerance std ISO 406 ISO 1101		projection 	MM / INCH
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	BS LOW	2000-01-06	ANGULAR	LINEAR	0.X	±0.3	size A3	Scale 10:1
Eng	BS LOW	2000-01-06			0.XX	±0.13		
Chr	KH LEE	2010-06-28			0° ±2°	0.XXX	±0.051	ECN
Appr	JOEY NG	2010-06-28	Product family LPVCC				Spec ref -	
		title LOW PROFILE VCC BOTTOM ENTRY SMT 2.3 ASSY				dwg no 91596		Rev. W
		catalog no -				CUSTOMER		sheet 1 of 2

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

PRODUCT NO	POSITIONS	DIM. A	DIM.B
91596-X04	2 X 2	2.00 / .079	3.92 / .154
-X06	2 X 3	4.00 / .158	5.92 / .233
-X08	2 X 4	6.00 / .236	7.92 / .312
-X10	2 X 5	8.00 / .315	9.92 / .391
-X12	2 X 6	10.00 / .394	11.92 / .469
-X14	2 X 7	12.00 / .472	13.92 / .548
-X16	2 X 8	14.00 / .551	15.92 / .627
-X18	2 X 9	16.00 / .630	17.92 / .706
-X20	2 X 10	18.00 / .709	19.92 / .784
-X22	2 X 11	20.00 / .787	21.92 / .863
-X24	2 X 12	22.00 / .866	23.92 / .942
-X26	2 X 13	24.00 / .945	25.92 / 1.020
-X28	2 X 14	26.00 / 1.024	27.92 / 1.099
-X30	2 X 15	28.00 / 1.102	29.92 / 1.178


- NOTES:
- HOUSING MAT'L : HIGH TEMP PLASTIC.
 - TERMINAL MAT'L : BeCu.
 - TERMINAL RETENTION 0.5Kg/1.1 Lbs.
 - 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
 - PRODUCT DESCRIPTION CODE:




6. PACKAGING:
- (a) XXXXX-XXX ---STD PACKAGING IN TUBE.
 - (b) XXXXX-XXXTR ---TAPE AND REEL (CONDUCTIVE) PACKAGING WITH PICK-UP CAP (SEE FIG 1).
 - (c) XXXXX-XXXTRN ---TAPE AND REEL (CONDUCTIVE) PACKAGING WITHOUT PICK-UP CAP.
 - (d) XXXXX-XXXCR ---TAPE AND REEL (NON-CONDUCTIVE) PACKAGING WITH PICK-UP CAP (SEE FIG 1).
 - (e) XXXXX-XXXCRN ---TAPE AND REEL (NON-CONDUCTIVE) PACKAGING WITHOUT PICK-UP CAP.

7. SOLDER TAILS PLATING:
- a)SOLDERTAIL OF P/N:91596-XXX IS TIN/LEAD PLATED.
 - b)SOLDERTAIL OF P/N:91596-XXXLF IS GOLD FLASH PLATED.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. A W SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

CONTACT AREA PLATING OPTIONS
0=0.20µm/8µ"Au CONTACT AREA.
1=0.76µm/30µ"Au CONTACT AREA.
3=0.38µm/15µ"Au CONTACT AREA.

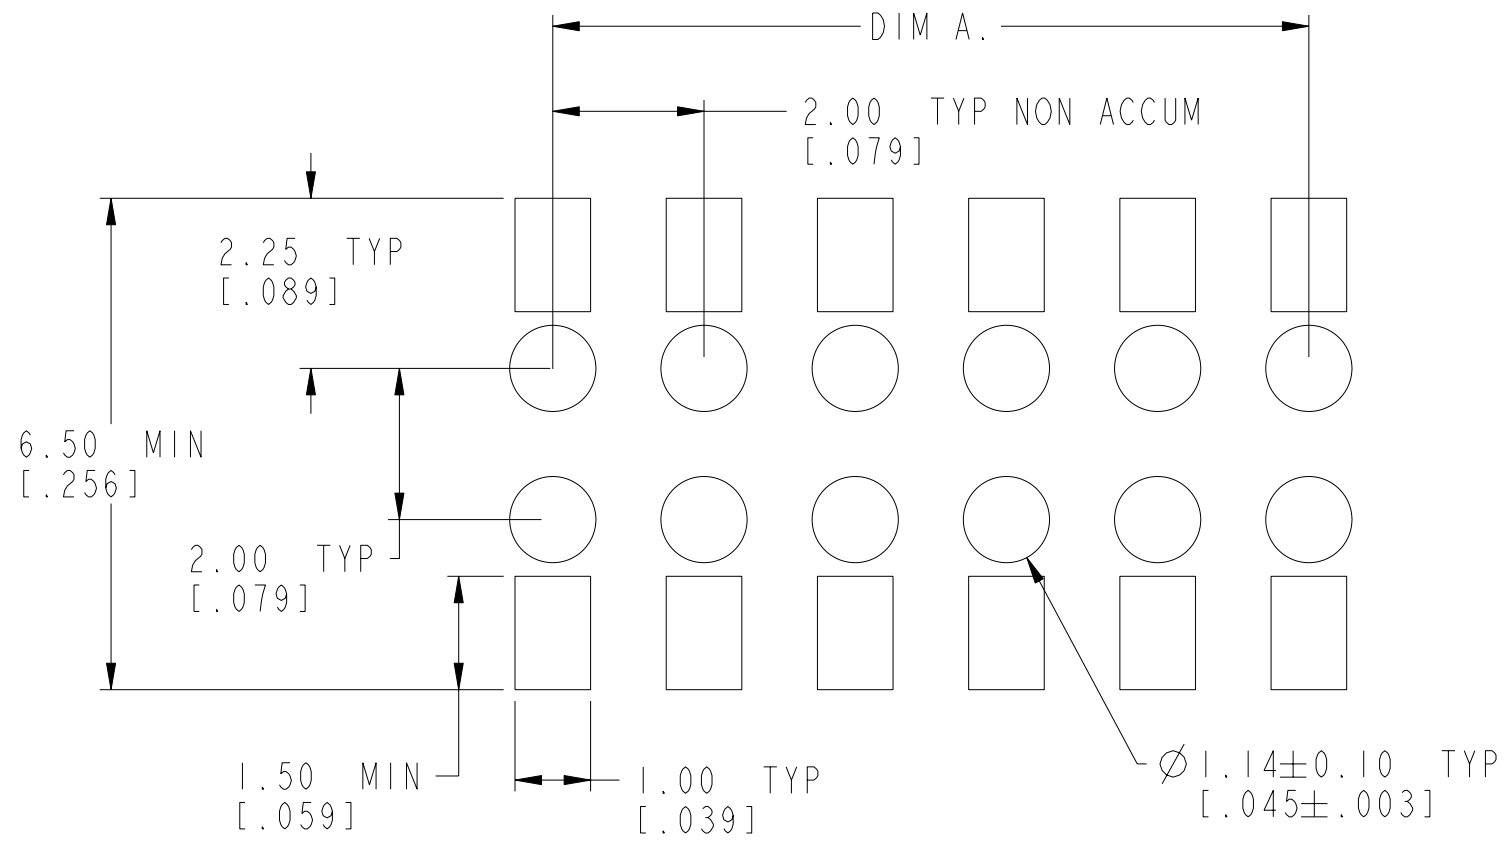

RECOMMENDED PAD LAYOUT

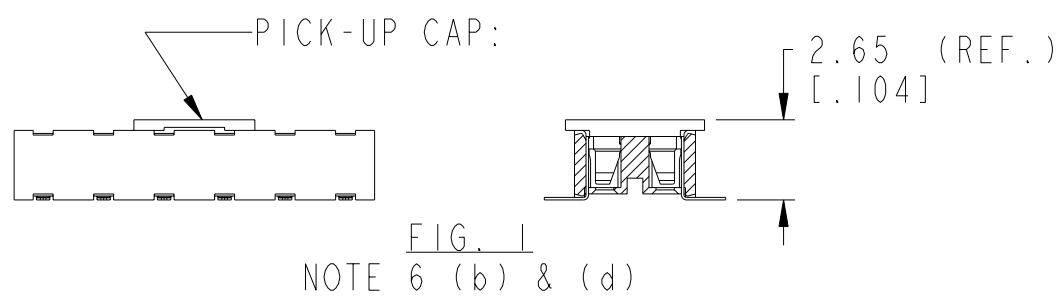

CONFIDENTIAL

Material SEE NOTES		Spec ref -			
Mat code SEE NOTES		surface -		tolerance	projection
Heat treat -		ISO 1302		ISO 406	MM / INCH
Plating/Finish SEE NOTES				ISO 1101	
Dr	BS LOW	2000-01-06			size
Eng	BS LOW	2000-01-06	Product family LPVCC		A3
Chr	KH LEE	2010-06-28	Model Name 91596_X12		Scale 10:1
Appr	JOEY NG	2010-06-28	Model Revision -		ECN S10-0136
				REL Level	-
FCI LOW PROFILE VCC		dwg no 91596		Rev. W	
BOTTOM ENTRY SMT 2.3 ASSY					
Pro/E file	catalog no			CUSTOMER	
				sheet 2 of 2	