



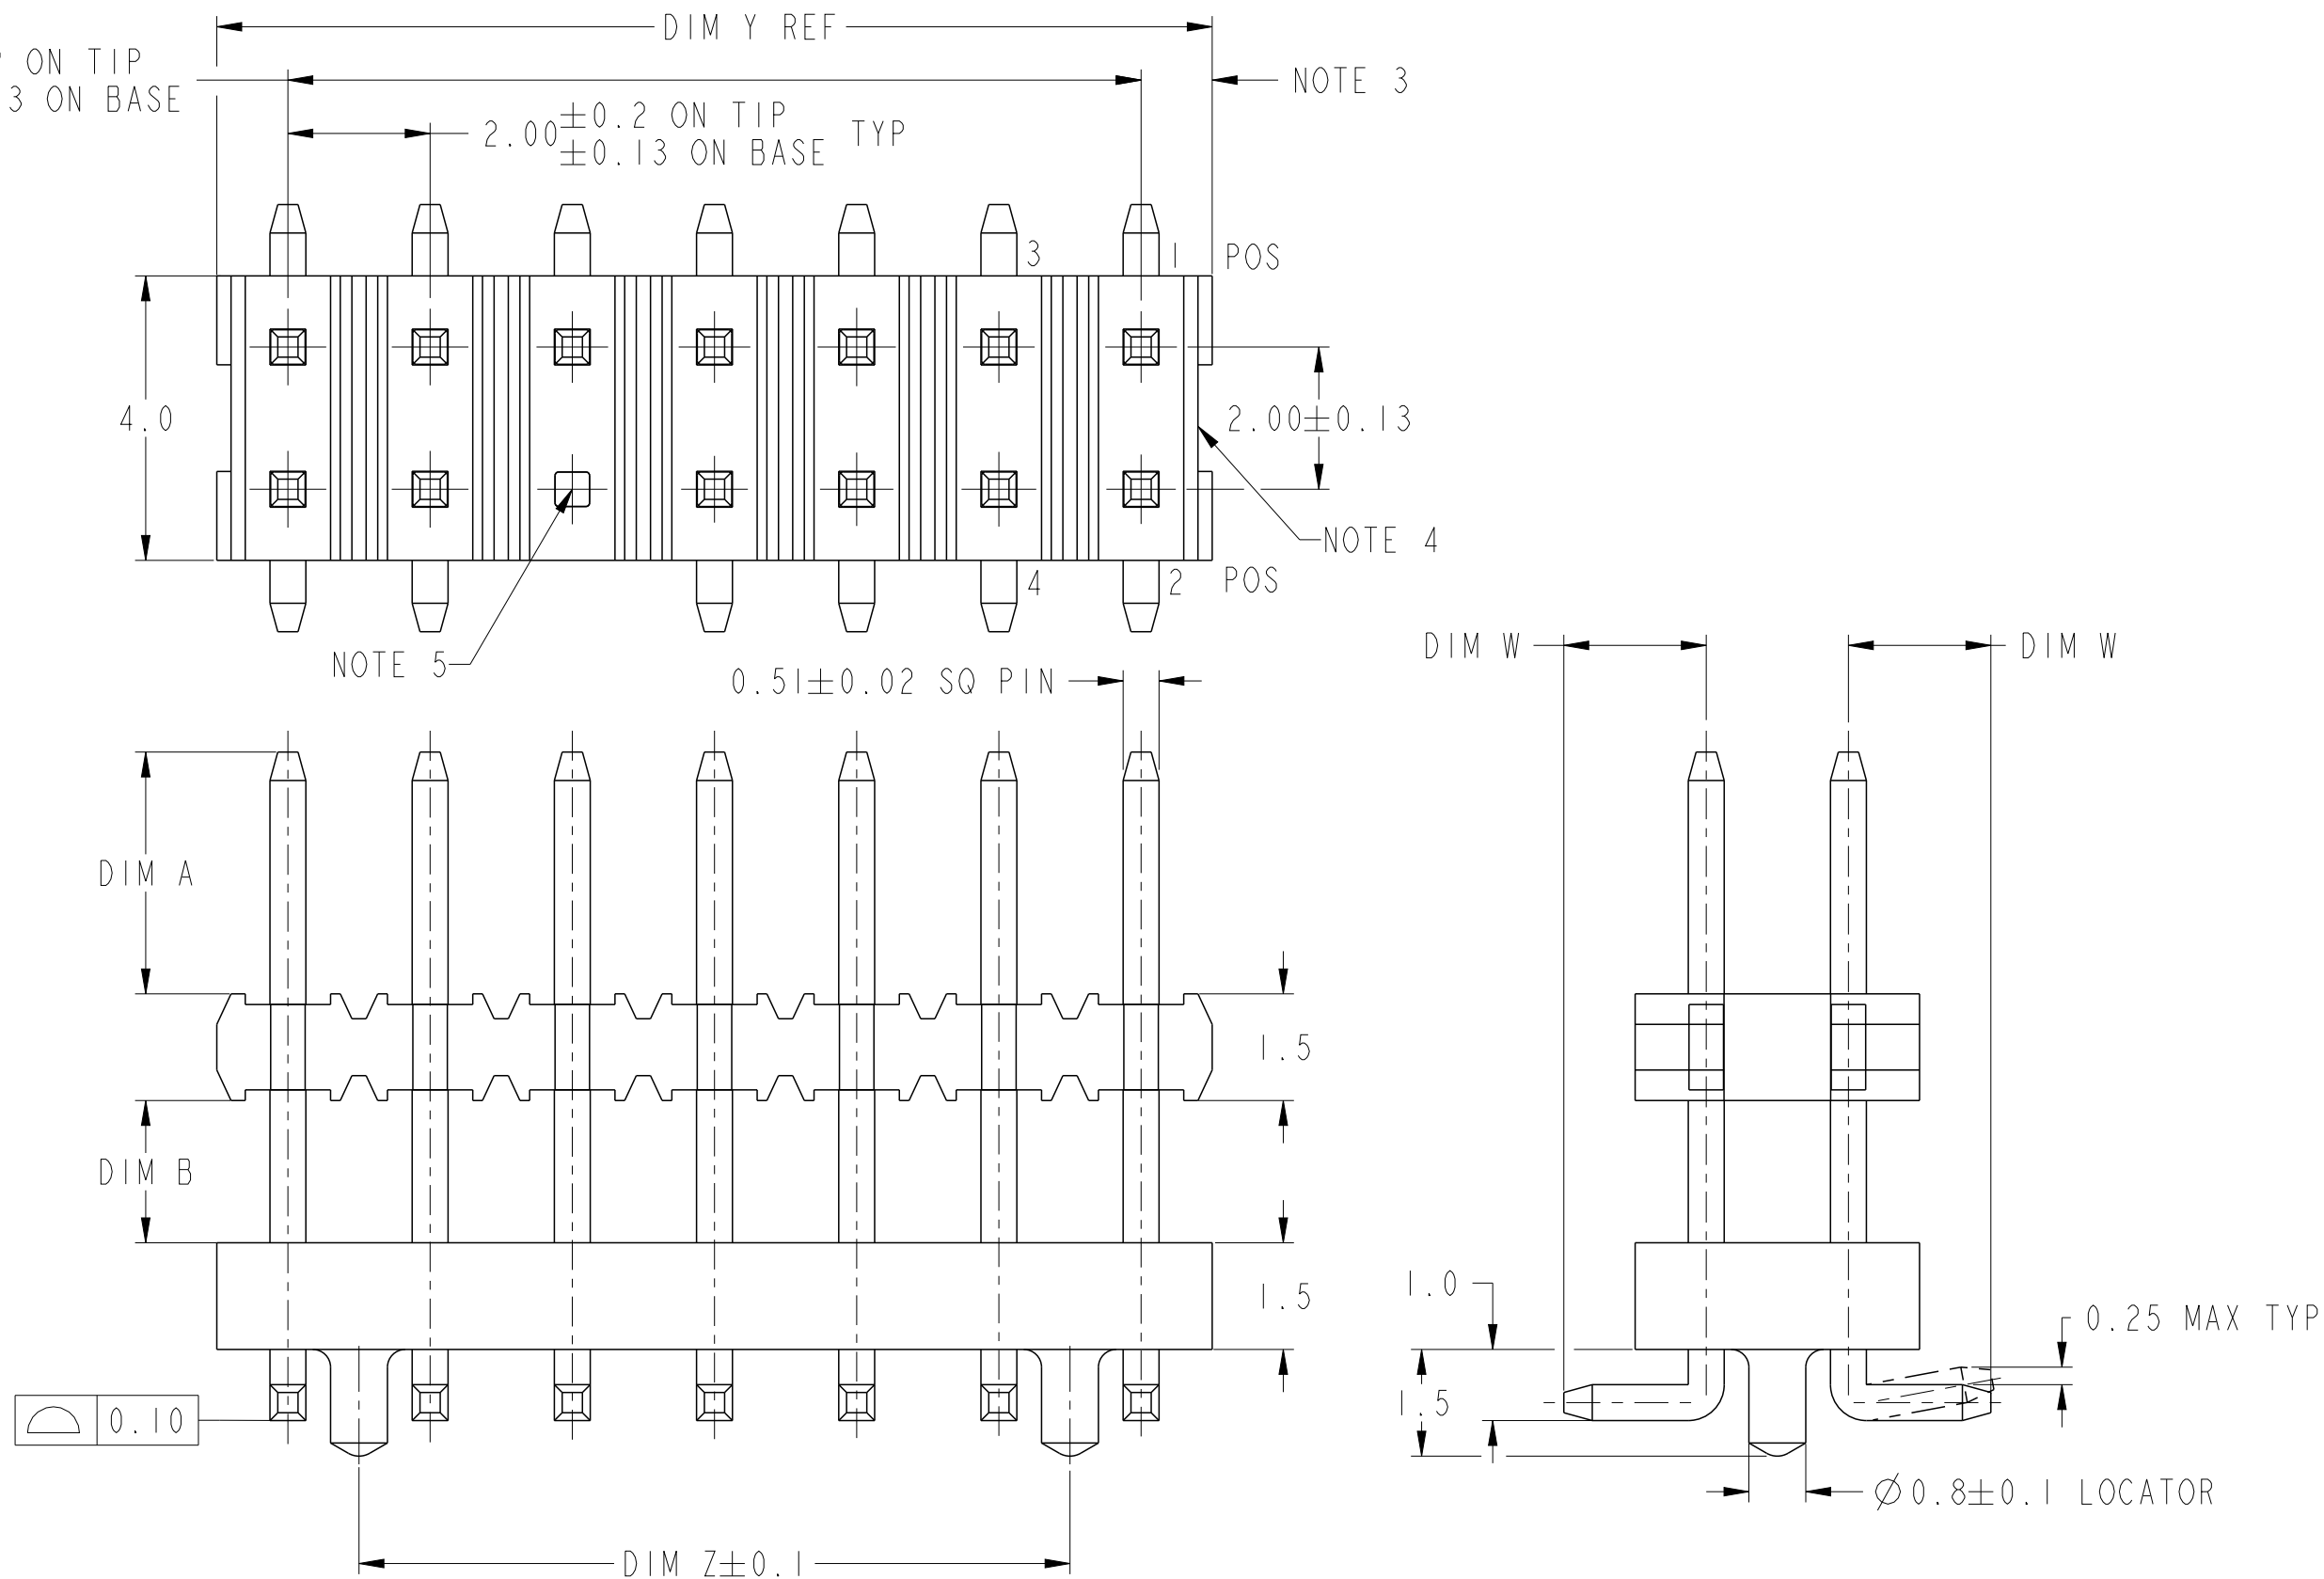


Copyright FCI.



spec ref		-		dr		wcadmin	2010/11/01		projection				size		A3	scale		10:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Tim Yang		2015/04/30						ecn no		ELX-N-20784-1							
chr				-		-																	
appr				Tim Yao		2015/04/30		product family						MINITEK		rel level		Released					
surface				linear		0.X		±-				title		MINITEK 11 R/R		dwg no		92813		rev		AX	
				0.XX		±0.25																	
				0.XXX		±-																	
ISO 1302		angular		0°		±-°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 1 of 4							


D


dr	w cadmin	2010/11/01	projection 	MM 	size	A3	scale	10:1
eng	Tim Yang	2015/04/30			ecn no	ELX-N-20784-1		
chr	-	-						
appr	Tim Yao	2015/04/30	product family		MINITEK		rel level	Released
		title			MINITEK II R/R			rev
					SMT STR HDR WITH LOCATOR			
www.fci.com		cat. no.	Product - Customer Drw			sheet 2 of 4		
					dwg no			92813
								AX

NOTES:

1. MATERIAL:
BODY : GLASS FILLED PCT UL 94V-0 NATURAL (BEIGE)
PIN : PHOSPHOR BRONZE
2. TOLERANCE UNLESS OTHERWISE NOTED ± 0.25
3. DIM 1.0 ± 0.15 APPLIES TO MOLDED SIDE(S) ONLY. IF SIDE(S) ARE BROKEN, DIM 1.5 MAX APPLIES.
4. RECESS APPLIES TO MOLDED SIDE(S) ONLY.
5. POLARISATION BY OMISSION OF PIN. POSITION REFER TO TABLE.
6. P/N 92813-XXXT TO BE PACKED IN TUBE.
7. P/N 92813-011TC, 014TC, 023TC & 024TC TO BE PACKED IN TUBE WITH PICK-UP CAP INSTALLED IN THE CENTRE OF THE PRODUCT. SEE FIG. 1.
8. P/N 92813-XXXTR TO BE PACKED IN TAPE & REEL WITH PICK-UP CAP INSTALLED IN THE CENTRE OF THE PRODUCT. SEE FIG. 1.
9. PRODUCT PART NUMBER DESCRIPTIONS:
92813 - XXX LF
LEAD FREE. SEE NOTE 10
NO. OF POSITIONS (RANDOM)
10. P/N:92813-XXXLF IS SAME TO 92813-XXX. THE SUFFIX 'LF' IS ADDED JUST FOR EASY LEAD FREE IDENTIFICATION.
11. THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN

12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A MINIMUM 1.57mm THICK CIRCUIT BOARD.
13. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
14. PN 92813-041TRS TO BE PACKED IN TAPE&REEL WITH PICK-UP(L*W=8MM*7MM)

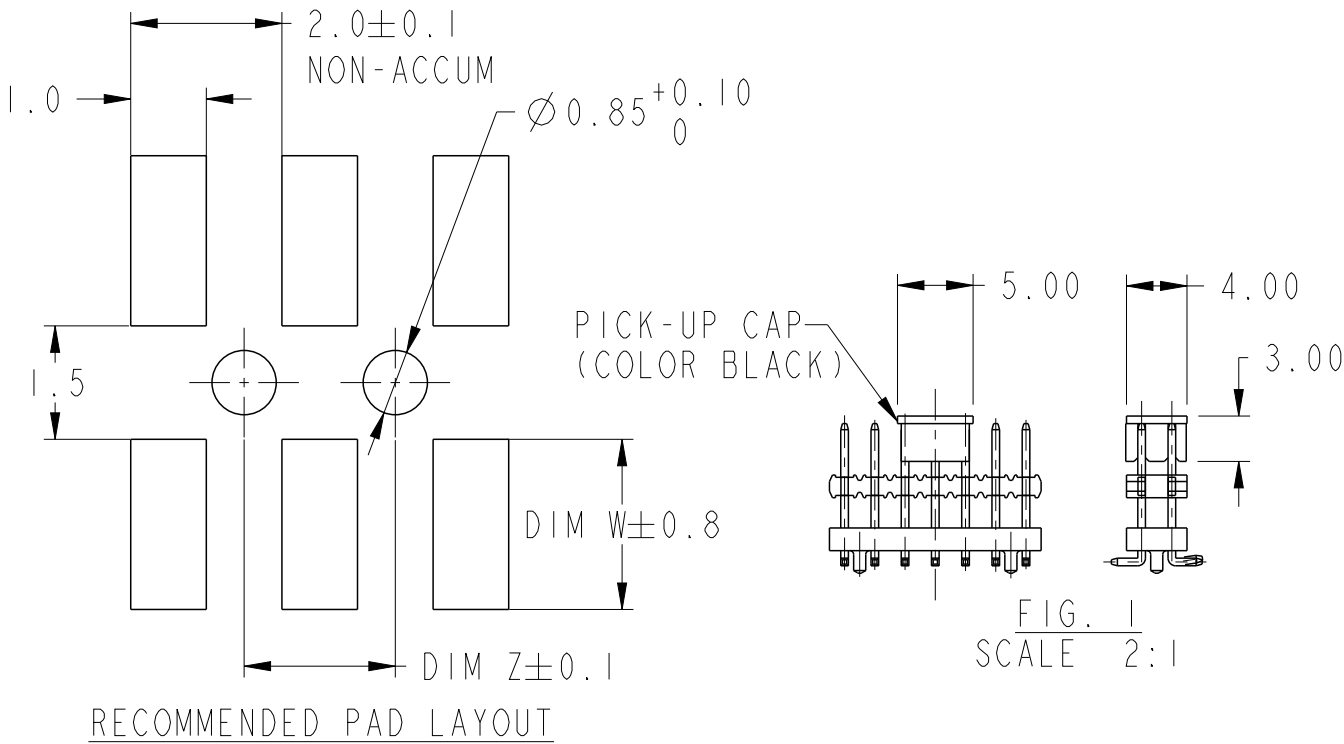

dr	wcadmin	2010/11/01	projection 	MM 	size	A3	scale	5:2
eng	Tim Yang	2015/04/30			ecn no		ELX-N-20784-1	
chr	-	-						
appr	Tim Yao	2015/04/30	product family		MINITEK		rel level	Released
			title		MINITEK II R/R			rev
					SMT STR HDR WITH LOCATOR			
www.fci.com			cat. no.	-	Product - Customer Drw			sheet 4 of 4
					92813			AX