

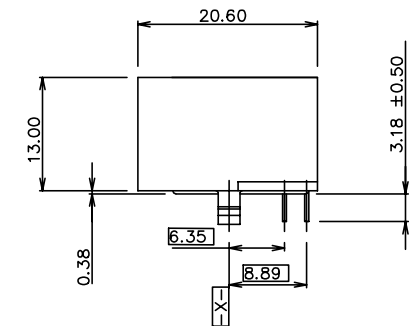
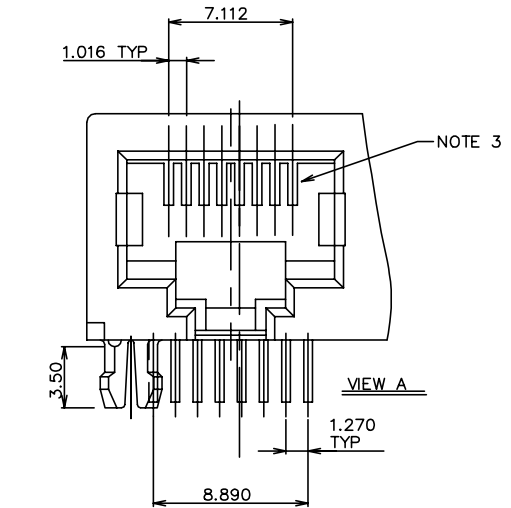


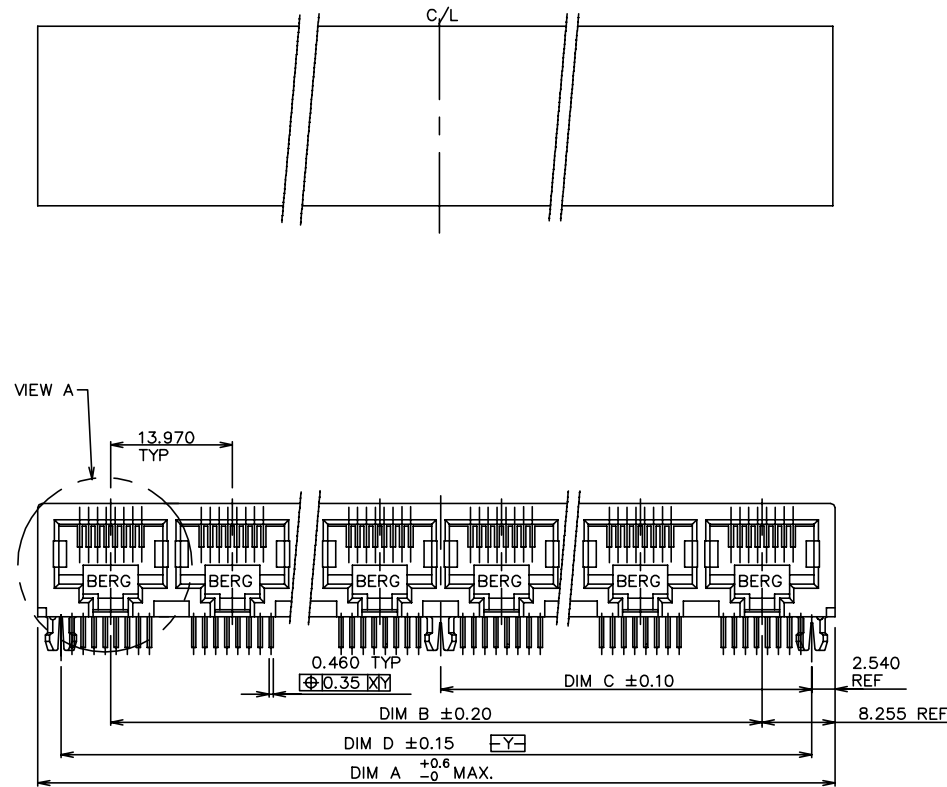

mat'l. code				surface		tolerance		projection		product family	
ISO 1301				ISO 406		ISO 1101		mm		MOD JACK	
tolerances unless otherwise specified				angle		mm		scale 1.0		R/A CAT5 GANG JACK ASSY	
E M04-0174 MTH 8/17/04				0° $\pm 2'$		0.X ± 0.3		8/30/95		8 POS UNSHIELDED SNAP PEG	
F M04-0187 MTH 10/06/04				0° $\pm 2'$		0.XX ± 0.13		8/30/95		8 POS UNSHIELDED SNAP PEG	
G M05-0067 MTH 4/8/05				0° $\pm 2'$		0.XXX ± 0.051		8/30/95		8 POS UNSHIELDED SNAP PEG	
H N06-0036 DT 2/9/06				0° $\pm 2'$		0.XXX ± 0.051		8/30/95		8 POS UNSHIELDED SNAP PEG	
J ELX-N-007928 SH 2011-11-18				0° $\pm 2'$		0.XXX ± 0.051		8/30/95		8 POS UNSHIELDED SNAP PEG	
K ELX-N-011015 SH 03/27/12				0° $\pm 2'$		0.XXX ± 0.051		8/30/95		8 POS UNSHIELDED SNAP PEG	
app'd Y.BELOPOLSKY				0° $\pm 2'$		0.XXX ± 0.051		8/30/95		8 POS UNSHIELDED SNAP PEG	
sheet index				revision		K		K		type	
sheet 1				revision 2		K		K		Product Customer Drawing	

1. APPLICABLE PC BOARD THICKNESS: 1.6 mm.
2. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000,
Ø0.460 ROUND WIRE, PLATING SEE TABLE.
3. CENTER PEG FOR 8 PORT AND ABOVE.
- ④ 4. OPTIONAL CENTER PEG IN PORT 6
(95679-X06PLF) WITH CENTER PEG
(95679-X06LF) WITHOUT CENTER PEG
- ⑤ 5. PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A
1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
- ⑥ 6. PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
7. PRODUCT SPECIFICATION GS-12-083
PACKAGING SPECIFICATION GS-14-361

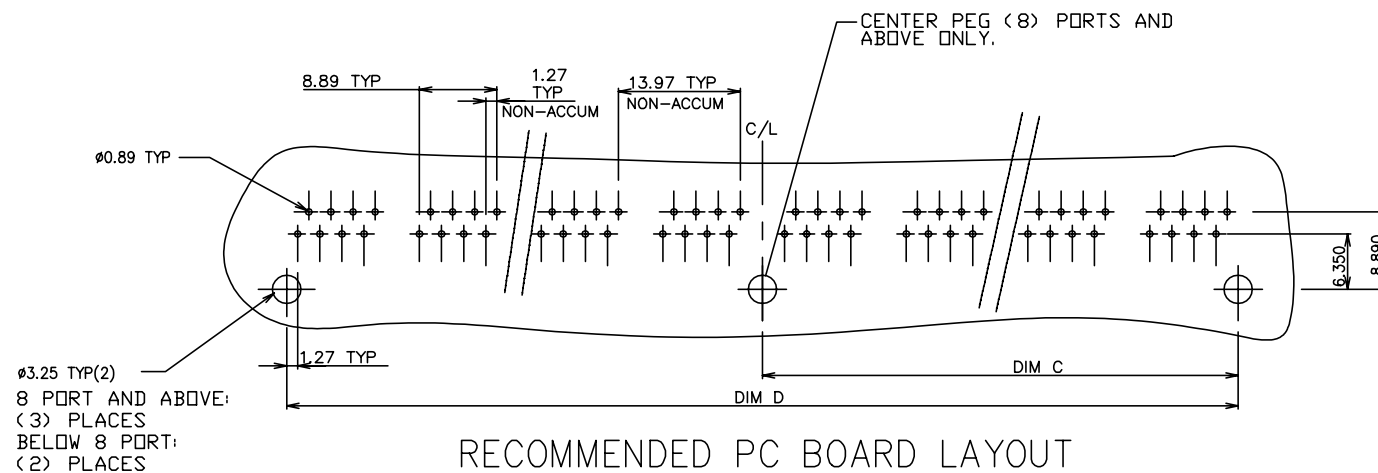

RECOMMENDED PC BOARD LAYOUT

PLATING CODE X	PLATING ⑥
0	5u" Au + high performance lubricant
1	15u" GOLD.
2	15u" G.X.T.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code		surface		tolerance		projection		product family	
		ISO 1301 ✓		ISO 406 ISO 1101				MOD JACK	
ltr ecn nodr		date		tolerances unless otherwise specified		title			
K				angle		MM		R/A CAT5 GANG JACK ASSY	
				0.X±0.3				8 POS UNSHIELDED SNAP PEG	
				0.XX±0.13		scale 1.0			
				0°±2'					
		dr		L.POTTEIGER		8/30/95		dwg no	
		eng		Y.BELOPOLSKY		8/30/95		sheet 2 of 2	
		chr		Y.BELOPOLSKY		8/30/95		95679	
		app		Y.BELOPOLSKY		8/30/95		A4	
sheet		revision						type	
index		sheet						Product Customer Drawing	