
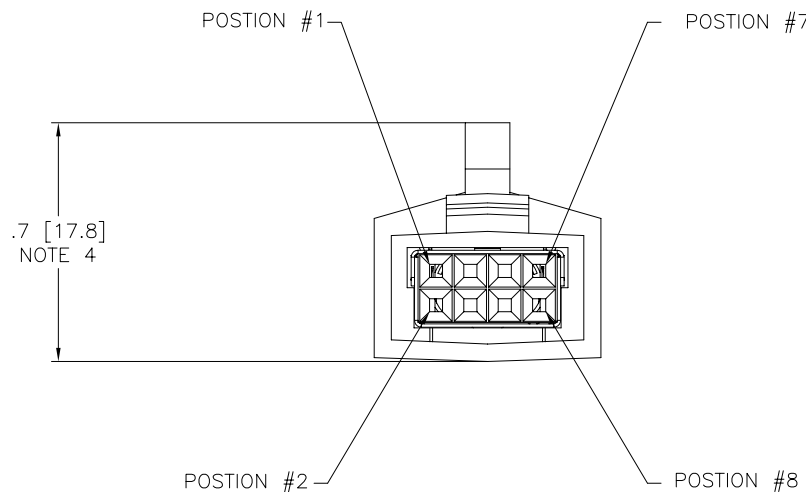
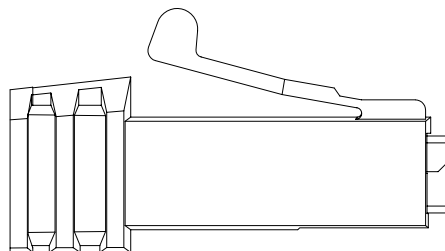


PRODUCT NO.
SEE SHT. 2

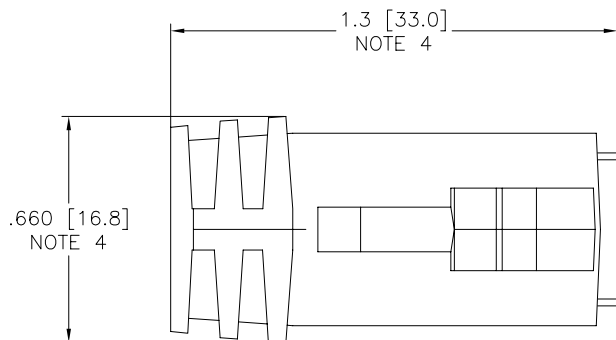

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406 ISO 1101		LATCH-N-LOK
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title
A	V90622	CGC	3/4/99	angles	linear		2X4 LNL 360° SHIELDED PLUG CONN. KIT W/O PV'S
B	V91818	RGD	8/12/99			scale 2:1	dwg no
C	V92065	RGD	11/2/99	0°±2'			98028
D	V01093	TFG	7/6/00	dr	M.HERNANDEZ	FCI	sheet 1 of 3 size
E	M04-0229	MHT	12/03/04	enrg	M. BARRIOS		A3
F	M06-0365	AGS	9/21/06	chr	M. BARRIOS	type	Product Customer Drawing
				appd	M. BARRIOS		
sheet	revision	F	F	F			
index	sheet	1	2	3			

form: A3

98028-WXYZLF

Z key position

1	POSITION 1
2	POSITION 2
3	NO KEY

XY color

01	LT. GRAY	---	OBS
02	OFF WHITE		
03	DK. GRAY	---	OBS
04	BLACK		
05	SLATE GRAY	---	OBS
06	D. GRAY	---	OBS
07	SILVER GRAY		
08	PEARL WHITE	---	OBS
09	PEBBLE GRAY		

W cable o.d.

7	.250/6.35
8	.280/7.11

EXAMPLE



98028-7013LF: IS A 2X4 REAR EXIT PLUG
IN LIGHT GRAY WITH A CABLE EXIT
HOLE SIZE OF .250[6.35] CABLE RANGE,
WITH NO KEYING OPTION.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family LATCH-N-LOK
ltr	ecn	no	dr	date	tolerances unless otherwise specified	INCH/MM scale 2:1 	title
F					angles linear .XX±.01/.3		2X4 LNL 360° SHIELDED PLUG CONN. KIT W/O PV'S
					0'±2' linear .xxx±.005/.13 .xxxx±.0020/.051		
				dr	M.HERNANDEZ	12/03/04	dwg no
				enr	M. BARRIOS	12/03/04	sheet 2 of 3
				chr	M. BARRIOS	12/03/04	size
				app	M. BARRIOS	12/03/04	A3
sheet	revision						type
index	sheet						Product Customer Drawing

VIEWS OF BOTTOM OF PLUG


KEY POSITION 1

SHIELD CAN





MATES WITH P/N 74355-XXX1
MATES WITH P/N 87316-XXX1

REAR CAP



KEY POSITION 2



SHIELD CAN



MATES WITH P/N 74355-XXX2
MATES WITH P/N 87316-XXX2


NO KEY

SHIELD CAN




MATES WITH P/N 74355-XXX
MATES WITH P/N 87316-XXX

MINI LATCH HOUSING




TOP SHIELD



BOTTOM SHIELD

PLUG FRONT



NOTES:

1. EACH KIT CONTAINS ONE OF EACH OF THE FOLLOWING COMPONENTS
LATCH -N- LOK PLUG
LATCH -N- LOK END CAP
MINI LATCH HOUSING
360° SHIELD CANS.
2. COMPONENTS ARE BULK PACKAGED WITH 100 pcs. OF A COMPONENT
PER BAG. PV'S MUST BE ORDERED SEPERATELY.
3. MATERIALS USED: PLUGS AND CAPS ARE MOLDED IN POLYCARBONATE.
THE MINI LATCH HOUSINGS ARE MOLDED IN NYLON. COLOR IS BLACK.
THE SHIELD CAN IS 3/4 HARD BRASS PLATED WITH 2.5um MIN. BRIGHT TIN.
1.0um MIN. NICKEL UNDERPLATE.
- ④ DIMENSIONS ARE APPROXIMATE AND REFLECT PLUG IN UNLATCHED STATE.
5. PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family LATCH-N-LOK
ltr	ec	no	dr	date	tolerances unless otherwise specified	scale 2:1	title
F					angles linear .XX±.01/.3		2X4 LNL 360° SHIELDED PLUG CONN. KIT W/O PV'S
					0°±2'		dwg no
					linear .XXX±.005/.13		98028
					.XXXX±.0020/.051	FCI	sheet 3 of 3 size
				dr	M.HERNANDEZ 12/03/04		A3
				enr	M. BARRIOS 12/03/04		type
				chr	M. BARRIOS 12/03/04		Product Customer Drawing
				app	M. BARRIOS 12/03/04		
sheet index	revision sheet						