

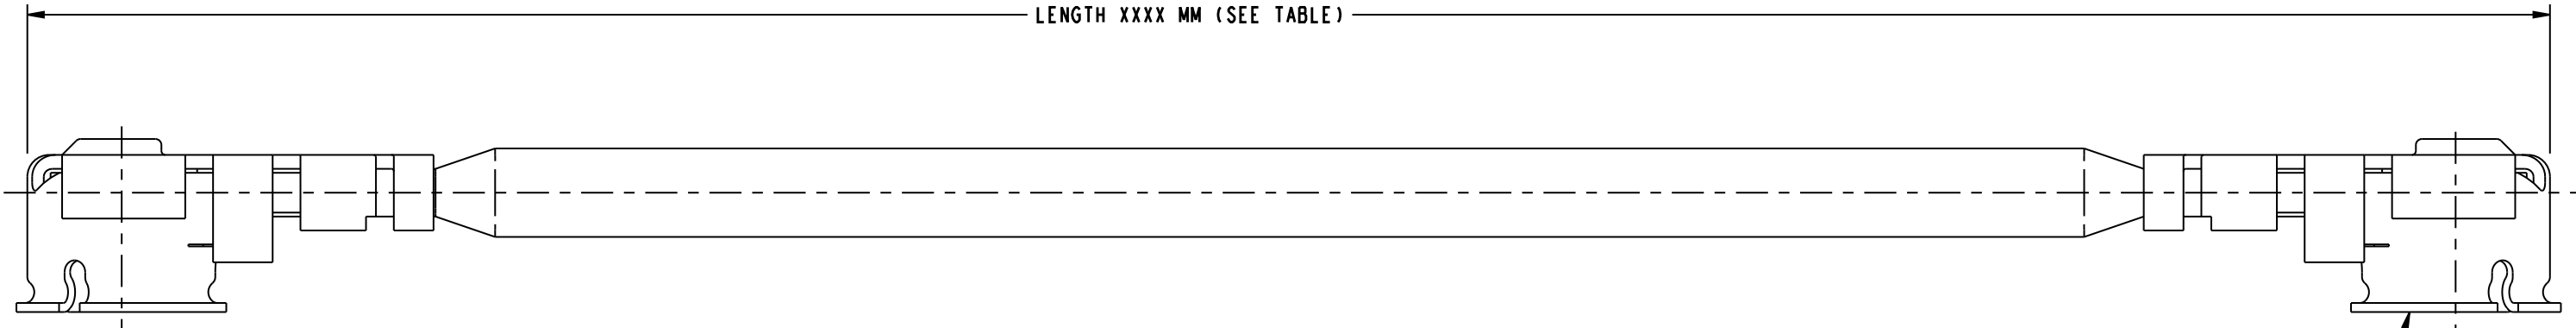


- NOTES:
1. PACKAGE CABLE ASSEMBLY IN BAG. TAG IN BAG WITH "AMPHENOL CONNEX, 335104-12-XXXX AND DATE CODE".
  2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT, CONTINUITY, SHORTS AND OPEN.

335104-12-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	24-Sep-10	--	KR

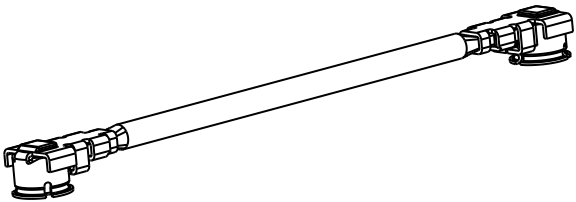

ORIENT MICRO-COAXIAL INTERFACE WITH  
RESPECT TO MICRO-COAXIAL INTERFACE  
AS SHOWN WITH IN  $\pm 10^\circ$

CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
335104-12-0050	1.968 $\pm 0.150$	50 $\pm 3.81$
335104-12-0100	3.936 $\pm 0.150$	100 $\pm 3.81$
335104-12-0150	5.905 $\pm 0.150$	150 $\pm 3.81$
335104-12-0200	7.873 $\pm 0.200$	200 $\pm 5.08$
335104-12-0250	9.842 $\pm 0.200$	250 $\pm 5.08$
335104-12-0300	11.810 $\pm 0.200$	300 $\pm 5.08$

\* ADDITIONAL LENGTHS CAN BE PROVIDED  
BY CHANGING XXXX TO DESIRED LEGNTH IN MM  
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- ☐ FREQUENCY..... TO ..... GHz
- ☐ VSWR ..... : 1 MAX
- ☐ INS. LOSS ..... dB MAX
- ☒ CONTINUITY
- ☒ HI-POT : 250 VRMS
- ☐ OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL      3 PLACE DECIMAL      ANGLES ±.015 (0,381 mm)      ±.005 (0,127 mm)      ± 1°	MATERIAL	DRAWN KARTHIK R	DATE 24-Sep-10	TITLE MICRO COAX CABLE PLUG TO PLUG, USING 1.13 MM CABLE XXXX MM, LENGTH		Amphenol Connex	
	REFERENCE  TASK - 430	ENGINEER KARTHIK R	DATE 24-Sep-10				
		APPROVED	DATE	SCALE: 12.0:1		SHEET	1 OF 1
		CAD FILE Root Folder/Cable_Assy/335104-12-XXXX	DWG SIZE B	DRAWING NO. 335104-12-XXXX		REV A	