

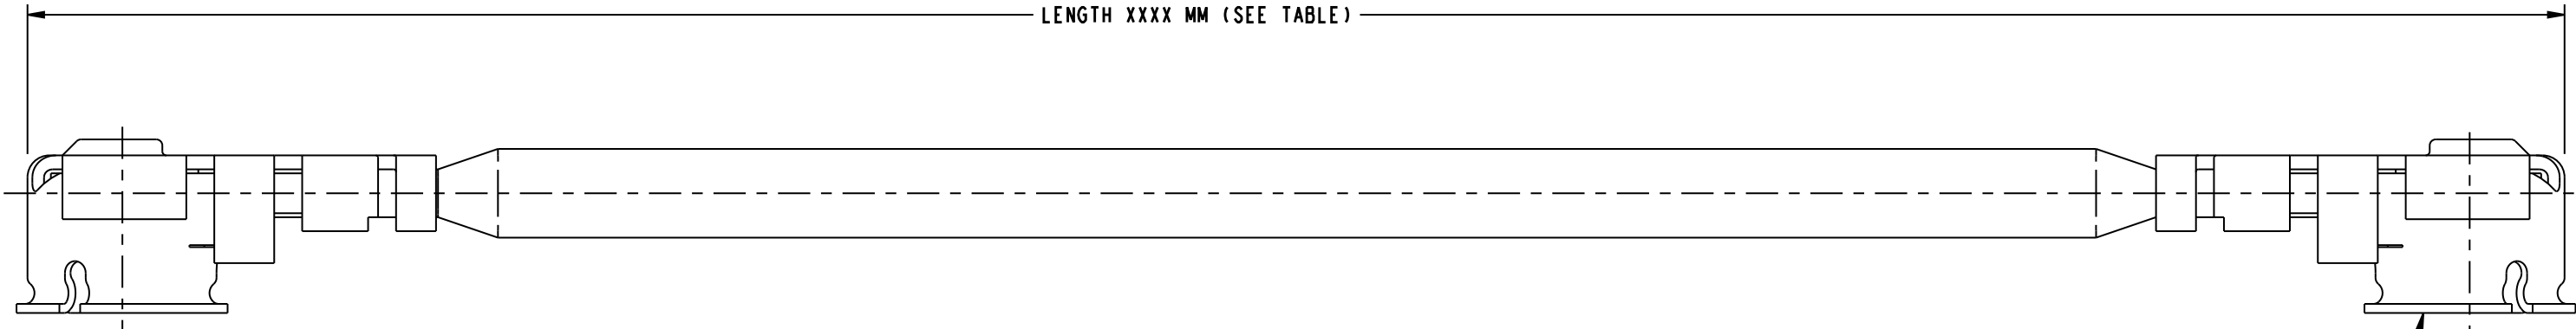


- NOTES:
1. PACKAGE CABLE ASSEMBLY IN BAG. TAG IN BAG WITH "AMPHENOL CONNEX, 335104-13-XXXX AND DATE CODE".
 2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT, CONTINUITY, SHORTS AND OPEN.

335104-13-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	24-Sep-10	--	KR

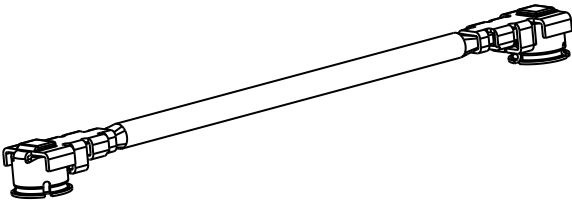

ORIENT MICRO-COAXIAL INTERFACE WITH
RESPECT TO MICRO-COAXIAL INTERFACE
AS SHOWN WITH IN $\pm 10^\circ$

CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
335104-13-0050	1.968 ± 0.150	50 ± 3.81
335104-13-0100	3.936 ± 0.150	100 ± 3.81
335104-13-0150	5.905 ± 0.150	150 ± 3.81
335104-13-0200	7.873 ± 0.200	200 ± 5.08
335104-13-0250	9.842 ± 0.200	250 ± 5.08
335104-13-0300	11.810 ± 0.200	300 ± 5.08

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XXXX TO DESIRED LEGNTH IN MM
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

<input type="checkbox"/> FREQUENCY..... TO GHz	<input checked="" type="checkbox"/> CONTINUITY
<input type="checkbox"/> VSWR : 1 MAX	<input checked="" type="checkbox"/> HI-POT : 250 VRMS
<input type="checkbox"/> INS. LOSS dB MAX	<input type="checkbox"/> OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES $\pm .015$ (0,381 mm) $\pm .005$ (0,127 mm) $\pm 1^\circ$	MATERIAL	DRAWN KARTHIK R	DATE 24-Sep-10	TITLE MICRO COAX CABLE PLUG TO PLUG, USING 1.32 MM CABLE XXXX MM, LENGTH	Amphenol Connex	
		ENGINEER KARTHIK R	DATE 24-Sep-10			
	REFERENCE TASK - 431	APPROVED	DATE		SCALE: 12.0:1 SHEET 1 OF 1	
	CAD FILE Root Folder/Cable_Assy/335104-13-XXXX		DWG SIZE B	DRAWING NO. 335104-13-XXXX	REV A	