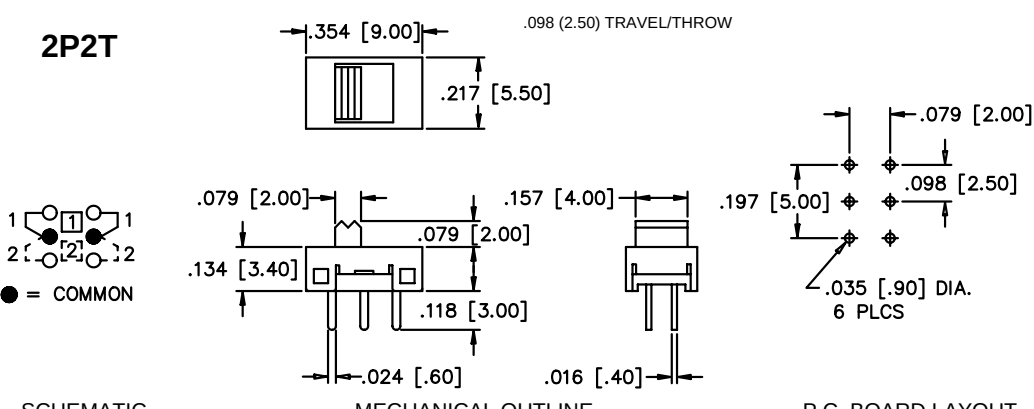


MSSA Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS		FEATURES	
Contact ratings: Gold; 0.4 Volt-Amps (VA) max. at 20 V max. (AC or DC) Silver; 100 mA at 125 VAC or 30 VDC Initial contact resistance: 30 milliohms max. Insulation resistance: 100 megohms min. at 250 VDC Dielectric strength: 250 volts RMS at sea level Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Actuation force: 250g ± 150g Solder heat resistance: 260°C max. for 3 seconds Washing not recommended		● Low Profile. ● Epoxy sealed terminals. ● Cosmetic molded case.	
		MATERIALS	
		Contacts & terminals: Gold or silver available (see contact ratings) Housing and Actuator: Thermoplastic Base: High temperature thermoplastic Terminal seal: Epoxy	
MODEL NO.	PLATING	2P2T 	
MSSA22G	GOLD		
		VERTICAL ACTUATOR SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT	