



NOTES:

1. MAX. MTG. TORQUE = 3lb-in.
2. HARDWARE IS INCLUDED.

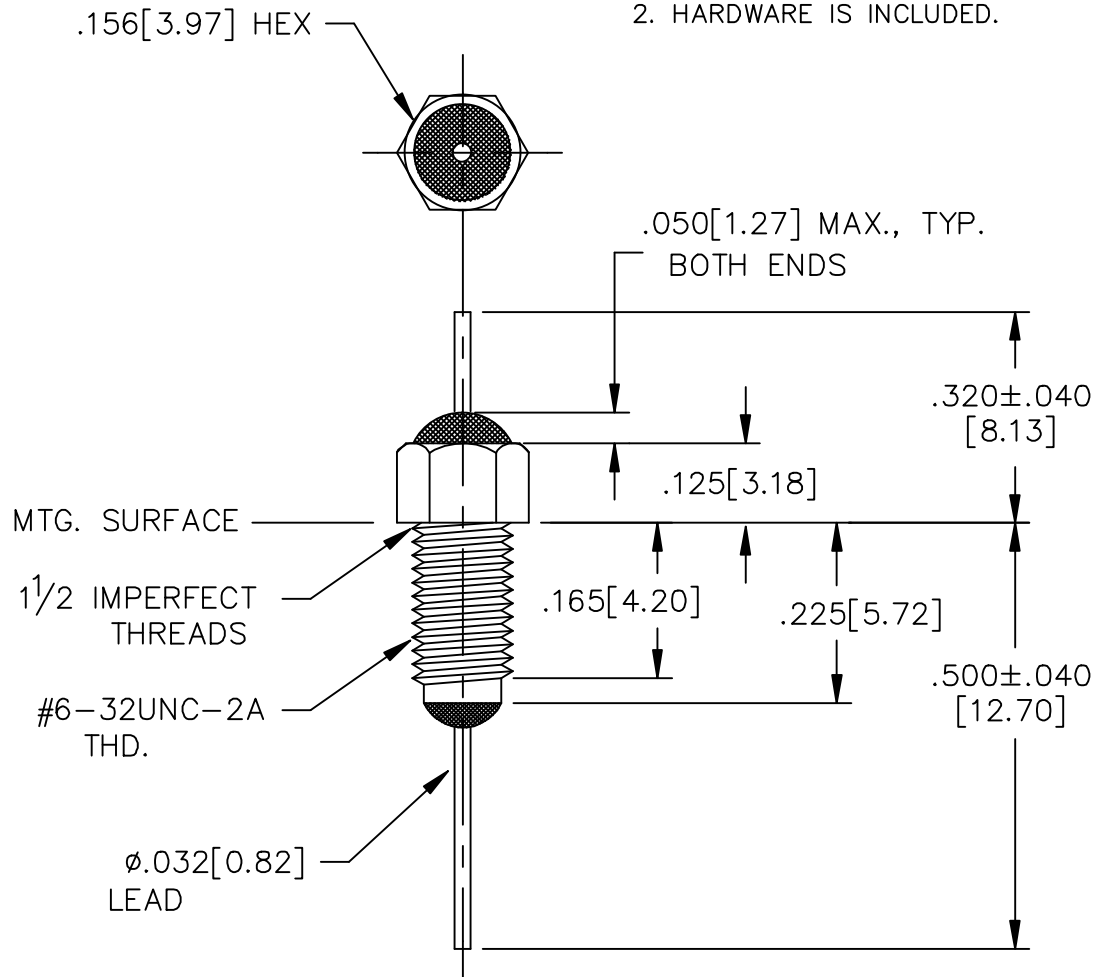

LEAD FINISH:	SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	1000pF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
100	N/A
500	N/A
1 GHz	N/A
10 GHz	N/A


SCHEMATIC



MARKING:

PART: SF 102P

BAG:
SCIF 779-072
DATE CODE
QTY/BAG (200 MAX.)

	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	api  FAIRVIEW PENNSYLVANIA technologies corp.	
			Fractions ± 1/64		
			Dec. .xx±	Dwn. KAUFFMAN	Description FEED THRU
			Dec. .xxx±.005	Date 11-8-13	RESIN SEAL FILTER
			Angles ±0° 30'	Engr. B. DEVINE	
			CODE IDENT. NO. QLSP2	Scale NONE	54F-779-072
	CR #273	CHANGE NOTICE			