

10 Watts

AEE01-Dual

Total Power: 10 Watts
Input Voltages: 48V, 24V
No. of Outputs: Dual



Special Features

- 10 W, Dual output
- 2:1 Input range
- 1.0" x 2.0" x 0.33 case
- Industry standard package
- Low Profile
- Low Cost

Environmental

Operating base temperature range:

-25°C to +95°C

Storage temperature: -40°C to +105°C

MTBF: 2.7 Million Hours (Belcore TR332)

Safety

UL UL1950 Recognition

CSA CSA22.2-950 Recognition

TUV EN60950 Recognition

Electrical Specs

Input

Input range 18 to 36 VDC
36 to 72 VDC

Efficiency 79% typical ($\pm 5V$)

Output

Voltage tolerance $\pm 1.0\%$
Overall regulation $\pm 1\%$ max
Noise/ripple 1% (mV P-P)
Transient response 200 usec typical (50% step load change to within 5%Vo)

Temperature Regulation $\pm 0.02\% V_o / ^\circ C$

Switching frequency 330kHz

Isolation

I/O isolation 500 VDC
Isolation Resistance 300 Mohms

AMERICAS

5810 Van Allen Way
Carlsbad, CA 92008
Telephone: 760-930-4600
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX, UK
Telephone: 44 (1384) 842-211
Facsimile: 44 (1384) 843-355

ASIA


Units 2111-2116, Level 21
Tower1, Metroplaza
223, Hing Fong Road
Fwai Fong, New Territories
Hong Kong
Telephone: 852-2437-9662
Facsimile: 852-2402-4426



Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
18-36 V	$\pm 5V @ \pm 1.0 A$	79%	AEE01AA24
18-36 V	$\pm 12V @ \pm 0.42 A$	83%	AEE00BB24
18-36 V	$\pm 15V @ \pm 0.33 A$	83%	AEE00CC24
36-72 V	$\pm 5V @ \pm 1.0 A$	79%	AEE01AA48
36-72 V	$\pm 12V @ \pm 0.42 A$	83%	AEE00BB48
36-72 V	$\pm 15V @ \pm 0.33 A$	83%	AEE00CC48

Mechanical Dimensions and Pin Assignments

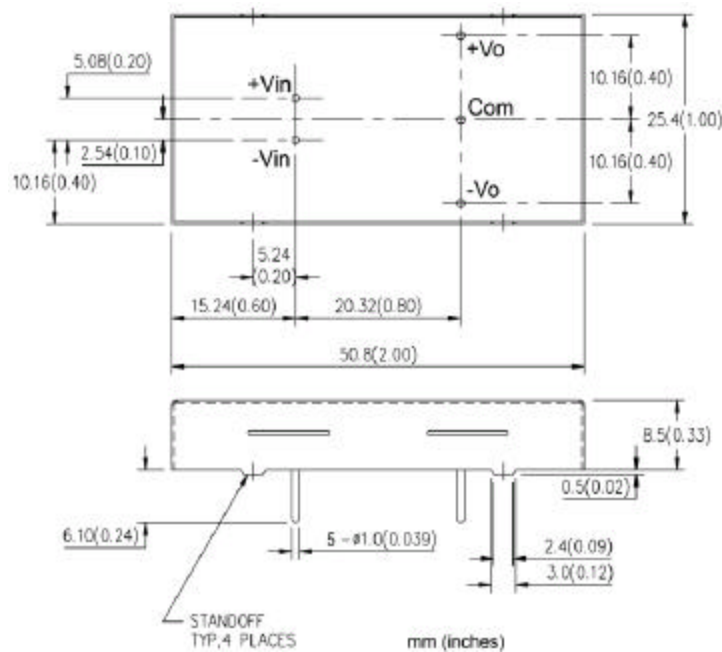

Notes:

1. 20 MHz bandwidth. An external 0.1 uf ceramic capacitor is recommended to be placed from +V out to comm.
2. All specifications are typical at nominal line, full load, and 25°C unless otherwise noted.
3. All specifications subject to change without notice.
4. Mechanical drawings are for reference only.