


## AEH25 Series 300 Watts

**Total Power:** 300 Watts (12 V @ 25 A)  
**Input Voltage:** 48 V  
**# of Outputs:** Single



Rev. 3.4.09\_179  
AEH25 Series  
1 of 2

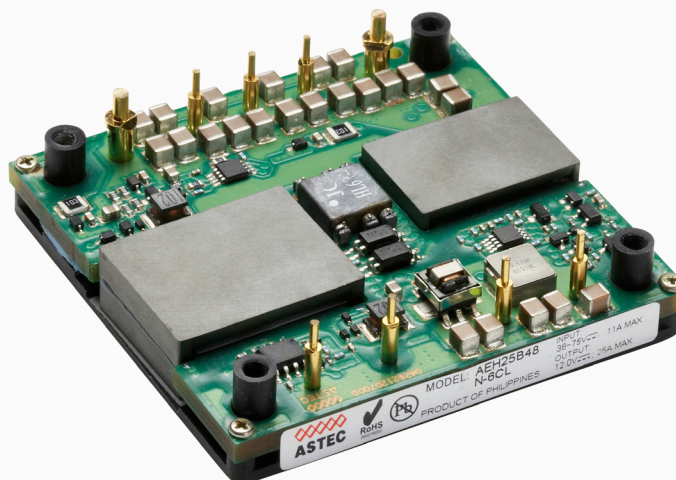

### Special Features

- Industry Standard Half Brick baseplate design
- Low output ripple and noise
- High capacitive load limit on start-up
- Regulation to zero load
- Fixed frequency switching
- Industry standard features: Input UVLO, OCP, OVP, OTP; Output Adjust, Differential Remote Sense, On/Off Enable
- Meets Basic Insulation
- EU directive 2002/95/EC compliant for RoHS

## Electrical Specifications

Input	
Input range:	36-75 Vdc
Input surge:	100 V / 100 ms
Efficiency:	93% @ 12 V (typical)
Output	
Regulation: (Line, Load, Temp)	< 2%
Ripple and noise <sup>1</sup> :	120 mV (typical)
Remote sense:	Up to 10% Vout
Output voltage adjust range:	± 10% of nominal output
Transient response:	180 mV typical output deviation 25% step change 300 µs recovery time
Overvoltage protection:	115% nominal output
Overcurrent protection:	116% Io nominal
Isolation voltage:	1500 Vdc
Control	
Enable:	TTL compatible (positive or negative enable logic control options)

## Environmental Specifications

Operating temperature:	-40 °C to +100 °C baseplate
Storage temperature:	-55 °C to +125 °C
Overttemperature protection:	110 °C typical
MTBF:	> 1 mission hours

### Safety

- UL, cUL 60950-1 Recognized
- TUV EN60950-1 Licensed



## Ordering Information

Input Voltage	Output Voltage	Output Current	Efficiency <sup>2</sup>	Model Number
36 V to 75 V	12 V	25 A	93%	AEH25B48(N)-6C(L)
36 V to 75 V	12 V	25 A	93%	AEH25B48N-5CL


### Notes:

Efficiency values taken at nominal input, full load condition, 25 °C ambient temperature

### Options:

- (N) : "N" = designates Negative Logic Enable (default is Positive with no suffix "N" required)
- (L) : "L" = RoHS compliant (RoHS 6) / "Blank" = RoHS compliant with Lead (Pb) in solder exemption (RoHS 5)
- - -5CL = RoHS compliant (RoHS 6), 4.5mm nominal pin length

## Mechanical Drawing

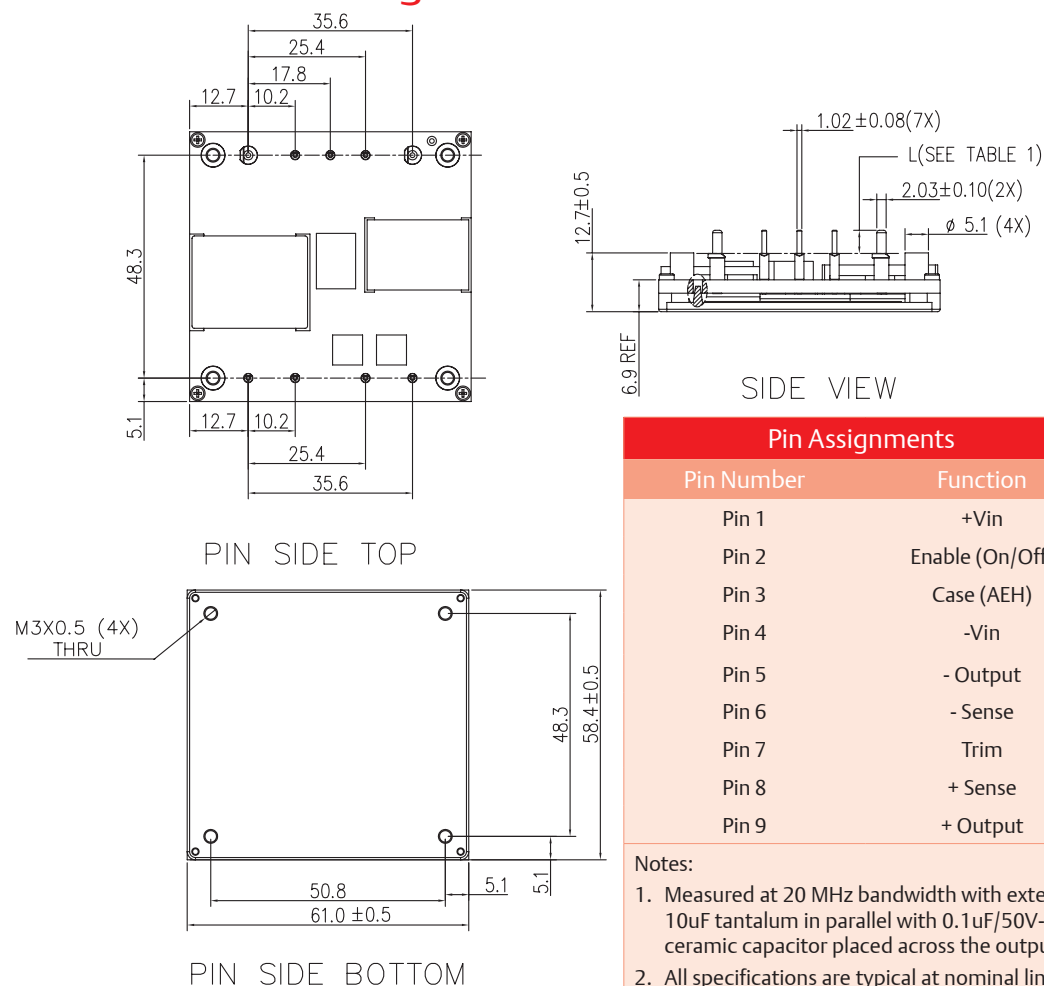

## Pin Assignments

Pin Number	Function
Pin 1	+Vin
Pin 2	Enable (On/Off)
Pin 3	Case (AEH)
Pin 4	-Vin
Pin 5	- Output
Pin 6	- Sense
Pin 7	Trim
Pin 8	+ Sense
Pin 9	+ Output

### Notes:

- Measured at 20 MHz bandwidth with external 10uF tantalum in parallel with 0.1uF/50V-7R ceramic capacitor placed across the output.
- All specifications are typical at nominal line, full load, and 25°C unless otherwise noted.
- All specifications subject to change without notice. Mechanical drawings are for reference only.
- Technical Reference Notes should be consulted for detailed information when available.
- Warranty: 1yr

## Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

## Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

## Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.PowerConversion.com](http://www.PowerConversion.com)

[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

## Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

## EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2008 Emerson Electric Co.