

# NAL40 Series

Single, dual and triple output

- 5.0 x 3.0 x 1.2 inch package (1U applications)
- Ideal for high volume designs
- Industry standard package
- Overvoltage and short circuit protection
- 40W with free air convection
- EN55022, EN55011 conducted emissions level A



The NAL40 series are 40W universal input AC/DC power supplies on a 5 x 3 inch card with a maximum component height of 1.2 inch for use in 1U applications. These series are available with a wide range of models in the industry standard 5 x 3 inch footprint at low cost making the series ideal for new and existing high volume communication and industrial applications. The NAL40 meets level A conducted emissions. The NAL40 series provide 40W of output power with free air convection cooling with a peak output of 50W for a maximum duration of 60 seconds. The NAL40 series are designed for use in high volume low power data networking, computer and telecom applications such as hubs, routers, POS terminals, cable modems and PABX's. This list is not exclusive as the generic feature set of both series with industry standard output configurations provide a solution for most high volume applications including many industrial applications.

CE (LVD)

2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

Line regulation	Main output	±0.5%
	Auxiliary outputs	±1.0%
Total regulation	Main output	±3.0%
	Auxiliary outputs	±5.0%
Overshoot/undershoot	At turn-on	≤10%
Transient response	+5.1V	±150mV max. dev.,
	(1.5A to 3A step)	500µs recovery
Temperature coefficient		±0.02%/°C
Overvoltage protection	+5.1V output	6.25V ±0.75V <sub>out</sub>
Output power limit	Primary power	50W P <sub>out</sub> , min.
	limited	110W P <sub>in</sub> , max.
Short circuit protection	Multiple output	30 seconds
	Single 12V, 15V, 24V and 48V	Continuous automatic recovery

### INPUT SPECIFICATIONS

Input voltage range	Universal input	90 to 264VAC
		120 to 370VDC
Input frequency range		47Hz to 440Hz
Input surge current	110VAC, cold start	15A
	230VAC, cold start	32A
Safety ground leakage current	110VAC, 60Hz	0.2mA
	230VAC, 50Hz	0.4mA

### EMC CHARACTERISTICS

Conducted emissions	EN55022, FCC part 15	level A
Radiated emissions	EN55022, FCC part 15	level A
ESD air	EN61000-4-2, level 3	Perf. criteria 2
ESD contact	EN61000-4-2, level 4	Perf. criteria 2
Surge	EN61000-4-5, level 3	Perf. criteria 2
Fast transients	EN61000-4-4, level 3	Perf. criteria 2
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2

### GENERAL SPECIFICATIONS

Hold-up time	110VAC	10ms @ 40W
	230VAC	60ms @ 40W
Efficiency		68% min. @ 40W
Isolation voltage	Input/output	3000VAC
	Input/chassis	1500VAC
Switching frequency		Variable
Approvals and standards (See Note 9)	VDE0805, EN60950, IEC950	
	BABT, IEC1010, UL1950	
	CSA C22.2 No. 950	
Weight		200g (7.06oz)
MTBF	MIL-HDBK-217F	150,000 Hours

### ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating	0°C to +70°C
	Non-operating	-40°C to +85°C
	0°C to 50°C ambient, convection cooled	40W
	50°C to 70°C, ambient conv. cooled	Derate linearly to half load
	Peak (0°C to 50°C) max. 60s	50W
Relative humidity	Non-condensing	5% to 95% RH
Altitude	Operating	10,000 feet max.
	Non operating	30,000 feet max.
Vibration	Three orthogonal axes, random vibration, 10 minute test for each axis	2.4G rms
		5Hz to 500Hz

# NAL40 Series


Single, dual and triple output

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE (4)	TOTAL REG. (5)	MODEL NUMBER (B)
	MAX (1)	PEAK (2)	FAN (3)			
+ 5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAL40-7608 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	
-12V (I <sub>C</sub> )	0.35A	1A	0.5A	120mV	±5.0%	
+5.1V	3A	7A	4A	45mV	±3.0%	NAL40-7628 (8)
+12V	0.35A	3A	0.5A	110mV	±5.0%	
-12V	0.35A	1A	0.5A	110mV	±5.0%	
+5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAL40-7607 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	
-5V (I <sub>C</sub> )	0.35A	1.0A	0.5A	50mV	±5.0%	
+5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAL40-7610 (5)
+15V (I <sub>B</sub> )	1.5A	3A	1.5A	160mV	+13% -0%	
-15V (I <sub>C</sub> )	0.35A	1A	0.5A	150mV	±5.0%	
+5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAL40-7629 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	
5V	6A	10A	8A	50mV	±3.0%	NAL40-7605
12V	3.3A	5A	4A	120mV	±3.0%	NAL40-7612
15V	2.6A	4A	3.3A	150mV	±3.0%	NAL40-7615
24V	1.6A	2.5A	2A	240mV	±3.0%	NAL40-7624
48V	0.8A	1A	1A	480mV	±3.0%	NAL40-7617

## Notes

- 1 Natural convection cooling (40W maximum).
- 2 Peak output current lasting less than 60 seconds with duty cycle less than 5%. During peak loading, output voltage may exceed total regulation limits.
- 3 Forced air, 20CFM at 1 atmosphere, 50W maximum.
- 4 Figure is peak-to-peak. Output noise measurements are made across a 50MHz bandwidth using a 12 inch twisted pair, terminated with a 47µF capacitor.
- 5 Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits, load currents within stated limits and output voltages adjusted to their factory settings. For multiple output units to maintain stated regulation then:  
 $0.25 \leq I_A / I_B \leq 5$ , for  $I_B > 0.3A$   
 $0.50 \leq I_A / I_B \leq 5$ , for  $I_B < 0.3A$   
 Minimum load must also be 4W to achieve design MTBF.  
 For maximum output current  $I_C$  on triple-output models, i.e. for:  
 $I_C = I_{Max.}$ , then  $I_A \text{ min.} \geq 0.5A$  and  $I_B \geq I_C$ .  
 This does not apply to the NAL40-7628 which has a separately regulated output, see note 8.
- 6 Derating curve is application specific for ambient temperatures >50°C, for optimum reliability, no part of the heatsink should exceed 120°C, and no semiconductor case temperature should exceed 130°C.
- 7 Caution: allow a minimum of 1 second after disconnecting line power when making thermal measurements.
- 8 The NAL40-7628 has separately linear regulated +12V and -12V outputs. The loading conditions in note 5 do not apply.
- 9 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

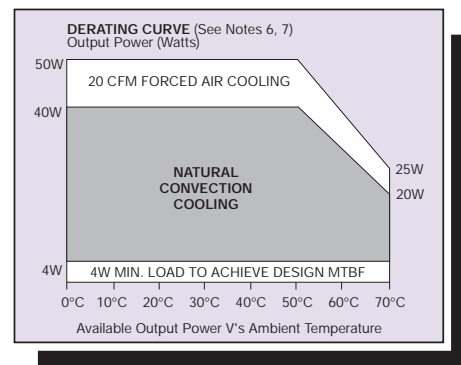

# NAL40 Series

Single, dual and triple output

## Mechanical Notes


- A** Ground pad encircling mounting hole near P1 allows system grounding through a metal stand-off of up to 8mm max. diameter to metal chassis.
- B** A standard L-bracket and cover is available for mounting, which contains all screws, connectors and necessary mounting hardware. Order part number 'NAL40 COVER KIT'.

### AC (J1) mating connector

Molex 09-50-3031 or equiv. with Molex 08-50-0105 or equiv. crimp terminals.

### DC (J2) mating connector

Molex 09-50-3061 or equiv. with Molex 08-50-0164 or equiv. crimp terminals.

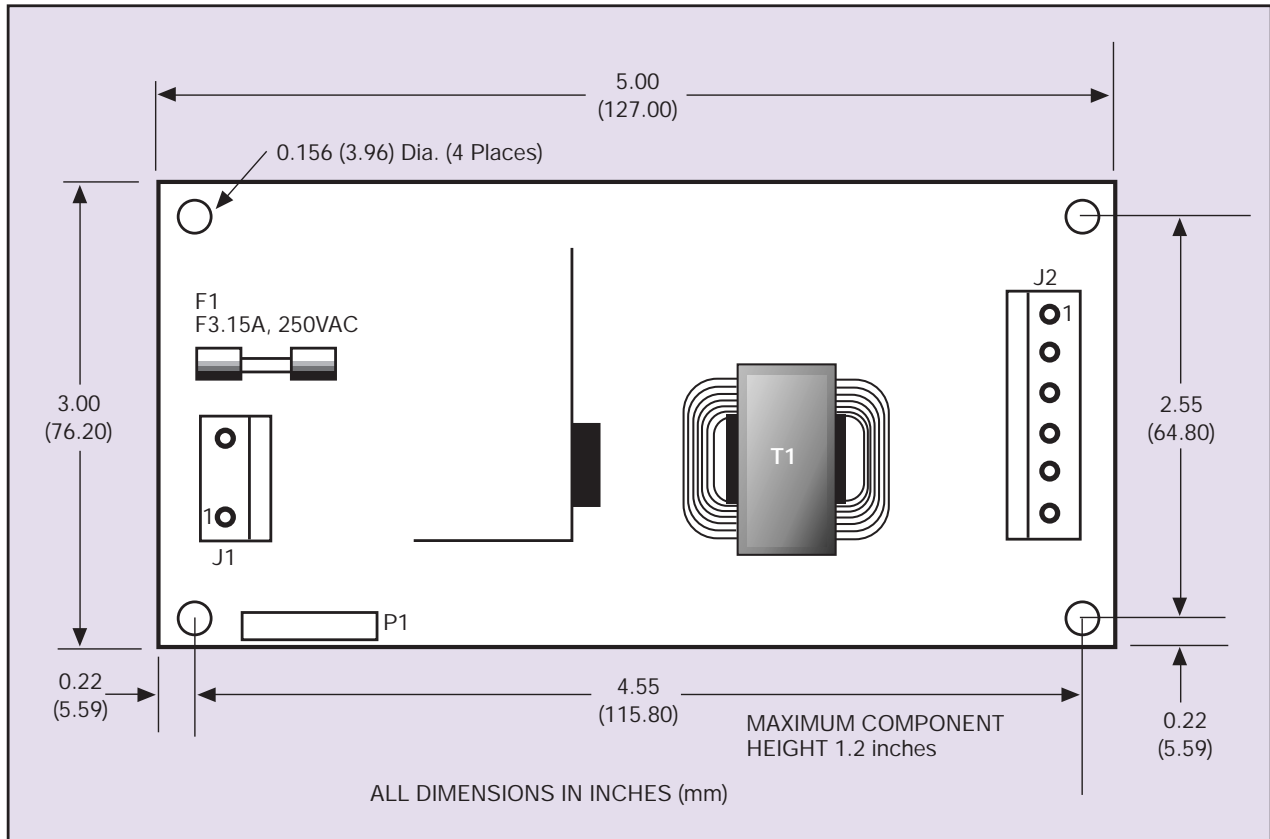

## International Safety Standard Approvals

VDE0805/EN60950/IEC950/IEC1010 File No. 10401-3336-1076  
Licence No. 70567, 1076 and 90354

UL1950 File No. E136005

CSA C22.2 No. 950 File No. LR41062C

Certificate No. PS/605108

INPUT PIN CONNECTIONS		OUTPUT PIN CONNECTIONS			
J1		J2	SINGLE	DUAL	TRIPLE
Pin 1	AC Neutral	P1	+Vout	+12V	V (B)
Pin 2	No Pin	P2	+Vout	+5.1V	V (A)
Pin 3	AC Line	P3	+Vout	+5.1V	V (A)
P1		P4	Return	Return	Return
Pin 1	Safety Ground	P5	Return	Return	Return
		P6	Return	N/C	V (C)

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.