



Materials:

- Insulator: P.B.T. Glass Filled, UL94V-0
- Soldering Temperature: 235°C
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Color: Black

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

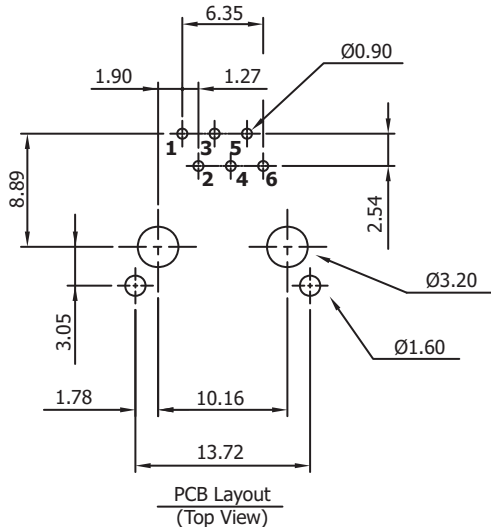

Unit: MM

| | | | | | | | | | |
|-----------|-------|--|--|--|--|--|----------|--------------|---|
| Scale | 1:1 | | | | | | | Name | Item No. |
| TOLERANCE | | | | | | | | Drawn | 12.21.11 |
| X.X | ±0.40 | | | | | | | Chappell | A-2004-0-4-LP/S-R |
| X.XX | ±0.25 | | | | | | Approved | | |
| X.XXX | ±0.15 | | | | | | | | |
| Angle | ±3° | | | | | | | | |
| | | | | | | | | | Title |
| | | | | | | | | | Very Low Profile PCB Jack - RJ11, 90°, Shielded, Side Entry, 6μ" |
| | | | | | | | | | Drawing No. |
| | | | | | | | | | rev00 |
| | | | | | | | | | Replace |
| | | | | | | | | | Sheet |
| | | | | | | | | Modification | Date |
| | | | | | | | | Name | |

