


PIN ASSIGNMENT			
P1		P2	
1	GND	1	
2		2	
3		3	
4	GND	4	
5		5	
6		6	
7	GND	7	

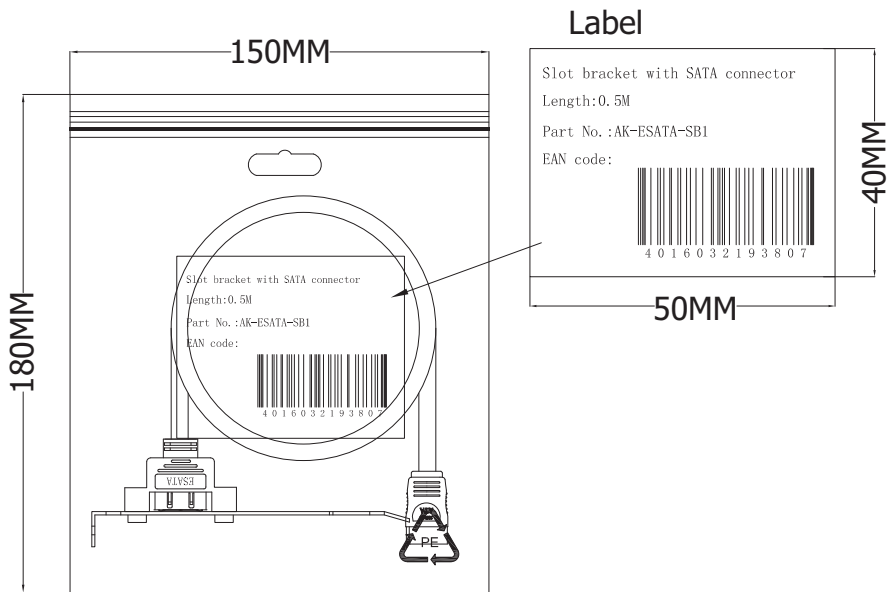

Material:

- Cable: UL2725 [26AWG(1/0.404)*2+D(1/0.32)*2+AL]*2F
 - OD 2.2*7.8MM
 - Jacket Red (200C/RD-16#)
- P1 Connector: eSATA 7P/M Solder Type
 - Pin G/F
 - Insulator Black Metal
 - Shell Plate Nickel
- P2 Connector: Serial ATA Female 7Pin
 - Pin G/F
 - Crimp type connector
 - Insulator Black
- Screw: M3.0*10MM (M3.0 screwcap)

Electrical:

- 100% Open Short & Miswire Test
- Conductive Resistance: 2Ω (Max.)
- Insulation Resistance: 5MΩ (Min.)
- Hi-Pat Test 300V DC

⊕ = Assmann logo



<i>ITEM NO.</i>	AK-ESATA-SB1-R
<i>TITLE</i>	Slotbracket with External Serial ATA(eSATA) Single connector

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2009 by Assmann Electronic Components
All International Rights Reserved