

1

2

3



4

900±30

HPDB68M

HPDB50M

Configuration:
HPDB68M HPDB50M

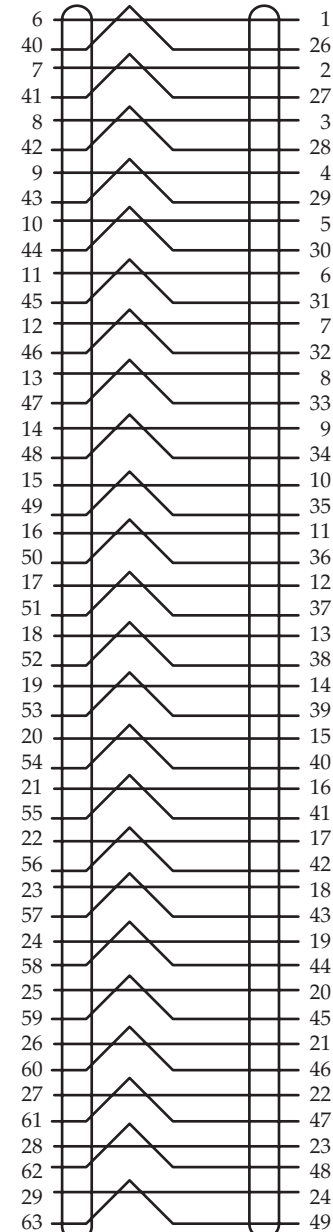

Material:

- 1. Cable: UL2919, #28,25P+AL/MY+1+B O.D:9.5(I.D=0.75)
- 2. Connector:HPDB68M, I.D.C
HPDB50M,I.D.C
- 3.Thumbscrew:#2-56UNC
- 4.Copper Tape:(10x135)+(35x110)
(10x105)+(25x85)

Note:

- 1.Total Length:900±30mm
Cable Cut:950mm
- 2.Color: Beige
- 3.Molded Type
- 4.360°Solder

Description

Name :
AK-Y1303-R
HPDB68 Male-HPDB50 Male

ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4