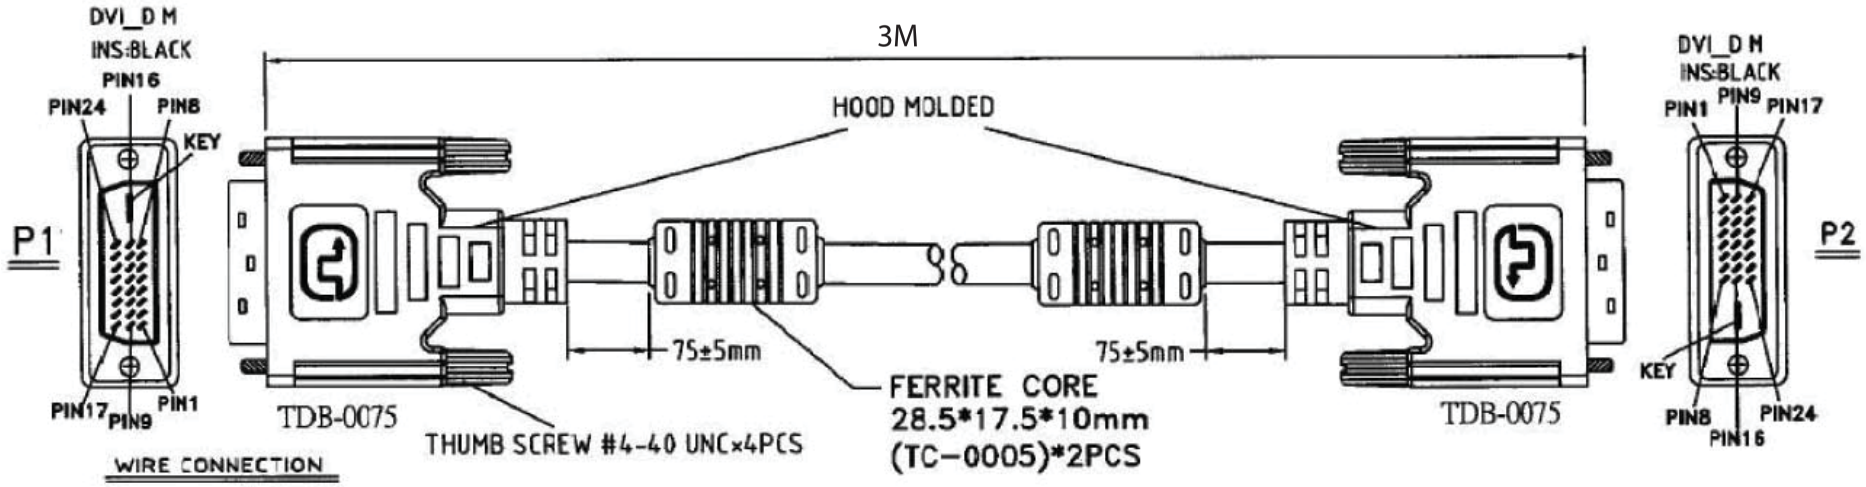

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

Material:

- Cable: UL20276 [28AWG(7/0.127 T.C)*1Pair+Drain Wire+AL/Mylar+Mylar]*7C
  +28AWG(7.0.127 T.C)*1Pair+28AWG(7/0.127 T.C)*3C+AL/MY+D.W(0.127)+Braid Shields(85%)
  PVC Jacket: OD:8.6±0.15MM
  Color: Black(NK-K01), (C20276324-1)
- Connector: P1&P2: DVI 25P: 24P+Key Male, Gold Flash Contact, Nickel Plated Shell
- Shield: P1 & P2 Copper Foil 360° soldered to connector shell & cable shielding
- Hood P1&P2: Molded Type, PVC 45P, Color: Black

Electrical:

- 100% Open Short & Mis Wire Test
- Contact Resistance: 3Ω Max
- Insulation Resistance: 10Ω Min
- Hi-Pot Voltage 300V DC

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	11.07.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.

AK621N-3-R

Title

DVI-D <=> DVI-D Dual Link Cable, 3 Meters

Drawing No.

rev00

Replace

Sheet