


Vertical Male




Series 7200 – Style B 22, 154 Contacts




- Up to 110 signal contacts and 44 ground shield contacts in 5 or 5+2 rows of 22 positions
- Designed for gas tight press-fit installations
- Used in position P2 and P5 of the CompactPCI® specification
- Should be used in conjunction with a type A or AB connector
- Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 57)

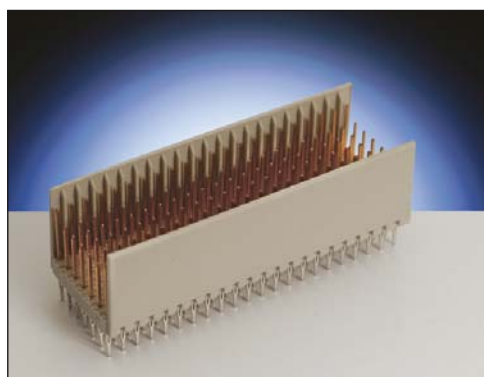

DIMENSIONS: millimeters (inches)

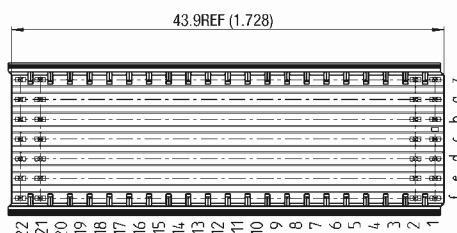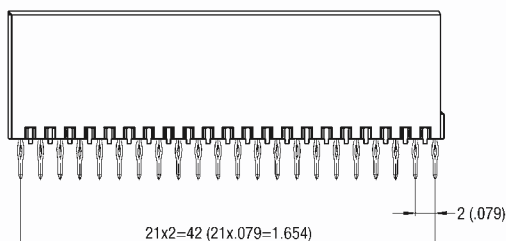

LAYOUT

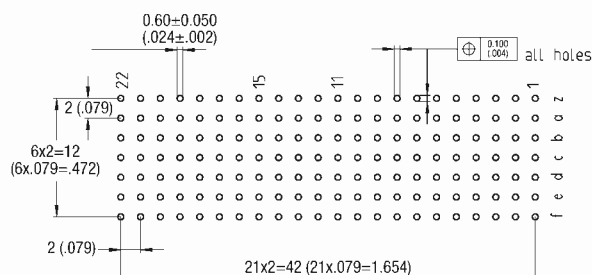

Vertical Male

Style B 22 – 154 Contacts



Pin Loading	Contacts	Performance Class	Part Number
	154	2	17 7200 154 200 002
	154	2	17 7200 154 201 002
P2/ P5 CompactPCI® 	154	2	17 7200 154 202 005
P2/ P5 CompactPCI® 	154	2	17 7200 154 203 005
P2/ P5 CompactPCI® 	154	2	17 7200 154 204 005
	110	2	17 7200 110 200 012
CompactPCI® Computer Telephony 	132	2	17 7200 132 211 002

Technical description and dimensions see page 36

AVX will custom load connectors with any combination of the contacts in the table on page 39. Complete the form on page 57 and fax it to the number shown.