

Model: SCD 4 Series


Double-Deck Spring Terminals







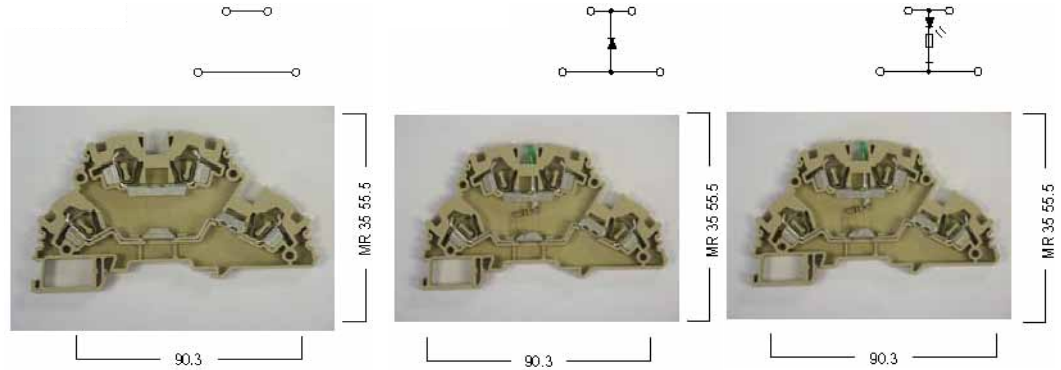

Description

Double level spring terminals are the answer to high wiring density problems posed by certain unavoidable wiring arrangements.

This double level terminals have the following advantages:

- Double wiring density available without extension mounting rails
- Interconnection/jumpering can be done at both levels
- Marking/identification by making tags possible at both levels.



	SCD4 width: 6mm			SCD4D width: 6mm			SCD 4LD width: 6mm		
Electrical ratings									
Voltage/Current/Cross section	750V~/30A/4mm ²			750V~/30A/4mm ²			750V~/30A/4mm ²		
UL/cUL	600V~/20A			600V~/20A			600V~/20A		
Insulation stripping length	12mm			12mm			12mm		
Connection Data									
Solid Strand, Screw Connection	0.75-4mm ²			0.75-4mm ²			0.75-4mm ²		
Fine Strand, Screw Connection	0.75-4mm ²			0.75-4mm ²			0.75-4mm ²		
AWG Conductor	26.....10			26.....10			26.....10		
Ordering Data									
Poliamide 6.6	Cat. No	Qty		Cat. No	Qty		Cat. No	Qty	
	SCD4BEIGE	50		SCD4DBEIGE	20		SCD4LDBEIGE24AC	20	
							SCD4LDBEIGE24DC	20	
							SCD4LDBEIGE110AC	20	
Electrical ratings									
Didoe Reverse Voltage				1000V					
Diode Current				1A					
Mounting Rails									
MR 35 X 7.5 Slotted	Type	Cat. No	Qty	Type	Cat. No	Qty	Type	Cat. No	Qty
MR 35 X 15 Slotted	Slotted	ERS35	1m	Slotted	ERS35	1m	Slotted	ERS35	1m
	Slotted	ERS35-HPP	1m	Slotted	ERS35-HPP	1m	Slotted	ERS35-HPP	1m
									
End Bracket									
	Cat. No	Qty		Cat. No	Qty		Cat. No	Qty	
ES1	ES4BEIGE	25		ES4BEIGE	25		ES4BEIGE	25	
For 35mm Din									
Cross-Connection									
	CCS4/2	25		CCS4/2	25		CCS4/2	25	
	CCS4/3	20		CCS4/3	20		CCS4/3	20	
	CCS4/4	15		CCS4/4	15		CCS4/4	15	
	CCS4/10	5		CCS4/10	5		CCS4/10	5	
Group Marking									
	GM	GMBEIGE	50	GMBEIGE	50		GMBEIGE	50	