




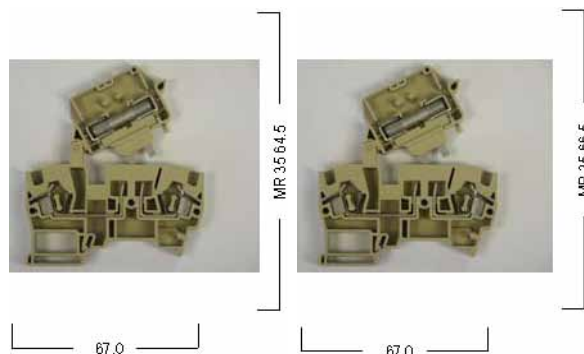






## Model: SFTD Series

*Disconnects**Description*

Some circuits require disconnecting means without re-wiring. B&B Electronics offers 2 types of screwless disconnects, both with a rating of 24A. 20pieces/package. Beige.



	SFTD3 width: 8mm			SFTD4 width: 8mm		
<b>Electrical ratings</b>						
Voltage/Current/Cross section	500V~/10A/4mm <sup>2</sup>			500V~/10A/4mm <sup>2</sup>		
UL/UL	600V~/10A			600V~/10A		
Insulation stripping length	12mm			12mm		
<b>Connection Data</b>						
Solid Strand, Screw Connection	0.5....4mm <sup>2</sup>			0.5....4mm <sup>2</sup>		
Fine Strand, Screw Connection	0.5....4mm <sup>2</sup>			0.5....4mm <sup>2</sup>		
AWG Conductor	26....10			26....10		
<b>Ordering Data</b>	Cat. No	Qty		Cat. No	Qty	
Poliamide 6.6	SFTD3BEIGE	20		SFTD4BEIGE	20	
<b>Mounting Rails</b>	Type	Cat. No	Qty	Type	Cat. No	Qty
MR 35 X 7.5 Slotted	Slotted	ERS35	1m	Slotted	ERS35	1m
MR 35 X 15 Slotted	Slotted	ERS35-HPP	1m	Slotted	ERS35-HPP	1m
						
ERS35						
						
ERS35-HPP						
<b>End Bracket</b>	Cat. No	Qty		Cat. No	Qty	
 ES1	ES4BEIGE	100		ES4BEIGE	100	
For 35mm Din						
<b>End Plate</b>						
Thickness 1.5mm EP Poliamide 6.6	EPSCF3BEIGE	10		EPSCF3BEIGE	10	
						
<b>Cross-Connection</b>						
	CCS4/2	25		CCS4/2	25	
	CCS4/3	20		CCS4/3	20	
	CCS4/4	15		CCS4/4	15	
	CCS4/10	5		CCS4/10	5	
<b>Group Marking</b>						
 GM	GMBEIGE	50		GMBEIGE	50	