## PERM-D-PADS® **TO-5 and Integrated Circuit Mounts**




White or Natural Nylon, per ASTM D4066 PA111, UL Rated 94V-2


Oxygen Rating Index: Over 28%


## **Standard Drawing Tolerances:**

(unless otherwise indicated) Fractions: ± 1/64 (0.4)  $.XX = \pm 0.01 (0.25)$ .X = ±0.10 (2.5)  $XXX = \pm 0.005 (0.13)$ 



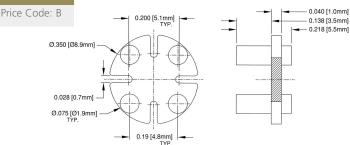


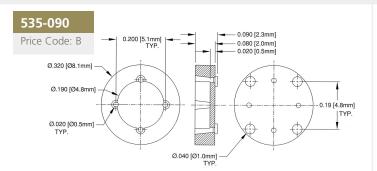


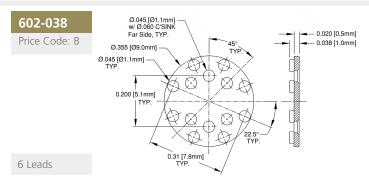

609-075 0.055 [1.4mm] -0.075 [1.9mm] -Price Code: B Ø.036 [Ø0.9mm] w/ Ø.050 C'SINK Far Side, TYP. 45 Ø.365 [Ø9.3mm]  $\mathfrak{O}$ Ø 0.200 [5.1mm] | TYP. -22.5° Q (1) 0.31 [7.8mm] Ø.050 [Ø1.3mm] TYP. 6 Leads





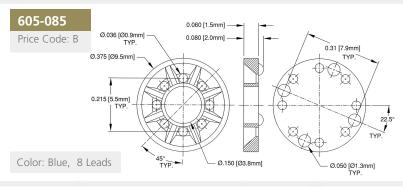

616-070 A55485 / 02-004N M38527 / 02-004N Price Code: B TYP. 0.030 [0.8mm] 0.200 [5.1mm] TYP. - 0.070 [1.8mm] Ø.200 [Ø5.1mm] Ø.040 [Ø1.0mm] TYP. 22.5° / TYP. ţ Ø.024 [Ø0.6mm] TYP. 0.32 [8.0mm] Ø.365 [Ø9.3mm] TYP 8 Leads