



Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF3020CBF Series Power RF Terminations / Resistors


General Specifications

Substrate.....Beo
Resistive Film.....Thick Film
Tab.....Ag
Cover Substrate.....AL203
Mounting Flange.....Cu plated with Ni
Resistance.....50 Ω
Tolerance..... $\pm 5\%$
Packaging.....100 pcs./tray


Absolute Ratings

Power.....10 W
Frequency.....4.0 GHz
VSWR.....1.35 Maximum
Capacitance.....0.8 pF

Characteristic Curve

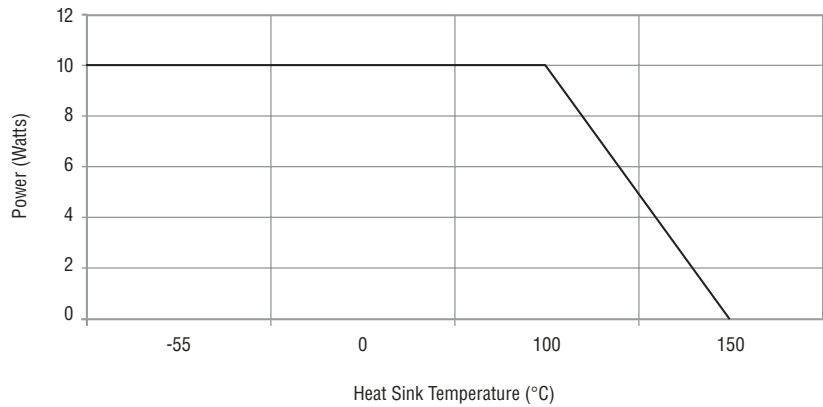

Product Dimensions

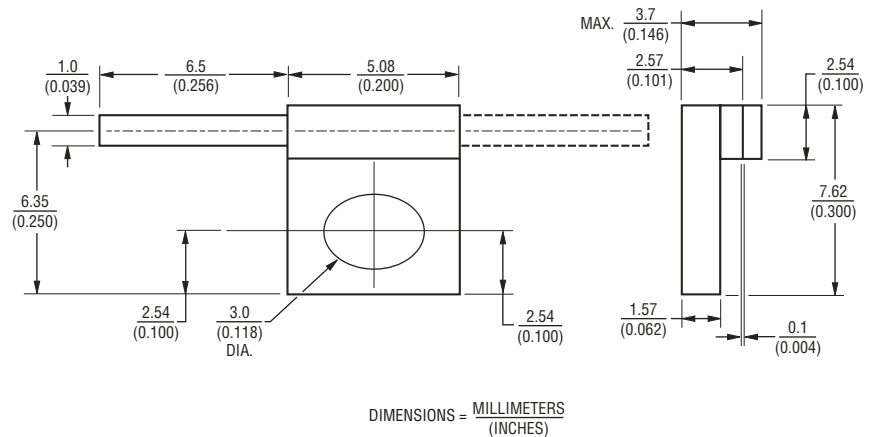

Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
Fax: +1-951 781-5700

www.bourns.com

How To Order

CHF 3020 C B F 500 L

Model _____
Size _____
Version _____
Substrate _____
Mount _____
F = Flange
Value _____
500 = 50 Ohm
Function _____
L = Termination
R = Resistor