


SPECIAL SWITCH FORM

ALL DIMS. AND TOLS. PER ANSI Y14.5			DATE	C&K PART NUMBER	C&K REV.
		NAME DATE SCALE APPR.	DATE	11TL602	l A
			APPR.		/ \
		SCALE		DESCRIPTION	
TOLERANCES		UNLESS OTHERWISE SPECIFIED		SWITCH 11TL INTER-LOCK SS-FORM	
DECIMAL	ANGLE	DIMENSIONS ARE IN INCHES		CUSTOMER NAME	IPLATE NO.
.XX± .XXX±	±	THIS DOCUMENT AN	ID THE INFORMATION IVE PROPERTY OF	C&K COMP.	
CRITICAL - MUST COMPLY WITH C&K QUALIFICATION STD. CKQ10019		C&K COMPONENTS INC. AND IS NOT		CUSTOMER PART NUMBER	CUST. REV.
MAJOR DIMENSION		EXPRESS WRITTEN PERMISSION OF C&K COMPONENTS, INC.		11TL602	NP

NOTES:

- 1. STAMP SWITCH PER C&K/UNIMAX SPEC 7.18.3 (G6).
- 2. ASSEMBLE PER ROUTER AND BILL OF MATERIAL.
- 3. BASIC SWITCH IS TYPE 3TM.
- 4. UNIT PART NO. APPEAR ON BRACKET PER 34-415.
- 5. RIVETING TO BE DONE ON BRACKET SIDE AND TO BE FLUSH OR BELOW SURFACE OF BRACKET.
- 6. PLUNGER TO BE SPRAYED WITH DRY LUBE BEFORE ASSEMBLING WITH BRACKET.

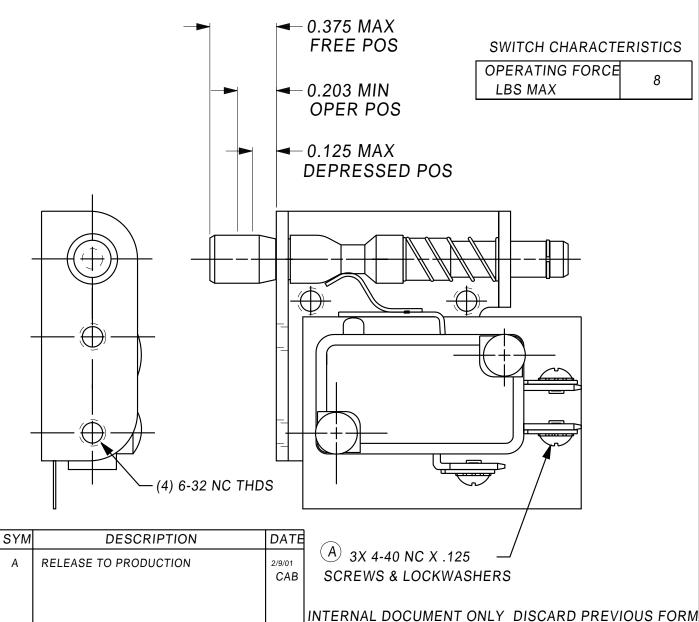

CAD FILE NO .: 11tl602

ECN

9828