

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 500 V (50~60HZ) 60 Sec.

操作力 Operating Force (gf)	A → B	350 ± 100
	(L)	150 ± 100
负荷寿命 Operating Life With Load		10,000 次 Cycles


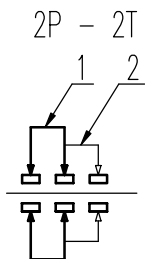


示意图 SCHEMATIC

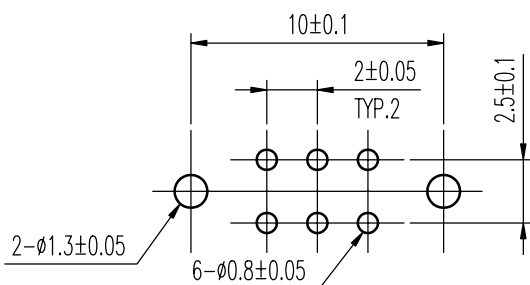

安装孔 PIERCING PLAN

06	弹片 SPRING PLATE	C5210R	1	NATURAL				
05	端子 TERMINAL	C2680R	6	Ag PLATED				
04	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW				
03	接触片 CONTACT	C5210R	2	Ag CLAD				
02	胶柄 KNOB	P B T	1	MG 4.5, 5				
01	铁壳 FRAME	S P C C	1	Sn PLATED BLACKENED	标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM1265-01			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH		ITEM NO	SK-22D01-MG		
UNDER 1	± 0.10	DRAWN	朱传芳	2007-12-22	VERSION	A01	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	2007-12-22	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	程先金	2007-12-22	PROJECTION			

**COMAX** ELECTRONICS (HUIZHOU) CO.,LTD.