



THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	8/1/17	

NOTES:

- MATERIAL:
INSULATOR BODY: POLYAMIDE (NYLON), BLACK
PLUG BODY - BRASS, NICKEL PLATED.
BNC CENTER & BANANA PLUG CONTACT - BeCu ALLOY, NICKEL PLATED.
DIELECTRIC - POLYAMIDE (NYLON), RED.
- SPECIFICATIONS:
IEC VOLTAGE (IEC 61010): 1,000 V CAT II / 600 V CAT III.
CURRENT: 3 A MAX.
OPERATING TEMPERATURE: 0° C TO +50° C.
- CE DECLARATION OF CONFORMITY.
CONFORMS TO RoHS 2.
EXEMPTION: ANNEX III, 6(c) - COPPER ALLOY CONTAINS UP TO 4% LEAD BY WEIGHT.
- STANDARD PACKAGEING: 5 PCS. PER PACK.

MODEL NUMBER
CT3889

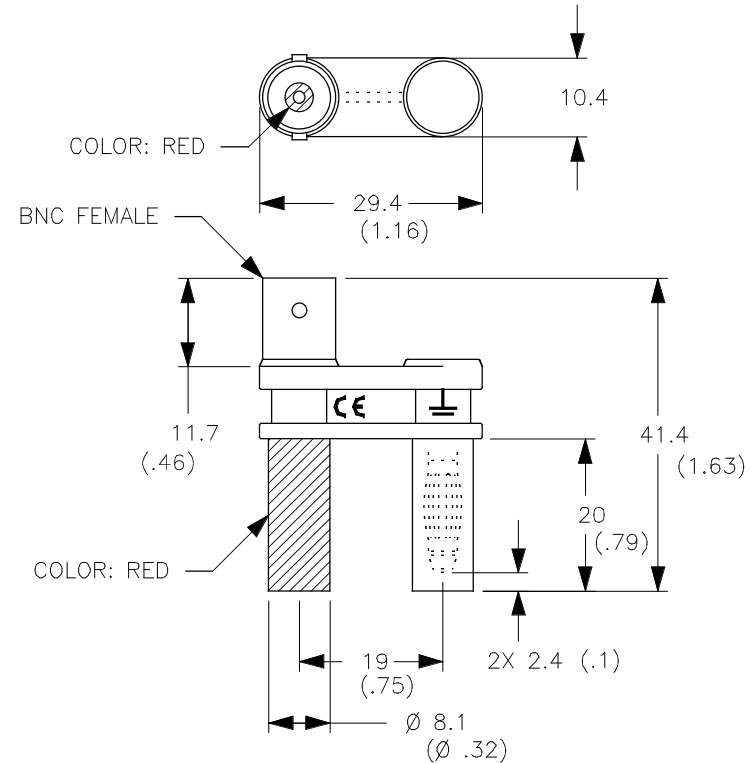

METRIC

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
DECIMALS ANGLE
.X ± 0.8 ± 2°
.XX ± 0.25
DO NOT SCALE DRAWING

CONTRACT NO.

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

APPROVALS	DATE
DRAWN WDH	8/1/17


TITLE
**ADAPTER, INSULATED BNC FEMALE TO
SHEATH DOUBLE 4 mm BANANA PLUGS**

THIRD ANGLE PROJECTION

MATERIAL

CHECKED

SIZE A	CAGE CODE 43F45	DWG. NO. P388900	REV. -
------------------	---------------------------	----------------------------	-----------



FINISH

ENGR.

DESIGN ACTIVITY

SCALE 1:1	SHEET 1 OF 1
--------------	-----------------