# **SPECIFICATIONS**


"Preliminary data"

Model Number: CR0412HB-D51





## **Mechanical Drawing:**

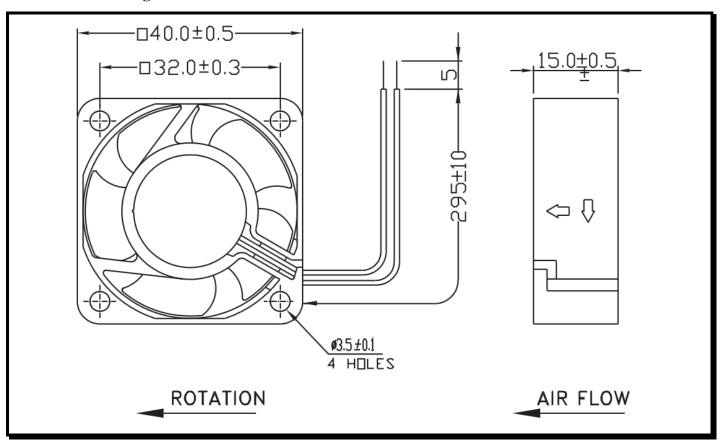

#### Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.11 AmpsPower Input = 1.32 Watts Speed = 8000 RPMBearings = BallAir Flow = 8.48 CFMStatic Pressure: = 0.25 Inch of H2O Acoustic  $= 36.0 \, dB(A)$ 

**Construction:** 

Weight

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000

= 27.0 g

hours at 40°C.

## **Additional Features:**

Brushless DC Motor Locked Rotor Protection Polarity Protected

**Automatic Restart Capability** 

Version:

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

### **Termination:**

 $295\pm10$  mm Lead wires, AWG 26, UL 1007

**Agency Approvals:** UL, CUL, TUV, CE