SPECIFICATIONS


"Preliminary data"

Model Number: CR0812LB-D9*GP





Mechanical Drawing:

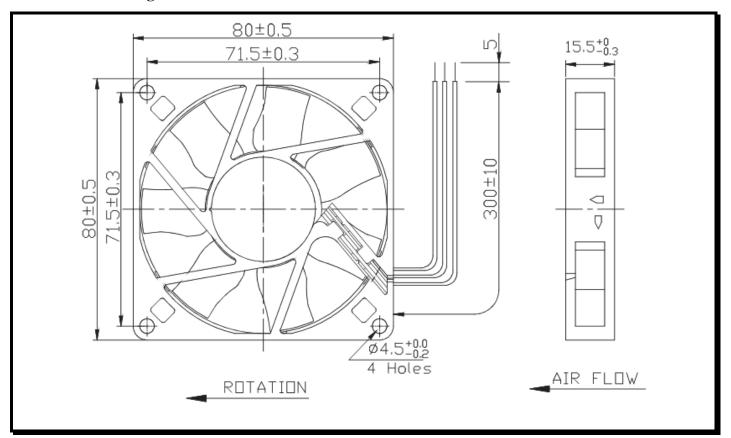

Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.07 AmpsPower Input = 0.84 WattsSpeed = 2000 RPMBearings = Ball

Air Flow = 22.64 CFMStatic Pressure: = 0.06 Inch of H2O

Acoustic = 22.1 dB(A)Weight = 63.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000

hours at 40°C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

-10° C to 70° C Operating Temperature: Storage Temperature: -40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals: UL, CUL, TUV, CE