SPECIFICATIONS


"Preliminary data"

Model Number: CR0824LB-D90(T)





Mechanical Drawing:

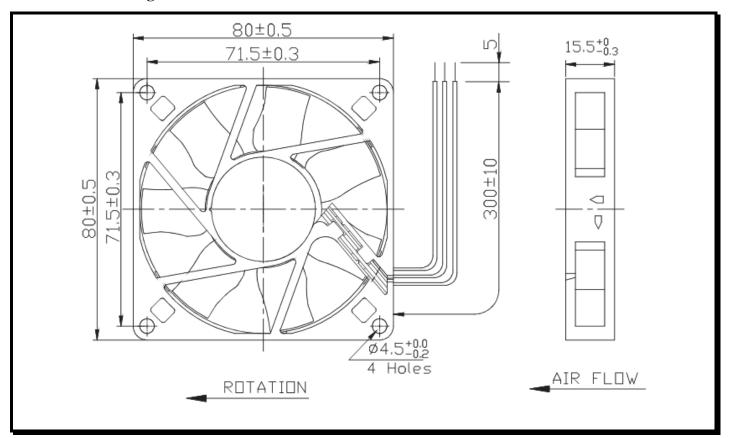

Motor:

Nominal Voltage = 24 VDC
Nominal Running Current = 0.05 Amps
Power Input = 1.20 Watts
Speed = 3000 RPM
Bearings = Ball

Air Flow = 29.58 CFM Static Pressure: = 0.12 Inch of H2O

Acoustic = 36 dB(A)Weight = 63.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000 hours at 40° C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals: UL, CUL, TUV, CE